



**FORUM**  
LIGHTING SOLUTIONS

# FORUM

LIGHTING SOLUTIONS



# CONTENTS

## ZINK

### OUTDOOR & SENSORS

Wall/Lantern  
 Ground/Deck Lights  
 Post/Wall Lights  
 Festoon Light  
 Deck Light  
 Door Number  
 Security & Floodlights  
 Work Lights  
 Outdoor Heating  
 Switches/Sockets  
 Sensors

## ZINK

### SOLAR

Post/Lantern  
**Ground**  
**Wall Lights**  
**PIR Wall Lights**  
**Security & Floodlights**  
**Spike Lights**  
**Deck Lighting**  
**Festoon**

## COAST

### OUTDOOR

Post Lights  
 Lanterns  
 Bulkheads  
 Wall  
 Guide Lights  
 Ground/Spike  
 Security & Floodlights

## ELECTRALITE

### COMMERCIAL

LED Strip  
 LED Strip Accessories  
 Under Cabinet  
 LED Battens  
 T-Grid Lighting  
 Recessed/Downlights

## SPA

### BATHROOM

Ceiling/Wall  
 Spotlights  
 Flush  
 Recessed  
 Wall  
 Mirrors  
 Smart Toilets

## SPA PRO

### PREMIUM

Collections

## CULINA

### KITCHEN

Under Cabinet  
 Kinetic Switching  
 Konect Plug + Play  
 Sockets/QI Charging  
 Track Lighting  
 Plinth  
 LED Battens

## INLIGHT

### INDOOR & LED LAMPS

Plaster Lights  
 Spotlights  
 Recessed/Downlights  
 Picture Light  
 Task Lighting  
 Cable Sets  
 Shades  
 LED Lamps

## STANLEY

### SITE LIGHTING

Security & Floodlights  
 Torches  
 Portable  
 Festoon

## INFO

Marketing  
 Lighting Terms  
 Colour Temp Guide  
 IP Rating  
 Bathroom Zoning  
 Index







## OUTDOOR

Domestic external lighting in both modern and traditional designs. Including ZINK Radiant Heaters, suitable for domestic or commercial applications are extremely efficient and effective. We also offer a range of LED compatible PIR, photocell and microwave sensors.

|                        |         |
|------------------------|---------|
| WALL/LANTERN           | 5-61    |
| POST/WALL LIGHTS       | 62-68   |
| GROUND/DECK LIGHTS     | 69-73   |
| FESTOON                | 74      |
| DECK LIGHTS            | 75-77   |
| DOOR NUMBER            | 78-79   |
| SECURITY & FLOODLIGHTS | 80-85   |
| WORK LIGHTS            | 86-87   |
| OUTDOOR HEATING        | 114-137 |
| SOCKETS/SWITCHES       | 138-139 |
| SENSORS                | 140-149 |

**NEW****IP54**

- Solid brass construction
- Available in 2 finishes



Bronze



Brass

## BRAC Downlight


IP54  
Rated

Class 1




0.49kg


| Code          | Description    | Finish | Lamp                   | Dimensions                  |
|---------------|----------------|--------|------------------------|-----------------------------|
| ZN-41101-BRNZ | Brac Downlight | Bronze | 1 x 7W max<br>LED GU10 | W:72mm H:120mm<br>Proj:85mm |
| ZN-41101-RBRS |                | Brass  |                        |                             |

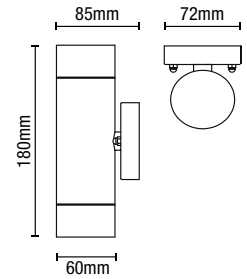**NEW****IP54**

- Solid brass construction
- Available in 2 finishes



Bronze



Brass

## BRAC Up/Down Wall Light

IP54  
Rated

Class 1




0.71kg

| Code          | Description                | Finish | Lamp                   | Dimensions                  |
|---------------|----------------------------|--------|------------------------|-----------------------------|
| ZN-41102-BRNZ | Brac Up/Down<br>Wall Light | Bronze | 2 x 7W max<br>LED GU10 | W:72mm H:180mm<br>Proj:85mm |
| ZN-41102-RBRS |                            | Brass  |                        |                             |

NEW

IP65



- Die-cast aluminium construction
- Available in 2 finishes



Anthracite



Black

## MORRO

Long Up/Down Wall Light



IP65  
Rated



Class 1




0.88kg

| Code          | Description                   | Finish     | Lamp                | Dimensions                   |
|---------------|-------------------------------|------------|---------------------|------------------------------|
| ZN-40001-BLK  | Morro Long Up/Down Wall Light | Black      | 2 x 7W max LED GU10 | W:75mm H:300mm<br>Proj:110mm |
| ZN-40001-ANTH |                               | Anthracite |                     |                              |

**NEW**  
FOR  
2023

**IP54**

**460**  
Lumens



- Die-cast aluminium construction
- Wall mounted
- 9W LED
- K: 4000
- Lm: 460
- Lm/W: 51.1



## BUDE


Coil LED Wall Light



| Code         | Finish | Description              | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|--------------|--------|--------------------------|-----------|------------|-----------------|-------------------|----------------------------|
| ZN-42066-BLK | Black  | Bude Coil LED Wall Light | 12W       | 4000k      | 540             | 45                | H:280mm W:100mm Proj:103mm |

**NEW**  
FOR  
2023

**IP44**



- Steel & glass construction



## CHESIL


Wall Lantern



| Code         | Description         | Finish | Lamp                    | Dimensions                 |
|--------------|---------------------|--------|-------------------------|----------------------------|
| ZN-42095-BLK | Chesil Wall Lantern | Black  | 1 x 10W max LED E27 GLS | W:320mm H:240mm Proj:380mm |

NEW  
FOR  
2023

IP44



Stainless Steel

- Stainless steel construction

## BREAN

Up/Down Wall Light



IP44  
Rated



Class 1




1.4kg

| Code         | Description              | Finish          | Lamp                | Dimensions                |
|--------------|--------------------------|-----------------|---------------------|---------------------------|
| ZN-42019-SST | Brean Up/Down Wall Light | Stainless Steel | 2 x 7W max LED GU10 | W:75mm H:305mm Proj:112mm |

NEW  
FOR  
2023

IP44

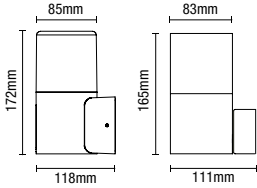

- Aluminium & PC construction
- Available in 2 round or square


## BEATA Downlight



| Code            | Description     | Shape  | Lamp                       | Dimensions                | Weight  |
|-----------------|-----------------|--------|----------------------------|---------------------------|---------|
| ZN-41099-GRYSMK | Beata Downlight | Round  | 1 x 10W max<br>LED E27 GLS | W:85mm H:172mm Proj:118mm | 0.448kg |
| ZN-41100-GRYSMK |                 | Square |                            | W:83mm H:165mm Proj:111mm | 0.53kg  |

NEW  
FOR  
2023

IP44



- Aluminium & PC construction


## BEATA Up/Down Wall Light



| Code            | Description              | Finish     | Lamp                       | Dimensions                   |
|-----------------|--------------------------|------------|----------------------------|------------------------------|
| ZN-41711-GRYSMK | Beata Up/Down Wall Light | Grey/Smoke | 2 x 10W max<br>LED E27 GLS | W:85mm H:330mm<br>Proj:110mm |

NEW  
FOR  
2023

IP54



- Die-cast aluminium, PC and glass construction
- Available with or without photocell sensor

## EOS Up/Down Wall Light





| Code         | Description               | Sensor    | Lamp                   | Dimensions                |
|--------------|---------------------------|-----------|------------------------|---------------------------|
| ZN-32255-BLK | Eos Up/Down Wall Light    | -         | 2 x 7W max<br>LED GU10 | W:80mm H:225mm Proj:110mm |
| ZN-35072-BLK | Eos Up/Down Wall Light w/ | Photocell |                        |                           |







IP44

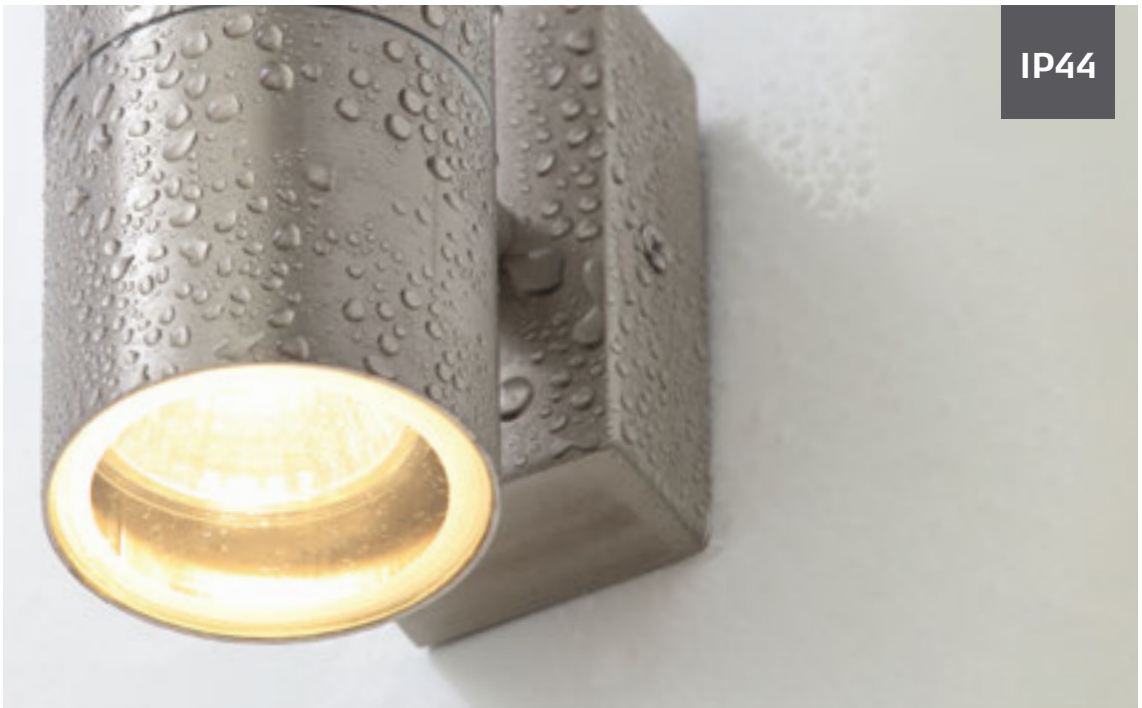

- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Comes in 6 different finishes
- PIR & Photocell versions available



## LETO

Up/Down Wall Light




Available in 6 colour options

| Code            | Finish             | Description             | Lamp                   | Dimensions                |
|-----------------|--------------------|-------------------------|------------------------|---------------------------|
| ZN-20941-SST    | Stainless Steel    | Leto Up/Down Wall Light | 2 x 7W max<br>LED GU10 | H:160mm W:60mm Proj:110mm |
| ZN-20941-POLSST | Polished Stainless |                         |                        |                           |
| ZN-20941-BLK    | Black              |                         |                        |                           |
| ZN-20941-WHT    | White              |                         |                        |                           |
| ZN-20941-ANTH   | Anthracite         |                         |                        |                           |
| ZN-20941-COP    | Copper             |                         |                        |                           |

IP44







- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Adjustable lux, sensitivity and timer
- Up to 8m detection distance
- Comes in 4 different finishes



## LETO

Up/Down Wall Light with PIR




| Code          | Finish  | Description                      | Lamp                | Dimensions                |
|---------------|---|----------------------------------|---------------------|---------------------------|
| ZN-29179-SST  | Stainless Steel  | Leto Up/Down Wall Light with PIR | 2 x 7W max LED GU10 | H:215mm W:68mm Proj:107mm |
| ZN-29179-BLK  | Black            |                                  |                     |                           |
| ZN-29179-ANTH | Anthracite       |                                  |                     |                           |
| ZN-29179-COP  | Copper           |                                  |                     |                           |

IP44



- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Photocell sensor
- Available in 2 finishes

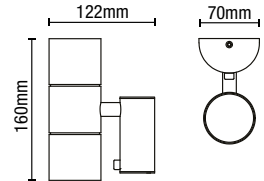

## LETO

Up/Down Wall Light with Photocell Sensor





| Code         | Finish          | Description                            | Lamp                | Dimensions                |
|--------------|-----------------|--|---------------------|---------------------------|
| ZN-34022-SST | Stainless Steel | Leto Up/Down Wall Light with Photocell | 2 x 7W max LED GU10 | H:160mm W:70mm Proj:122mm |
| ZN-34022-BLK | Black           |  |                     |                           |



IP44

Ø60mm



- Constructed from [301] stainless steel
- Outdoor ceiling light ideal for porches
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options

## LETO Porch Light



Class 1




0.4kg

| Code          | Description         | Finish     | Lamp                   | Dimensions       |
|---------------|---------------------|------------|------------------------|------------------|
| ZN-37939-BLK  | Leto<br>Porch Light | Black      | 1 x 7W max<br>LED GU10 | H:105mm Dia:60mm |
| ZN-37939-ANTH |                     | Anthracite |                        |                  |
| ZN-37939-WHT  |                     | White      |                        |                  |
| ZN-37939-COP  |                     | Copper     |                        |                  |

IP44




- Stainless steel [301] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options
- Multi-function PIR

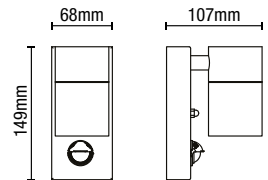

## LETO

Downlight with PIR Sensor




Available in 5 colour options

| Code          | Description    | Finish          | Lamp                | Dimensions                |
|---------------|----------------|-----------------|---------------------|---------------------------|
| ZN-37938-BLK  | Leto Downlight | Black           | 1 x 7W max LED GU10 | H:149mm W:68mm Proj:107mm |
| ZN-37938-SST  |                | Stainless Steel |                     |                           |
| ZN-37938-ANTH |                | Anthracite      |                     |                           |
| ZN-37938-WHT  |                | White           |                     |                           |
| ZN-37938-COP  |                | Copper          |                     |                           |

IP44



- Stainless steel [301] construction
- Part of a full range of exterior fittings including, wall, ceiling, ground or spike
- 5 colour options



# LETO

Downlight



Class 1



0.4kg




Available in 5 colour options

| Code          | Description    | Finish          | Lamp                | Dimensions                |
|---------------|----------------|-----------------|---------------------|---------------------------|
| ZN-37940-BLK  | Leto Downlight | Black           | 1 x 7W max LED GU10 | H:115mm W:60mm Proj:110mm |
| ZN-37940-SST  |                | Stainless Steel |                     |                           |
| ZN-37940-ANTH |                | Anthracite      |                     |                           |
| ZN-37940-WHT  |                | White           |                     |                           |
| ZN-37940-COP  |                | Copper          |                     |                           |



IP44

NEW  
COLOUR  
OPTION



- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Comes in 5 different finishes

## LETO

### Adjustable Spotlight




| Code          | Finish          | Description               | Lamp                | Dimensions                |
|---------------|-----------------|---------------------------|---------------------|---------------------------|
| ZN-26536-SST  | Stainless Steel | Leto Adjustable Spotlight | 1 x 7W max LED GU10 | H:144mm W:85mm Proj:196mm |
| ZN-26536-BLK  | Black           |                           |                     |                           |
| ZN-26536-WHT  | White           |                           |                     |                           |
| ZN-26536-COP  | Copper          |                           |                     |                           |
| ZN-26536-ANTH | Anthracite      |                           |                     |                           |










**IP44**


- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Screw in spike or deck mount included
- Cable length: 500mm
- Available in 2 finishes

## LETO

### Dual Mount Ground Spotlight



| Code         | Finish          | Description               | Lamp                | Dimensions                |
|--------------|-----------------|---------------------------|---------------------|---------------------------|
| ZN-29180-SST | Stainless Steel | Leto Dual Mount Spotlight | 1 x 7W max LED GU10 | H:276mm W:60mm Proj:107mm |
| ZN-29180-BLK | Black           |                           |                     |                           |

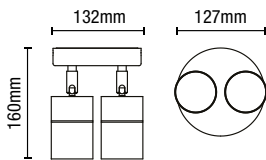

**IP44**

- IP44 rated
- Constructed from [301] stainless steel and clear glass
- Available in 2 finishes


## LETO

### Adjustable Twin Spotlight



| Code         | Finish          | Description                    | Lamp                | Dimensions                 |
|--------------|-----------------|--------------------------------|---------------------|----------------------------|
| ZN-34018-SST | Stainless Steel | Leto Adjustable Twin Spotlight | 2 x 7W max LED GU10 | H:132mm W:127mm Proj:160mm |
| ZN-34018-BLK | Black           |                                |                     |                            |

IP44

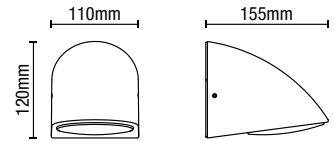

- IP44 rated
- Die-cast aluminium construction

## NEVIS



Downlight



| Code         | Finish | Description     | Lamp                | Dimensions                 |
|--------------|--------|-----------------|---------------------|----------------------------|
| ZN-35740-BLK | Black  | Nevis Downlight | 1 x 7W max LED GU10 | H:120mm W:110mm Proj:155mm |

900 Lumens


IP65

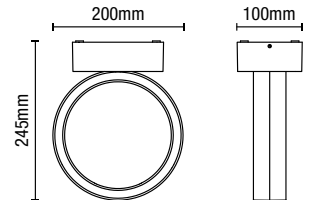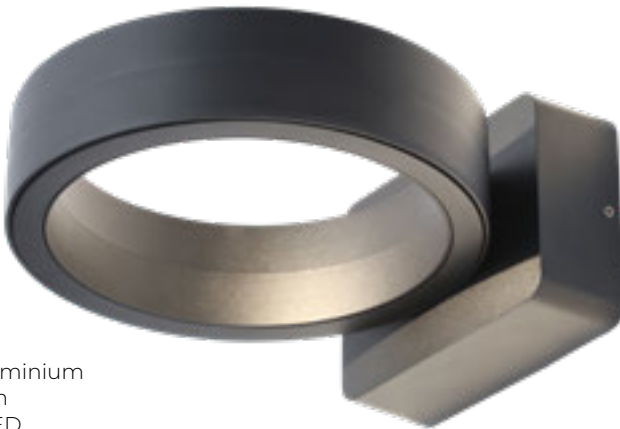

- Die-cast aluminium construction
- 16W COB LED
- K: 4000
- Lm: 900
- Lm/W: 56.25

## KITT

LED Halo Wall Light




| Code         | Finish | Description              | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions               |
|--------------|--------|--------------------------|-----------|------------|-----------------|-------------------|--------------------------|
| ZN-35739-BLK | Black  | Kitt LED Halo Wall Light | 16W       | 4000k      | 900             | 56.25             | H:100mm W:200mm Proj:245 |







**700  
Lumens**

**IP54**

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 5.4W COB LED
- K: 4000
- Lm: 700
- Lm/W: 130



## REIMS Wall Light


| Code         | Finish | Description      | Power (w) | Colour (k) | Total Flux (lm) | Dimensions               |
|--------------|--------|------------------|-----------|------------|-----------------|--------------------------|
| ZN-38637-BLK | Black  | Reims Wall Light | 5.4W      | 4000k      | 700             | H:50mm W:165mm Proj:35mm |







**700  
Lumens**

**IP65**

- Die-cast aluminium construction
- Opal diffuser
- 12W LED module (SMD)
- K: 4000
- Lm: 700
- Lm/W: 58



## CORTE Wall Light







| Code         | Finish | Description      | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|--------------|--------|------------------|-----------|------------|-----------------|----------------------------|
| ZN-38634-BLK | Black  | Corte Wall Light | 12W       | 4000k      | 700             | H:115mm W:165mm Proj:209mm |

620  
Lumens


IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



## MAUI

LED Up/Down Wall Light




| Code         | Finish | Description           | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|--------|-----------------------|-----------|------------|-----------------|-------------------|---------------------------|
| ZN-29995-BLK | Black  | Mau LED Up/Down Light | 8W        | 4000k      | 620             | 77.5              | H:110mm W:110mm Proj:95mm |

620  
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



## HANA

LED Up/Down Wall Light




| Code         | Finish | Description            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|--------|------------------------|-----------|------------|-----------------|-------------------|---------------------------|
| ZN-29996-BLK | Black  | Hana LED Up/Down Light | 8W        | 4000k      | 620             | 77.5              | H:110mm W:110mm Proj:95mm |



**700  
Lumens**

**IP65**

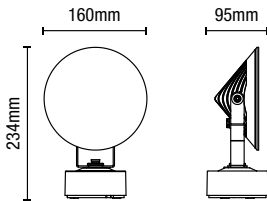

Ground Spike Light

Spotlight





3 Different Mounting Options

Wall Light

- Die-cast aluminium construction
- Includes ground spike
- Cable length: 150mm
- 12W COB LED
- K: 4000
- Lm: 700
- Lm/W: 58

# GORDA

LED Spotlight with Ground Spike







| Code         | Finish | Description         | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|--------------|--------|---------------------|-----------|------------|-----------------|-------------------|----------------------------|
| ZN-35741-BLK | Black  | Gorda LED Spotlight | 12W       | 4000k      | 700             | 58                | H:234mm W:160mm Proj:195mm |

620  
Lumens

IP54

- Die-cast aluminium construction
- Wall mounted
- 8W LED
- K: 4000
- Lm: 620
- Lm/W: 77.5



## MANU



LED Up/Down Wall Light



| Code         | Finish | Description                 | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                   |
|--------------|--------|-----------------------------|-----------|------------|-----------------|-------------------|------------------------------|
| ZN-29993-BLK | Black  | Manu Up/Down LED Wall Light | 8W        | 4000k      | 620             | 77.5              | H:123mm W:130mm<br>Proj:70mm |

IP44

- Die-cast aluminium construction
- Polycarbonate diffuser

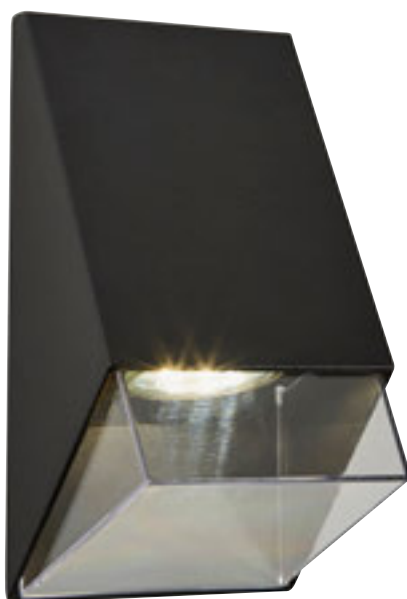

## SENS

Angled Wall Light



| Code         | Description            | Finish | Lamp                | Dimensions                   |
|--------------|------------------------|--------|---------------------|------------------------------|
| ZN-38631-BLK | Sens Angled Wall Light | Black  | 1 x 7W max LED GU10 | Proj:92mm W:102mm<br>H:180mm |



**Upto  
400  
Lumens**

**IP54**


- Available in 2 sizes
- Die-cast aluminium

**6W LED**

- K: 4000
- Lm: 275
- Lm/W: 45

**12W LED**

- K: 4000
- Lm: 400
- Lm/W: 33

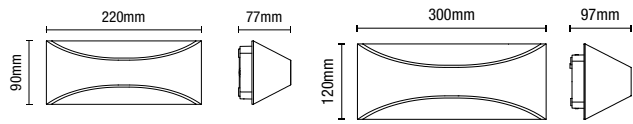


# STROUD

LED Up/Down Wall Light

| Code         | Description                         | Lamp    | Lumen | Dimensions                |
|--------------|-------------------------------------|---------|-------|---------------------------|
| ZN-31768-BLK | Stroud Small LED Up/Down Wall Light | 6W LED  | 275   | H:90mm W:220mm Proj:77mm  |
| ZN-31767-BLK | Stroud Large LED Up/Down Wall Light | 12W LED | 400   | H:120mm W:300mm Proj:97mm |



**IP43**



- PIR sensor option available

# VESOUL

Wall Light


| Code          | Description                       | Finish     | Lamp                | Dimensions                |
|---------------|-----------------------------------|------------|---------------------|---------------------------|
| ZN-38623-ANTH | Vesoul Wall Light                 | Anthracite | 1 x 7W max LED GU10 | Proj:94mm W:138mm H:181mm |
| ZN-38624-ANTH | Vesoul Wall Light with PIR sensor |            |                     |                           |

500  
Lumens

IP54



- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 50



## PAU Bulkhead



IP54  
Rated



4000K  
CW



Class 1



0.5kg



Available in  
3 colour options

| Code          | Finish     | Description  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                       |
|---------------|------------|--------------|-----------|------------|-----------------|----------------------------------|
| ZN-38621-ANTH | Anthracite | Pau Bulkhead | 10W       | 4000k      | 500             | H:108mm<br>W:220mm<br>Proj:121mm |
| ZN-38621-BLK  | Black      |              |           |            |                 |                                  |
| ZN-38621-WHT  | White      |              |           |            |                 |                                  |




**280  
Lumens**

**IP54**



- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- K: 4000
- Lm: 280
- Lm/W: 28




# RENNES

LED Guide/Wall Light



| Code          | Finish     | Description                 | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                      |
|---------------|------------|-----------------------------|-----------|------------|-----------------|---------------------------------|
| ZN-38622-ANTH | Anthracite | Rennes LED Guide/Wall Light | 10W       | 4000k      | 280             | H:130mm<br>W:180mm<br>Proj:88mm |
| ZN-38622-BLK  | Black      |                             |           |            |                 |                                 |
| ZN-38622-WHT  | White      |                             |           |            |                 |                                 |

IP44

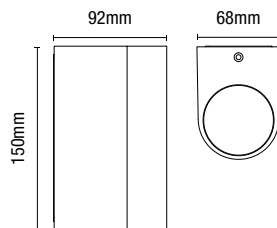

- IP44 rated
- Available in 2 finishes



## ANTAR

Up/Down Light



| Code         | Finish | Description              | Lamp                | Dimensions               |
|--------------|--------|--------------------------|---------------------|--------------------------|
| ZN-20930-BLK | Black  | Antar Up/Down Wall Light | 2 x 7W max LED GU10 | Proj:92mm W:68mm H:150mm |
| ZN-20930-SIL | Silver |                          |                     |                          |

IP44

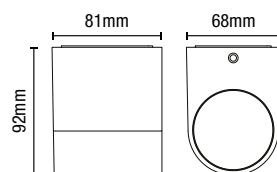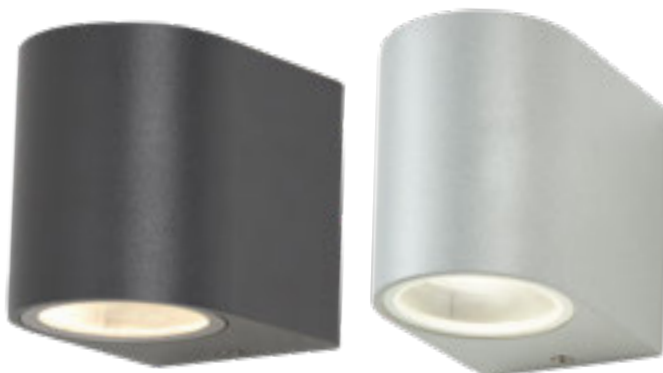


- IP44 rated
- Available in 2 finishes

## ANTAR

Downlight



| Code         | Finish | Description     | Lamp                | Dimensions              |
|--------------|--------|-----------------|---------------------|-------------------------|
| ZN-29181-BLK | Black  | Antar Downlight | 1 x 7W max LED GU10 | Proj:81mm W:68mm H:92mm |
| ZN-29181-SIL | Silver |                 |                     |                         |

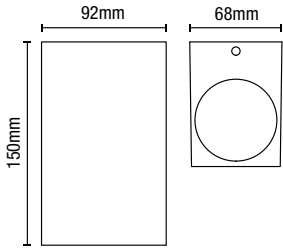

**IP44**



- IP44 rated
- Available in 2 finishes

## FLEET

### Square Up/Down Light



| Code          | Finish     | Description                     | Lamp                | Dimensions               |
|---------------|------------|---------------------------------|---------------------|--------------------------|
| ZN-31759-ANTH | Anthracite | Fleet Square Up/Down Wall Light | 2 x 7W max LED GU10 | Proj:92mm W:68mm H:150mm |
| ZN-31759-SIL  | Silver     |                                 |                     |                          |

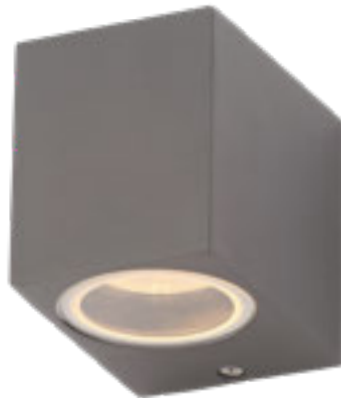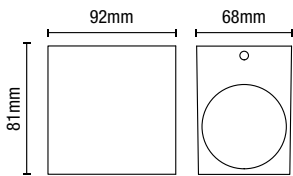

**IP44**

- IP44 rated
- Available in 2 finishes



## FLEET

### Square Downlight



| Code          | Finish     | Description            | Lamp                | Dimensions              |
|---------------|------------|------------------------|---------------------|-------------------------|
| ZN-31758-ANTH | Anthracite | Fleet Square Downlight | 1 x 7W max LED GU10 | Proj:92mm W:68mm H:81mm |
| ZN-31758-SIL  | Silver     |                        |                     |                         |

IP44



- IP44 rated
- Die-cast aluminium construction

## MOKU

Up/Down Wall Light




| Code         | Finish | Description             | Lamp                   | Dimensions               |
|--------------|--------|-------------------------|------------------------|--------------------------|
| ZN-29992-BLK | Black  | Moku Up/Down Wall Light | 1 x 9W LED Max E27 GLS | H:94mm W:360mm Proj:78mm |

480 Lumens

IP54



- Aluminium body with glass diffuser
- 9W LED module (SMD)
- K: 4000
- Lm: 408
- Lm/W: 53

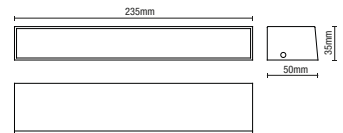

## CANNES

Linear Wall Light



| Code          | Finish     | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions               |
|---------------|------------|------------------------------|-----------|------------|-----------------|--------------------------|
| ZN-38636-ANTH | Anthracite | Cannes LED Linear Wall Light | 9W        | 4000k      | 480             | H:50mm W:235mm Proj:33mm |




**850  
Lumens**

**IP44**

- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85

## MELO Up/Down Wall Light



| Code         | Finish          | Description             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                   |
|--------------|-----------------|-------------------------|-----------|------------|-----------------|------------------------------|
| ZN-33460-BLK | Black           | Melo Up/Down Wall Light | 10W       | 4000k      | 850             | H:180mm W:86mm<br>Proj:123mm |
| ZN-33460-SST | Stainless Steel |                         |           |            |                 |                              |




**850  
Lumens**

**IP44**



- Stainless steel construction
- 10W LED module (SMD)
- K: 4000
- Lm: 850
- Lm/W: 85
- Photocell sensor


## MELO Up/Down Wall Light with Photocell Sensor

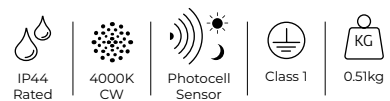

| Code         | Finish          | Description             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                   |
|--------------|-----------------|-------------------------|-----------|------------|-----------------|------------------------------|
| ZN-34555-BLK | Black           | Melo Up/Down Wall Light | 10W       | 4000k      | 850             | H:180mm W:86mm<br>Proj:123mm |
| ZN-34555-SST | Stainless Steel |                         |           |            |                 |                              |







IP44




- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor


• Photocell option available

## LENS

### Up/Down Wall Light



| Code          | Sensor    | Description             | Lamp                | Dimensions                 |
|---------------|-----------|-------------------------|---------------------|----------------------------|
| ZN-29189-ATR  | -         | Lens Up/Down Wall Light | 2 x 7W max LED GU10 | H:187mm W:102mm Proj:140mm |
| ZN-34042-ANTH | Photocell |                         |                     |                            |



IP44



- IP44 rated
- Die-cast aluminium construction Anthracite finish
- Available with or without photocell sensor

• Photocell option available

## LENS

### Downlight



| Code          | Sensor    | Description    | Lamp                | Dimensions                 |
|---------------|-----------|----------------|---------------------|----------------------------|
| ZN-29190-ATR  | -         | Lens Downlight | 1 x 7W max LED GU10 | H:155mm W:102mm Proj:140mm |
| ZN-34043-ANTH | Photocell |                |                     |                            |








- IP44 rated
- Die-cast aluminium construction
- Black ridged finish
- Available with or without photocell sensor



**IP44**

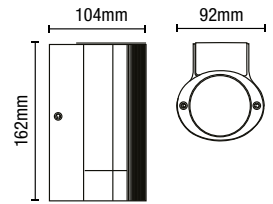

## HELIX Downlight



Photocell  
Sensor



IP44  
Rated



Class 1



0.8kg


| Code         | Sensor    | Description      | Lamp                   | Dimensions                   |
|--------------|-----------|------------------|------------------------|------------------------------|
| ZN-35593-BLK | -         | Helix Down Light | 1 x 7W max<br>LED GU10 | H:162mm W:92mm<br>Proj:104mm |
| ZN-35686-BLK | Photocell |                  |                        |                              |



- IP44 rated
- Die-cast aluminium construction
- Black ridged finish
- Available with or without photocell sensor



**IP44**

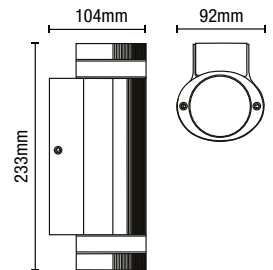

## HELIX Up/Down Wall Light



Photocell  
Sensor



IP44  
Rated



Class 1




0.93kg

| Code         | Sensor    | Description                 | Lamp                   | Dimensions                   |
|--------------|-----------|-----------------------------|------------------------|------------------------------|
| ZN-35594-BLK | -         | Helix Up/Down<br>Wall Light | 2 x 7W max<br>LED GU10 | H:233mm W:92mm<br>Proj:104mm |
| ZN-35685-BLK | Photocell |                             |                        |                              |


1200  
Lumens

IP54

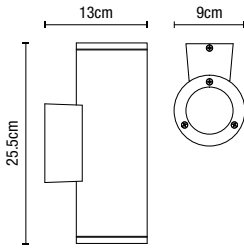

- Die-cast aluminium construction
- 3 colour options available
- 20W LED module (SMD)
- Lm/W: 60
- Hrs: 30,000


## MIZAR Up/Down Wall Light



| Code          | Finish     | Description              | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                      |
|---------------|------------|--------------------------|-----------|------------|-----------------|---------------------------------|
| ZN-34019-ANTH | Anthracite | Mizar Up/Down Wall Light | 20W       | 4000k      | 1200            | H:255mm<br>W:90mm<br>Proj:130mm |
| ZN-34019-BLK  | Black      |                          |           |            |                 |                                 |
| ZN-34019-WHT  | White      |                          |           |            |                 |                                 |


740  
Lumens

IP54




- Die-cast aluminium construction
- 3 colour options available
- 10W LED module (SMD)
- Lm/W: 74
- Hrs: 30,000

## MIZAR Downlight



| Code          | Finish     | Description     | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                      |
|---------------|------------|-----------------|-----------|------------|-----------------|---------------------------------|
| ZN-34020-ANTH | Anthracite | Mizar Downlight | 10W       | 4000k      | 740             | H:255mm<br>W:90mm<br>Proj:130mm |
| ZN-34020-BLK  | Black      |                 |           |            |                 |                                 |
| ZN-34020-WHT  | White      |                 |           |            |                 |                                 |



**IP44**




- Die-cast aluminium construction
- Available in 3 finishes

## SKYE

Double Cone Up/Down Wall Light



| Code          | Description                         | Finish     | Lamp                | Dimensions                     |
|---------------|-------------------------------------|------------|---------------------|--------------------------------|
| ZN-29347-SIL  | Skye Double Cone Up/Down Wall Light | Silver     | 2 x 7W max LED GU10 | H:220mm<br>W:77mm<br>Proj:90mm |
| ZN-29347-BLK  |                                     | Black      |                     |                                |
| ZN-29347-ANTH |                                     | Anthracite |                     |                                |



**130 Lumens**

**IP44**



- Remote control operated
- Steel construction
- 5W RGB LED module (SMD)
- K: 4000
- Lm: 130
- Hrs: 20,000


## ASHBY

RGB LED Up/Down Light



| Code         | Finish | Description                      | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                   |
|--------------|--------|----------------------------------|-----------|------------|-----------------|------------------------------|
| ZN-31765-BLK | Black  | Ashby RGB LED Up/Down Wall Light | 5W        | RGB        | 130             | H:180mm W:65mm<br>Proj:115mm |

IP44

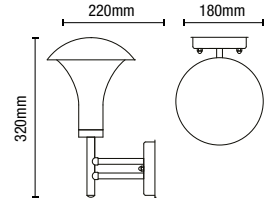

- Steel & PC construction
- Fluted lantern design

## OMEGA

Wall Lantern



IP44  
Rated




Class 1



0.63kg

| Code         | Description        | Finish          | Lamp                    | Dimensions                 |
|--------------|--------------------|-----------------|-------------------------|----------------------------|
| ZN-15136-SST | Omega Wall Lantern | Stainless Steel | 1 x 10W max LED E27 GLS | Proj:220mm W:180mm H:320mm |

IP44



- Stainless steel construction
- Durable polycarbonate diffuser
- Available in 2 finishes

## DELTA

Slat Wall Lantern



IP44  
Rated




Class 1



0.55kg

| Code         | Description             | Finish          | Lamp                    | Dimensions                 |
|--------------|-------------------------|-----------------|-------------------------|----------------------------|
| ZN-15871-SST | Delta Slat Wall Lantern | Stainless Steel | 1 x 10W max LED E27 GLS | H:260mm W:100mm Proj:115mm |
| ZN-15871-BLK |                         | Black           |                         |                            |

IP23

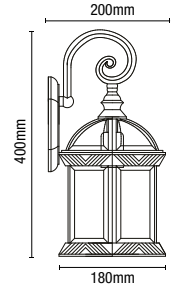

- Aluminium and glass construction
- Antique brass finish

## EMILE

Wall Lantern



IP23  
Rated



Class 1




1.5kg

| Code         | Description        | Finish        | Lamp                       | Dimensions                    |
|--------------|--------------------|---------------|----------------------------|-------------------------------|
| ZN-29203-ABR | Emile Wall Lantern | Antique Brass | 1 x 10W max<br>LED E27 GLS | Proj:200mm W:180mm<br>H:400mm |

274  
Lumens

IP54



- Diecast aluminium construction
- 4.5W LED
- K: 4000
- Lm: 274

## LEIGH

LED Wall Light



IP54  
Rated



4000K  
CW




Class 1


| Code         | Description          | Finish | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                   |
|--------------|----------------------|--------|-----------|------------|-----------------|------------------------------|
| ZN-29962-BLK | Leigh LED Wall Light | Black  | 4.5W      | 4000k      | 274             | H:65mm W:140mm<br>Proj:105mm |

NEW

IP44



- Stainless steel [201] construction
- Available in 2 finishes
- Mesh insert design



brass mesh



stainless steel mesh

## GADA Wall Light



IP44  
Rated




Class 1



0.75kg

| Code             | Description     | Finish                          | Lamp                   | Dimensions                    |
|------------------|-----------------|---------------------------------|------------------------|-------------------------------|
| ZN-40004-BLK/BRS | Gada Wall Light | Black with Brass Mesh           | 1 x 10W max<br>LED E27 | W:102mm H:280mm<br>Proj:160mm |
| ZN-40004-BLK/SST |                 | Black with Stainless Steel Mesh |                        |                               |

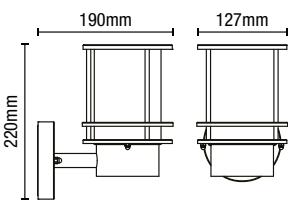

- Stainless steel construction
- Durable polycarbonate shade
- Available in 2 finishes



IP44

## LEONIS

Wall Lantern



IP44  
Rated



Class 1




0.83kg

| Code         | Description         | Finish          | Lamp                       | Dimensions                 |
|--------------|---------------------|-----------------|----------------------------|----------------------------|
| ZN-34002-SST | Leonis Wall Lantern | Stainless Steel | 1 x 10W max LED<br>E27 GLS | H:220mm W:127mm Proj:190mm |
| ZN-34003-BLK |                     | Black           |                            |                            |



IP44

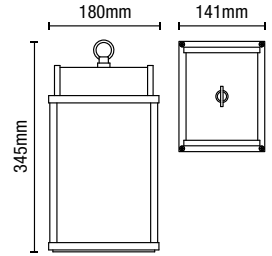

- Die-cast aluminium construction
- Frosted glass
- Hook feature


## CHARLOTTE

Frame Wall Lantern



| Code         | Description                  | Finish | Lamp                    | Dimensions                 |
|--------------|------------------------------|--------|-------------------------|----------------------------|
| ZN-38603-BLK | Charlotte Frame Wall Lantern | Black  | 1 x 10W max LED E27 GLS | Proj:141mm W:180mm H:345mm |

IP44

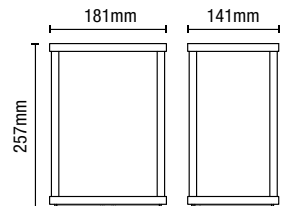

- Die-cast aluminium construction
- Contemporary styling
- Water glass effect


## KEB

Wall Lantern



| Code         | Description      | Finish | Lamp                    | Dimensions                 |
|--------------|------------------|--------|-------------------------|----------------------------|
| ZN-32069-BLK | Keb Wall Lantern | Black  | 1 x 10W max LED E27 GLS | Proj:141mm W:181mm H:257mm |

IP44

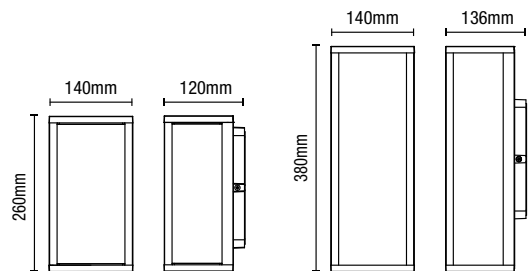

- Die-cast aluminium construction
- Contemporary styling

# CHINON

## Panel Light Box Lantern


  
 IP44 Rated


  
 Class 1


| Code         | Description                  | Finish | Weight | Lamp                    | Dimensions                 |
|--------------|------------------------------|--------|--------|-------------------------|----------------------------|
| ZN-38640-BLK | Chinon Panel Box Lantern     | Black  | 1.45kg | 1 x 10W max LED E27 GLS | Proj:140mm W:140mm H:260mm |
| ZN-38641-BLK | Chinon Panel 2LT Box Lantern | Black  | 2.05kg | 2 x 10W max LED E27 GLS | Proj:136mm W:140mm H:380mm |

1200  
Lumens

IP44



- Stainless steel construction
- PVC opal cover
- 13.5W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 45

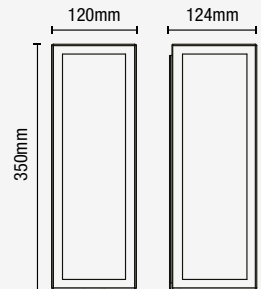

## THETIS

Box Lantern




| Code         | Finish | Description        | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                    |
|--------------|--------|--------------------|-----------|------------|-----------------|-------------------------------|
| ZN-38354-BLK | Black  | Thetis Box Lantern | 13.5W     | 4000k      | 600             | H:350mm W:120mm<br>Proj:124mm |
| ZN-38354-SIL | Silver |                    |           |            |                 |                               |

IP44



- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes

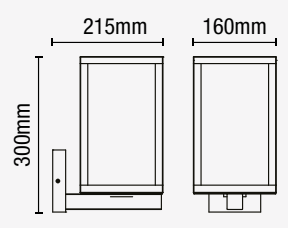


# HESTIA

Glass Panel Box Lantern

IP44 Rated | Class 1 | 2.3kg

| Code          | Description                    | Finish     | Lamp                    | Dimensions                 |
|---------------|--------------------------------|------------|-------------------------|----------------------------|
| ZN-38205-BLK  |                                | Black      |                         |                            |
| ZN-38205-SIL  | Hestia Glass Panel Box Lantern | Silver     | 1 x 10W max LED E27 GLS | W:160mm H:300mm Proj:215mm |
| ZN-38205-ANTH |                                | Anthracite |                         |                            |

IP44

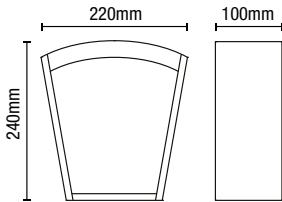

- Stainless steel construction
- Contemporary box lantern
- Available in 2 finishes

## ARTEMIS

Box Lantern



IP44  
Rated




Class 1



1.75kg

| Code         | Description | Finish          | Lamp        | Dimensions         |
|--------------|-------------|-----------------|-------------|--------------------|
| ZN-20945-BLK | Artemis     | Black           | 1 x 10W max | Proj:100mm W:220mm |
| ZN-20945-SST | Box Lantern | Stainless Steel | LED E27 GLS | H:240mm            |

IP44

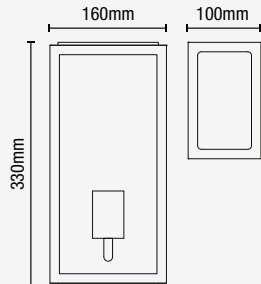

- Stainless steel construction
- Contemporary box lantern
- Available in 3 finishes

# MINERVA


## Box Lantern

 IP44 Rated |  Class 1 |  1.7kg

| Code          | Description         | Finish     | Lamp                       | Dimensions                    |
|---------------|---------------------|------------|----------------------------|-------------------------------|
| ZN-20944-BLK  | Minerva Box Lantern | Black      | 1 x 10W max<br>LED E27 GLS | W:160mm H:330mm<br>Proj:100mm |
| ZN-20944-SIL  |                     | Silver     |                            |                               |
| ZN_20944-ANTH |                     | Anthracite |                            |                               |

NEW

IP44

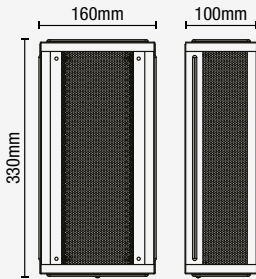

- Contemporary box lantern
- Available in 3 finishes
- Mesh insert design


## CUBA

Box Lantern with Mesh Insert



| Code          | Description                          | Finish                   | Lamp                    | Dimensions                    |
|---------------|--------------------------------------|--------------------------|-------------------------|-------------------------------|
| ZN-40002-ANTH | Minerva Box Lantern with Mesh Insert | Anthracite/Silver Insert | 1 x 10W max LED E27 GLS | W:160mm H:330mm<br>Proj:100mm |
| ZN-40002-BLK  |                                      | Black/Brass Insert       |                         |                               |
| ZN-40002-SIL  |                                      | Silver/Black Insert      |                         |                               |



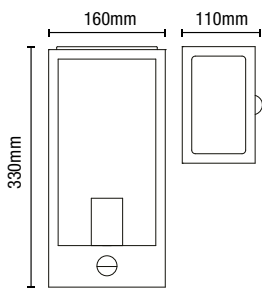

- Contemporary box lantern
- PIR Sensor
- 3-2000 LUX (adjustable)



IP44




## MINERVA

Box Lantern with PIR Sensor



| Code          | Description         | Finish     | Lamp                    | Dimensions                 |
|---------------|---------------------|------------|-------------------------|----------------------------|
| ZN-32070-BLK  | Minerva Box Lantern | Black      | 1 x 10W max LED E27 GLS | Proj:110mm W:160mm H:330mm |
| ZN-32070-ANTH | Minerva Box Lantern | Anthracite | 1 x 10W max LED E27 GLS | Proj:110mm W:160mm H:330mm |

IP44

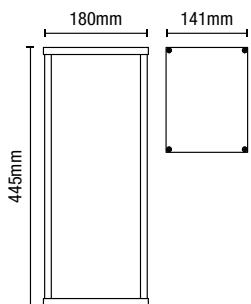

- Stainless steel construction
- Contemporary wall lantern
- Ribbed glass effect



## MEMPHIS

Wall Lantern



IP44  
Rated



Class 1



1.75kg


| Code         | Description          | Finish | Lamp                    | Dimensions                 |
|--------------|----------------------|--------|-------------------------|----------------------------|
| ZN-38602-BLK | Memphis Wall Lantern | Black  | 1 x 10W max LED E27 GLS | Proj:141mm W:180mm H:445mm |



**1000  
Lumens**



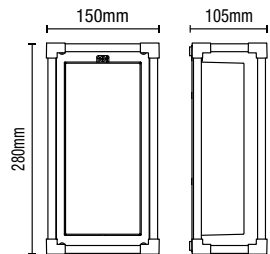

**IP54**

- Die-cast aluminium construction
- Opal polycarbonate diffuser
- 18W LED module (SMD)
- K: 4000
- Lm: 1000
- Lm/W: 55



## PESSAC

Frame LED Wall Light


| Code         | Finish | Description             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|--------------|--------|-------------------------|-----------|------------|-----------------|----------------------------|
| ZN-38620-BLK | Black  | Pessac Frame Wall Light | 18W       | 4000k      | 1000            | H:280mm W:150mm Proj:105mm |



IP44



- Die-cast aluminium construction
- Clear polycarbonate diffuser
- Traditional styling

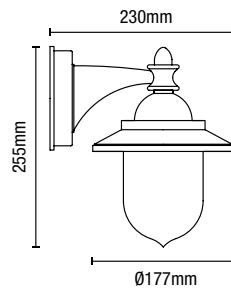

# LEEK

## Mini Fisherman's Lantern



Class 1



0.75kg



Available in  
3 colour options

| Code          | Description                   | Finish     | Lamp                    | Dimensions                 |
|---------------|-------------------------------|------------|-------------------------|----------------------------|
| ZN-31757-ANTH | Leek Mini Fisherman's Lantern | Anthracite | 1 x 10W max LED E27 GLS | Proj:230mm W:177mm H:255mm |
| ZN-31757-PBLU |                               | Pale Blue  |                         |                            |
| ZN-31757-MNT  |                               | Mint       |                         |                            |





IP44



ZN-20957-PBLU



ZN-20957-MNT



ZN-20957-DOVG




ZN-20957-IVO



ZN-20957-BLK

- Die-cast aluminium construction
- Traditional styling

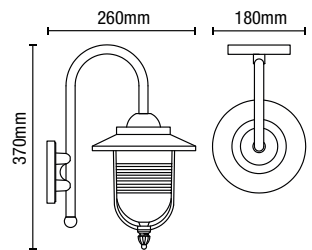

# ERIS

## Fisherman's Lantern



Available in 5 colour options

| Code          | Description              | Finish    | Lamp                    | Dimensions                 |
|---------------|--------------------------|-----------|-------------------------|----------------------------|
| ZN-20957-BLK  | Eris Fisherman's Lantern | Black     | 1 x 10W max LED E27 GLS | Proj:260mm W:180mm H:370mm |
| ZN-20957-PBLU |                          | Pale Blue |                         |                            |
| ZN-20957-MNT  |                          | Mint      |                         |                            |
| ZN-20957-DOVG |                          | Dove Grey |                         |                            |
| ZN-20957-IVO  |                          | Ivory     |                         |                            |



IP44



ZN-31809-PBLU



ZN-31808-POLSST




ZN-31809-IVO



ZN-31809-SST

- Contemporary styling
- Available in 4 different finishes

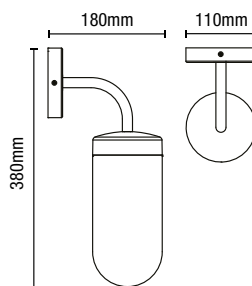

## KEW Wall Lantern



IP44  
Rated



Class 1



0.91kg



Available in  
4 colour options

| Code            | Description            | Finish          | Lamp                       | Dimensions                    |
|-----------------|------------------------|-----------------|----------------------------|-------------------------------|
| ZN-31808-POLSST | Kew<br>Wall<br>Lantern | Polished Steel  | 1 x 10W max<br>LED E27 GLS | Proj:180mm W:110mm<br>H:380mm |
| ZN-31809-SST    |                        | Stainless Steel |                            |                               |
| ZN-31809-PBLU   |                        | Pale Blue       |                            |                               |
| ZN-31809-IVO    |                        | Ivory           |                            |                               |

IP23



ZN-20955-PBLU



ZN-20955-MNT



ZN-20955-DOVG




ZN-20955-IVO



ZN-20955-BLK

- Die-cast aluminium construction with glass panels
- Traditional styling

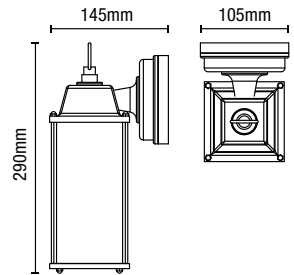

## CERES Wall Lantern



IP23  
Rated



Class 1




0.98kg



Available in  
5 colour options

| Code          | Description              | Finish    | Lamp                       | Dimensions                    |
|---------------|--------------------------|-----------|----------------------------|-------------------------------|
| ZN-20955-BLK  | Ceres<br>Wall<br>Lantern | Black     | 1 x 10W max<br>LED E27 GLS | Proj:145mm W:105mm<br>H:290mm |
| ZN-20955-PBLU |                          | Pale Blue |                            |                               |
| ZN-20955-MNT  |                          | Mint      |                            |                               |
| ZN-20955-DOVG |                          | Dove Grey |                            |                               |
| ZN-20955-IVO  |                          | Ivory     |                            |                               |

IP44

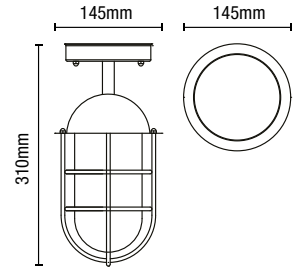


- Vintage styling
- Stainless steel finish

## KARI Porch Lantern



| Code         | Description        | Lamp                    | Dimensions        |
|--------------|--------------------|-------------------------|-------------------|
| ZN-24507-SST | Kari Porch Lantern | 1 x 10W max LED E27 GLS | H:310mm Dia:145mm |

IP44

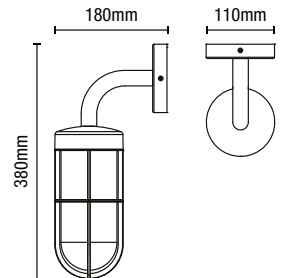

- Vintage styling
- Black satin finish


## WOKING Wall Lantern



| Code          | Description         | Lamp                    | Dimensions                 |
|---------------|---------------------|-------------------------|----------------------------|
| ZN-31807-TBLK | Woking Wall Lantern | 1 x 10W max LED E27 GLS | Proj:180mm W:110mm H:380mm |



IP44

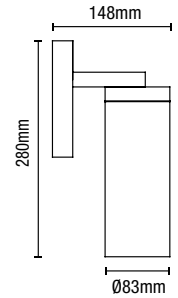

- Stainless steel construction
- Polycarbonate diffuser

## CARNAC


Up or Down Wall Lantern



| Code         | Description         | Finish | Lamp                    | Dimensions                |
|--------------|---------------------|--------|-------------------------|---------------------------|
| ZN-38630-BLK | Carnac Wall Lantern | Black  | 1 x 10W max LED E27 GLS | Proj:148mm W:83mm H:280mm |



IP44

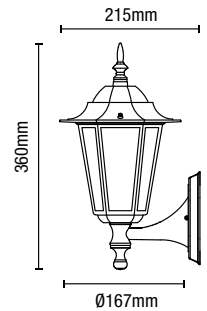

- Traditional style outdoor lantern
- Die-Cast Aluminium/Glass
- PIR sensor option available
- 2 colour options

Without PIR

## LIBOURNE

6 Panel Wall Lantern




| Code         | Description                           | Finish | Lamp                    | Dimensions                 |
|--------------|---------------------------------------|--------|-------------------------|----------------------------|
| ZN-38605-BLK | Libourne Wall Lantern                 | Black  | 1 x 10W max LED E27 GLS | Proj:215mm W:167mm H:360mm |
| ZN-38605-WHT |                                       | White  |                         |                            |
| ZN-38606-BLK | Libourne Wall Lantern with PIR sensor | Black  |                         |                            |
| ZN-38606-WHT |                                       | White  |                         |                            |

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish



## PERDITA

Half Lantern




| Code         | Description          | Lamp                    | Dimensions                 |
|--------------|----------------------|-------------------------|----------------------------|
| ZN-25464-BLK | Perdita Half Lantern | 1 x 10W max LED E27 GLS | Proj:129mm W:179mm H:196mm |

IP44



- Die-cast aluminium and polycarbonate construction
- IP44 rated
- Vintage style lantern
- Black satin finish

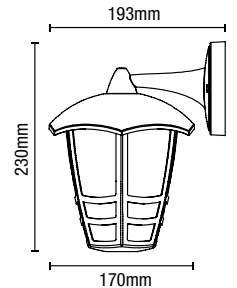


## PERDITA

Curved Wall Lantern



| Code         | Description                 | Lamp                    | Dimensions                 |
|--------------|-----------------------------|-------------------------|----------------------------|
| ZN-25463-BLK | Perdita Curved Wall Lantern | 1 x 10W max LED E27 GLS | Proj:193mm W:170mm H:230mm |

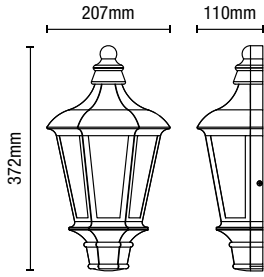

IP44




- IP44 rated
- Die-cast aluminium construction
- Traditional styled half lantern
- Available with or without photocell sensor

## PERSEI Half Lantern



| Code         | Sensor    | Description         | Lamp                       | Dimensions                 |
|--------------|-----------|---------------------|----------------------------|----------------------------|
| ZN-33994-BLK | -         | Persei Half Lantern | 1 x 10W max LED<br>E27 GLS | H:372mm W:207mm Proj:110mm |
| ZN-33995-BLK | Photocell |                     |                            |                            |

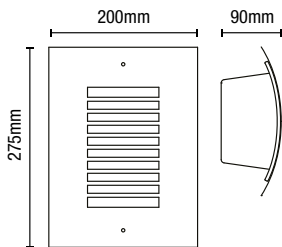

IP44




- IP44 rated
- Stainless steel construction
- Available in 2 finishes
- Available with or without PIR sensor

## SIGMA Slatted Wall Lantern



| Code         | Finish          | Sensor | Description                   | Lamp                       | Dimensions                   |
|--------------|-----------------|--------|-------------------------------|----------------------------|------------------------------|
| ZN-25340-SST | Stainless Steel | -      | Sigma Slatted<br>Wall Lantern | 1 x 10W max LED<br>E27 GLS | H:275mm W:200mm<br>Proj:90mm |
| ZN-28708-SST | Stainless Steel | PIR    |                               |                            |                              |
| ZN-28708-BLK | Black           | PIR    |                               |                            |                              |

**NEW****IP44**

- Aluminium & polycarbonate construction
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



## GAMMA

Wall Light



IP44  
Rated




Class 1



0.53kg

| Code          | Description      | Finish     | Lamp                       | Dimensions                    |
|---------------|------------------|------------|----------------------------|-------------------------------|
| ZN-39171-ANTH | Gamma Wall Light | Anthracite | 1 x 10W max<br>LED E27 GLS | W:105mm H:205mm<br>Proj:160mm |
| ZN-39171-BLK  |                  | Black      |                            |                               |

**NEW****IP44**

- Aluminium & polycarbonate construction
- Photocell Sensor
- Matching bollard light available
- Available in 2 finishes
- Compatible with most E27 lamps



## GAMMA

Wall Light with Photocell Sensor



IP44  
Rated



Photocell  
Sensor



Class 1




0.53kg

| Code          | Description                               | Finish     | Lamp                       | Dimensions                    |
|---------------|---|------------|----------------------------|-------------------------------|
| ZN-39172-ANTH | Gamma Wall Light<br>with Photocell Sensor | Anthracite | 1 x 10W max<br>LED E27 GLS | W:105mm H:205mm<br>Proj:160mm |
| ZN-39172-BLK  |   | Black      |                            |                               |



NEW

IP44

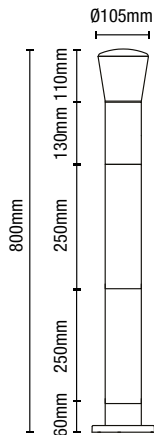


- Aluminium & polycarbonate construction
- Matching wall light available
- Available in black & anthracite
- Compatible with most E27 lamps
- Supplied with 3 ground bolts and fixings
- Three height options: 300mm/550mm/800mm

# GAMMA

Post Light



| Code          | Description      | Finish     | Lamp                    | Dimensions        |
|---------------|------------------|------------|-------------------------|-------------------|
| ZN-39173-ANTH | Gamma Post Light | Anthracite | 1 x 10W max LED E27 GLS | H:800mm Dia:105mm |
| ZN-39173-BLK  |                  | Black      |                         |                   |

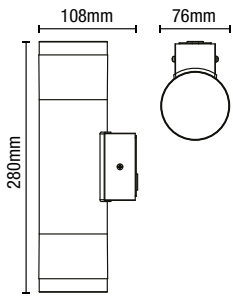

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 2 x 4W LED module (SMD)
- Lm/W: 100
- 30,000 hours lifetime




**NEW**


**400 Lumens**

**IP44**

## POLLUX Wall Light



| Code         | Finish          | Description               | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                |
|--------------|-----------------|---------------------------|-----------|------------|-----------------|---------------------------|
| ZN-39998-BLK | Black           | Pollux Up/Down Wall Light | 8W        | 3000k      | 400             | H:280mm W:76mm Proj:108mm |
| ZN-39998-SST | Stainless Steel |                           |           |            |                 |                           |

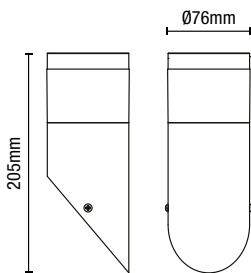


- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50




**200 Lumens**

**IP44**

## POLLUX Angled Wall Light



| Code         | Finish          | Description              | Power (w) | Colour (k) | Total Flux (lm) | Dimensions       |
|--------------|-----------------|--------------------------|-----------|------------|-----------------|------------------|
| ZN-38615-BLK | Black           | Pollux Angled Wall Light | 4W        | 3000k      | 200             | Dia:76mm H:205mm |
| ZN-38615-SST | Stainless Steel |                          |           |            |                 |                  |

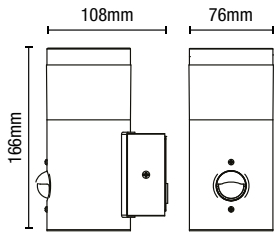

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50
- PIR sensor



200 Lumens

IP44



## POLLUX

Wall Light with PIR Sensor



IP44 Rated



3000K WW



PIR Sensor




Class 1



0.35kg

| Code         | Finish          | Description                       | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                |
|--------------|-----------------|-----------------------------------|-----------|------------|-----------------|---------------------------|
| ZN-38616-BLK | Black           | Pollux Wall Light with PIR Sensor | 4W        | 3000k      | 200             | H:166mm W:76mm Proj:108mm |
| ZN-38616-SST | Stainless Steel |                                   |           |            |                 |                           |

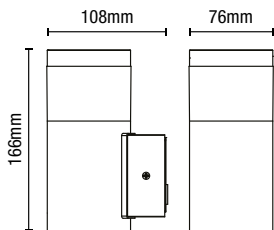

- Stainless steel and polycarbonate construction
- Matching bollard light available
- 4W LED module (SMD)
- Lm/W: 50



200 Lumens

IP44

## POLLUX

Wall Light



IP44 Rated



3000K WW



Class 1




0.35kg

| Code         | Finish          | Description       | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                |
|--------------|-----------------|-------------------|-----------|------------|-----------------|---------------------------|
| ZN-38614-BLK | Black           | Pollux Wall Light | 4W        | 3000k      | 200             | H:166mm W:76mm Proj:108mm |
| ZN-38614-SST | Stainless Steel |                   |           |            |                 |                           |



200  
Lumens

IP44

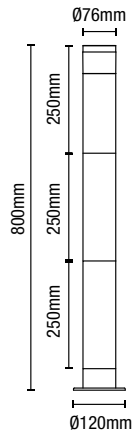

- Stainless steel construction
- Floor mounted
- Other matching items available
- Available in 2 finishes
- 3 variable heights - 300 / 550 / 800mm
- 4W LED module (SMD)
- K: 3000
- Lm: 200
- Lm/W: 50

## POLLUX


LED Post Light

IP44 Rated | 3000K WW | Class 1 | 1.06kg


| Code         | Finish          | Description           | Power (w) | Colour (k) | Total Flux (lm) | Dimensions        |
|--------------|-----------------|-----------------------|-----------|------------|-----------------|-------------------|
| ZN-33394-BLK | Black           | Pollux LED Post Light | 4W LED    | 3000K      | 200             | H:800mm Dia:120mm |
| ZN-33394-SST | Stainless Steel |                       |           |            |                 |                   |

**NEW**  
FOR  
2023

**IP44**

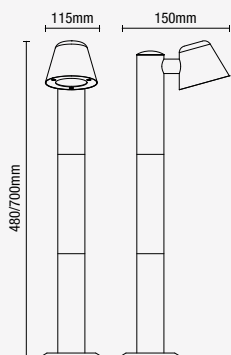

- Durable stainless steel construction
- Textured black finish
- Post light has variable heights of - 480/700mm

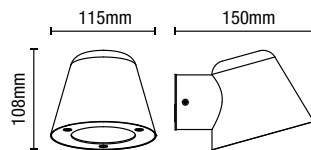


## IVES

Post Light | Wall Light



| Code         | Description     | Finish | Lamp                   | Dimensions              | Weight |
|--------------|-----------------|--------|------------------------|-------------------------|--------|
| ZN-42097-BLK | Ives Wall Light | Black  | 1 x 7W max<br>LED GU10 | L:150mm W:115mm H:108mm | 0.4kg  |
| ZN-42098-BLK | Ives Post Light | Black  |                        | L:240mm W:128mm H:700mm | 1.14kg |

IP67

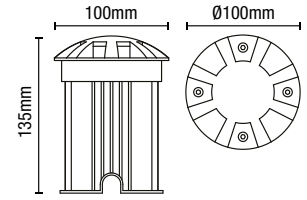


- Die-cast aluminium with glass lens
- robust construction
- Min void: 115mm
- Cable length: 300mm

## PAN Ground Light




| Code         | Description      | Finish | Lamp                | Dimensions           | Cutout   |
|--------------|------------------|--------|---------------------|----------------------|----------|
| ZN-29184-BLK | Pan Ground Light | Black  | 1 x 7W max LED GU10 | Dia:100mm<br>H:135mm | Dia:87mm |

IP67

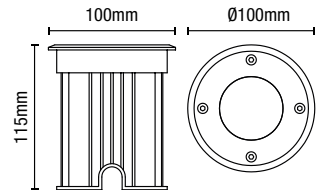


- Stainless steel with glass lens
- robust construction
- Min void: 115mm
- Cable length: 300mm

## PAN Ground Light



| Code         | Description      | Finish          | Lamp                | Dimensions           | Cutout   |
|--------------|------------------|-----------------|---------------------|----------------------|----------|
| ZN-20965-SST | Pan Ground Light | Stainless Steel | 1 x 7W max LED GU10 | Dia:100mm<br>H:115mm | Dia:87mm |
| ZN-20965-BLK | Pan Ground Light | Black           | 1 x 7W max LED GU10 | Dia:100mm<br>H:115mm | Dia:87mm |






**160 Lumens**

**IP67**


- Die-cast aluminium
- 4W LED module (SMD)
- K: 4000
- Lm: 160
- Lm/W: 40

## SCOUT

### Surface Mount Ground Light



| Code         | Finish | Description                      | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions           |
|--------------|--------|----------------------------------|-----------|------------|-----------------|-------------------|----------------------|
| ZN-29997-BLK | Black  | Scout Surface Mount Ground Light | 4W        | 4000k      | 100             | 40                | Dia:210<br>Proj:54mm |




**100 Lumens**

**IP67**

- Die-cast aluminium
- 3W LED module (SMD)
- K: 4000
- Lm: 100
- Lm/W: 33

## SCOUT

### Surface Mount Ground Light



| Code         | Finish | Description                              | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|--------------|--------|--|-----------|------------|-----------------|-------------------|------------------------|
| ZN-35738-BLK | Black  | Scout Surface Mount Ground Light - 150mm | 3W        | 4000k      | 100             | 33                | Dia:150mm<br>Proj:53mm |




**NEW**  
FOR  
2023

**250**  
Lumens  
Per Lamp


**IP65**

- Plug and play 24V garden deck light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adapter requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available

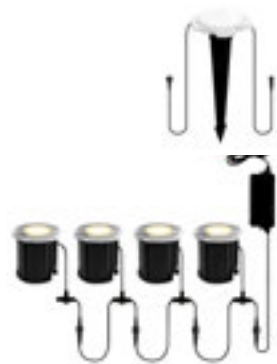

## LAPIN

### Recessed Deck Light Kit



| Code     | Description                            | Cable Length | Power (w) | Colour (k) | Total Flux (lm) | Dimensions            | Weight (kg) |
|----------|--|--------------|-----------|------------|-----------------|-----------------------|-------------|
| ZN-41736 | Lapin Recessed Deck 4 Light Kit        | 13.2m        | 4 x 3W    | 4000k      | 250lm per lamp  | Dia. 41.5mm<br>H:47mm | 0.86kg      |
| ZN-41737 | Lapin Recessed Deck Add-on 2 Light Kit | 4m           | 2 x 3W    | 4000k      |                 | Dia. 41.5mm<br>H:49mm | 0.278kg     |
| ZN-41739 | Lapin Add-on Photocell Sensor          | 0.4m         | -         | -          | -               | Dia: 52mm<br>H:       | 0.048kg     |
| ZN-41738 | Lapin Add-on Extension Cable           | 5m           | -         | -          | -               | L:5000mm              | 0.102kg     |



**NEW**  
FOR  
2023

**240**  
Lumens  
Per Lamp

**IP65**

**PLUG  
+  
PLAY**

- Plug and play 24V garden spike light kit with add-ons available
- Lamps can be deck mounted or come with a ground spike
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adaptor requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



## LAPIN

### Garden Spike Light Kit

  
IP65  
Rated

  
Class 3

| Code     | Description                           | Cable Length | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           | Weight (kg) |
|----------|---------------------------------------|--------------|-----------|------------|-----------------|----------------------|-------------|
| ZN-41732 | Lapin Garden Spike 4 Light Kit        | 13.2m        | 4 x 3W    | 4000k      | 240lm per lamp  | Dia. 60mm<br>H:150mm | 0.93kg      |
| ZN-41733 | Lapin Garden Spike Add-on 2 Light Kit | 4m           | 2 x 3W    | 4000k      |                 | Dia. 60mm<br>H:150mm | 0.34kg      |
| ZN-41739 | Lapin Add-on Photocell Sensor         | 0.4m         | -         | -          | -               | Dia: 52mm<br>H:      | 0.048kg     |
| ZN-41738 | Lapin Add-on Extension Cable          | 5m           | -         | -          | -               | L:5000mm             | 0.102kg     |



**NEW**  
FOR  
2023

**250**  
Lumens  
Per Lamp

**IP65**

**PLUG  
+  
PLAY**

- Plug and play 24V garden pathway light kit with add-ons available
- Add extra spikes to the circuit for added coverage - upto 8 spikes max
- 2m spacing between spikes as standard
- 6.2m between plug and first head
- Tough H05RN-F rubber cable
- IP65 rated (adaptor rated to IP20)
- Plug adaptor requires IPX5 minimum housing if plugged in externally
- Add on photocell sensor available for auto on/off function at dusk/dawn
- 5m extension cable available



## LAPIN

### Pathway Light Kit



| Code     | Description                      | Cable Length | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           | Weight (kg) |
|----------|----------------------------------|--------------|-----------|------------|-----------------|----------------------|-------------|
| ZN-41734 | Lapin Pathway 4 Light Kit        | 13.2m        | 4 x 3W    | 4000k      | 250lm per lamp  | Dia. 35mm<br>H:230mm | 0.70kg      |
| ZN-41735 | Lapin Pathway Add-on 2 Light Kit | 4m           | 2 x 3W    | 4000k      |                 | Dia. 35mm<br>H:230mm | 0.34kg      |
| ZN-41739 | Lapin Add-on Photocell Sensor    | 0.4m         | -         | -          | -               | Dia: 52mm<br>H:      | 0.048kg     |
| ZN-41738 | Lapin Add-on Extension Cable     | 5m           | -         | -          | -               | L:5000mm             | 0.102kg     |





**NEW**

**IP44**

**PLUG  
+  
PLAY**



- Plug and play - no driver required
- Rubber H05RN-F 2 x 1.0mm<sup>2</sup> Cable
- Lamps not included
- 11.4m total length
- 5m from plug to first lampholder
- 48cm spacing between each head
- Connect multiple festoon lights together
- Suitable bulbs are shown on P.352



Loop multiple festoons together with weatherproof connectors

## HARDY

20 x E27 Lampholder Festoon



IP44  
Rated



11.4M  
Cable



Class 2

| Code     | Description                       | Finish       | Lamp                     | Dimensions    |
|----------|-----------------------------------|--------------|--------------------------|---------------|
| ZN-41106 | Hardy 20 x E27 Lampholder Festoon | Black Rubber | 20 x 10W max LED E27 GLS | Length: 11.4m |

# PLUG + SOCKET

Cable Connectors

NEW

IP68



| Code     | Description   | Size                      |
|----------|---|---------------------------|
| ZN-41157 | 32A, 3 Pole, IP68 Cable Connector (1 x fast-fit connector)          | H:30mm x L:95mm x D:30mm  |
| ZN-41158 | 16A, 3 Pole, IP68 T 3-Way Cable Connector (3 x fast-fit connectors) | H:30mm x L:150mm x D:30mm |




20 Lumens

IP65

NO DRIVER REQ.

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 1m cable included
- 0.5W LED module (SMD)
- Lm: 20



# OHIO

Circular Decking Light



IP65 Rated



35mm Cut-out



1M Cable



Class 2



0.13kg

| Code         | Description                      | Lamp     | Kelvin | Lumen | Dimensions |
|--------------|----------------------------------|----------|--------|-------|------------|
| CUL-26465-WW | Ohio Circular 240V Decking Light | 0.5W LED | 3000   | 20    | Dia:40mm   |
| CUL-26465-CW | Ohio Circular 240V Decking Light | 0.5W LED | 6000   | 20    | Dia:40mm   |




**NEW**

**80 Lumens**

**IP65**



- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 in-line transformer with 5m cable
- Easy to install
- Available in cool and warm white

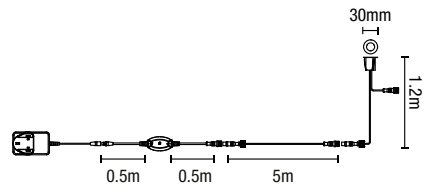

# AUBIN

Deck light kit





| Code     | Finish          | Description          | Power (w) | Colour (k) | Total Flux (lm) | Dimensions              |
|----------|-----------------|----------------------|-----------|------------|-----------------|-------------------------|
| ZN-40063 | Stainless Steel | Aubin Deck Light Kit | 10x 0.5W  | 3000k      | 80              | Dia:30mm<br>Proj:1200mm |
| ZN-40064 |                 |                      |           | 6500k      |                 |                         |






RGB



RGBW

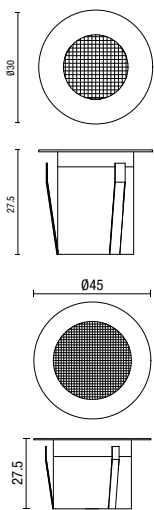


**NEW**

**200 Lumens**

**IP65**



- [304] Stainless steel construction
- 1.2m cable between each head
- 10 x 0.5W LED module (SMD)
- 1 x 12V IP20 inline transformer with 5m cable
- Easy to install
- Smart wi-fi capability

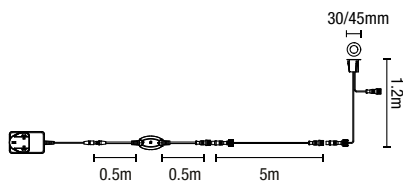

## BARU RGB Deck light kit



| Code     | Finish          | Description         | Power (w) | Colour | Total Flux (lm) | Dimensions              |
|----------|-----------------|---------------------|-----------|--------|-----------------|-------------------------|
| ZN-40065 | Stainless Steel | Baru Deck Light Kit | 10x 0.5W  | RGB    | 55              | Dia:30mm<br>Proj:1200mm |


## BARU RGBW Deck light kit



| Code     | Finish          | Description         | Power (w) | Colour | Total Flux (lm) | Dimensions              |
|----------|-----------------|---------------------|-----------|--------|-----------------|-------------------------|
| ZN-40066 | Stainless Steel | Baru Deck Light Kit | 10x 0.5W  | RGBW   | 200             | Dia:45mm<br>Proj:1200mm |

**390**  
Lumens

**IP54**

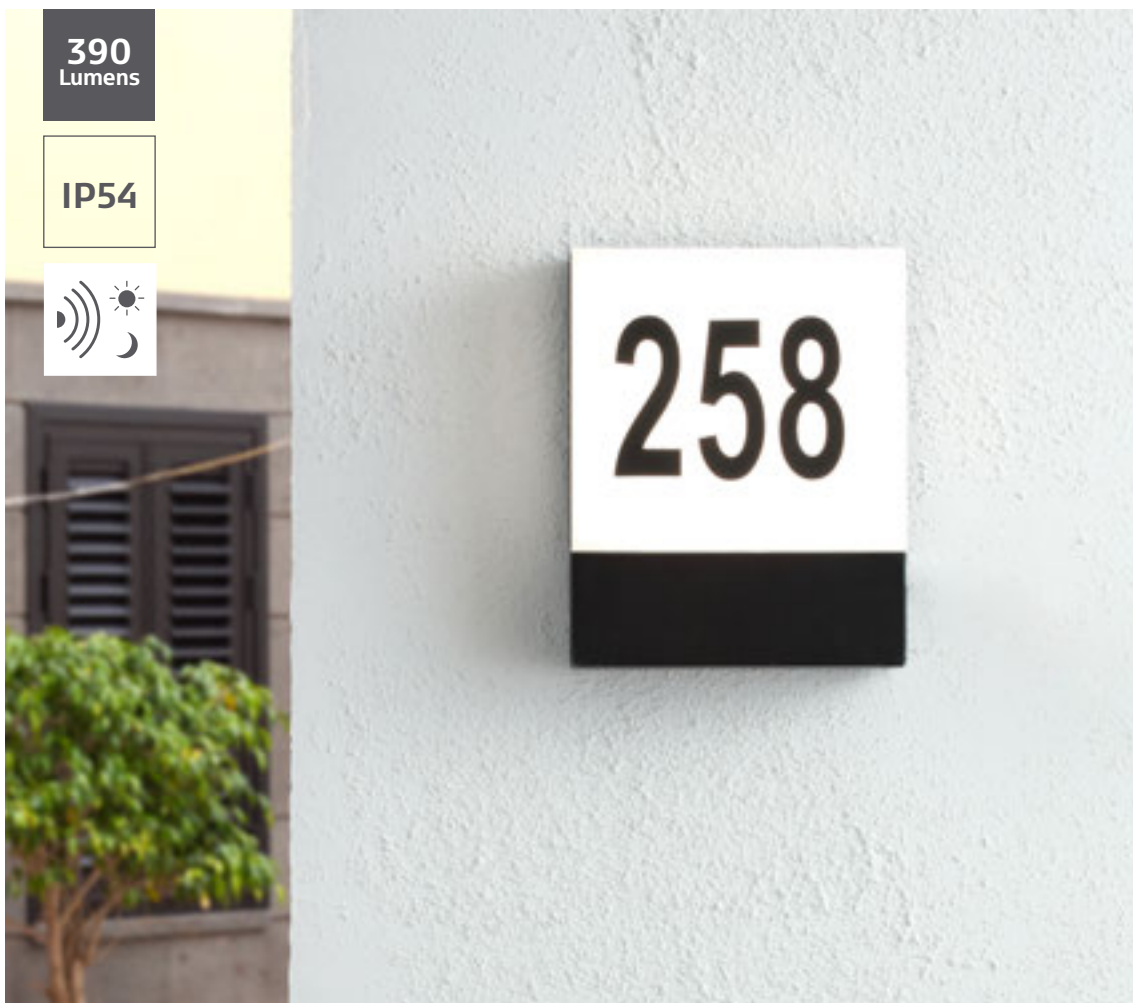

- Includes full number/letter set
- 6W LED module (SMD)
- K: 4000
- Lm: 390
- Lm/W: 65
- Hours: 30,000
- Dusk/Dawn photocell sensor

## IOTA

LED Door Number



IP54  
Rated



4000K  
CW



Photocell  
Sensor



Class 1



0.8kg

| Code         | Description          | Finish | Lamp   | Lumen | Dimensions                |
|--------------|----------------------|--------|--------|-------|---------------------------|
| ZN-34044-BLK | Iota LED Door Number | Black  | 6W LED | 390   | H:200mm W:195mm Proj:36mm |



**1300**  
Lumens

**IP65**



- IK10 vandal resistant
- Polycarbonate construction
- 16W LED module (SMD)
- K: 3000
- Lm: 1300
- Lm/W: 81.25
- Hours: 20,000
- Automatically turns on/off at night with adjustable lux sensor <3-50 LUX

• Adhesive numbering option

## MESA

LED Door Number



| Code     | Finish     | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|----------|------------|----------------------|-----------|------------|-----------------|-------------------|---------------------------|
| ZN-35689 | Black/Opal | Mesa LED Door Number | 16W       | 3000k      | 1300            | 81.25             | H:195mm W:300mm Proj:70mm |

**750 Lumens** **IP65** 



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000

## LYNN PIR Security Spotlight

 IP65 Rated |  4000K CW |  PIR Sensor |  Class 2 |  0.35kg



| Code          | Finish    | Description                             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|-----------|---|-----------|------------|-----------------|----------------------------|
| ZN-35687-BLK  | Black     | Lynn Security Spotlight with PIR Sensor | 10W       | 4000k      | 750             | H:205mm W:127mm Proj:140mm |
| ZN-35687-DGRY | Dark Grey |   |           |            |                 |                            |
| ZN-35687-WHT  | White     |   |           |            |                 |                            |

**750 Lumens** **IP65**



- Polycarbonate construction
- 10W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000

## LYNN Security Spotlight

 IP65 Rated |  4000K CW |  Class 2 |  0.3kg

| Code          | Finish    | Description             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|-----------|-------------------------|-----------|------------|-----------------|----------------------------|
| ZN-38627-BLK  | Black     | Lynn Security Spotlight | 10W       | 4000k      | 750             | H:127mm W:127mm Proj:160mm |
| ZN-38627-DGRY | Dark Grey |                         |           |            |                 |                            |
| ZN-38627-WHT  | White     |                         |           |            |                 |                            |



IP65

1500 Lumens



- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- 20W LED module (SMD)
- Lm/W: 75
- Hrs: 20,000



## LYNN PIR Twin Security Spotlight



| Code          | Finish    | Description                                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|-----------|--|-----------|------------|-----------------|----------------------------|
| ZN-35688-BLK  | Black     | Lynn Security Twin Spotlight with PIR Sensor | 20W       | 4000k      | 1500            | H:205mm W:305mm Proj:135mm |
| ZN-35688-DGRY | Dark Grey |  |           |            |                 |                            |
| ZN-35688-WHT  | White     |  |           |            |                 |                            |



1500 Lumens

IP65


- Polycarbonate construction
- 20W LED module (SMD)
- K: 4000
- Lm: 1500
- Lm/W: 75
- Hrs: 20,000



## LYNN Twin Security Spotlight



| Code          | Finish    | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|-----------|------------------------------|-----------|------------|-----------------|----------------------------|
| ZN-38628-BLK  | Black     | Lynn Security Twin Spotlight | 20W       | 4000k      | 1500            | H:127mm W:179mm Proj:145mm |
| ZN-38628-DGRY | Dark Grey |                              |           |            |                 |                            |
| ZN-38628-WHT  | White     |                              |           |            |                 |                            |

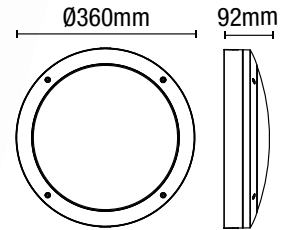
**NEW****1700  
Lumens****IP65**

- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime

## ROSA Bulkhead



| Code         | Finish | Description         | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|--------------|--------|---------------------|-----------|------------|-----------------|-------------------|------------------------|
| ZN-39742-BLK | Black  | Rosa Round Bulkhead | 20W       | CCT        | 1700            | 85                | Dia:360mm<br>Proj:92mm |

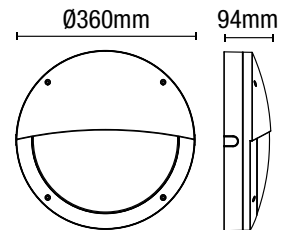**NEW****1700  
Lumens****IP65**

- Die-cast aluminium with polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 20W LED module (SMD)
- 50,000 hours lifetime


## GIGI Eyelid Bulkhead



| Code         | Finish | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|--------------|--------|----------------------|-----------|------------|-----------------|-------------------|------------------------|
| ZN-39746-BLK | Black  | Gigi Eyelid Bulkhead | 20W       | CCT        | 1700            | 85                | Dia:360mm<br>Proj:94mm |

480  
Lumens

IP44

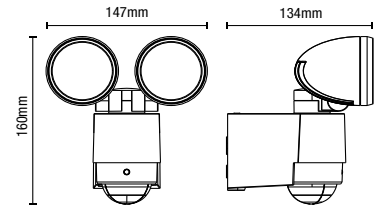

- Polycarbonate construction
- PIR sensor with adjustable LUX sensitivity and timer
- 5-12m Detection Distance
- Hrs: 20,000

## SIROCCO


### PIR Twin Security Spotlight



| Code         | Finish | Description                                     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|--------------|--------|---|-----------|------------|-----------------|-------------------|----------------------------|
| ZN-23454-BLK | Black  | Sirocco Security Twin Spotlight with PIR Sensor | 6W        | 6000k      | 480             | 80                | H:160mm W:147mm Proj:134mm |
| ZN-23454-WHT | White  |   |           |            |                 |                   |                            |

200  
Lumens

IP44

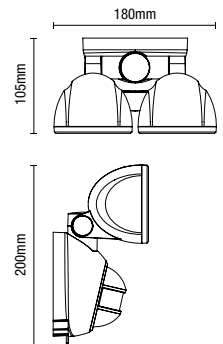

- Battery-operated for use on buildings without mains electricity supply
- Requires 4x AA batteries (not supplied)
- Concealed auto or off switch
- Adjustable swivel heads
- Up to 10m detection distance

## FELIS

### LED Battery Operated Twin Spotlight


| Code         | Description                           | Power (w) | Colour (k) | Total Flux (lm) | Batteries                  |
|--------------|---------------------------------------|-----------|------------|-----------------|----------------------------|
| ZN-30508-BLK | Felis Battery Operated Twin Spotlight | 2W LED    | 5000k      | 200             | 4 x 1.5V AA (not included) |



NEW

Upto  
22000  
Lumens

IP65

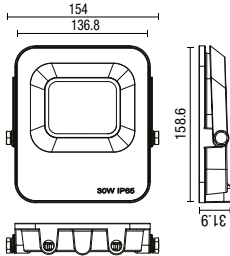

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

## REINA

### LED Slimline Floodlight



IP65  
Rated



180°  
Beam



6500K  
DW



0.5M  
Cable




Class 1

| Code         | Description                   | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|--------------|-------------------------------|-----------|-----------------|--------|---------------------------|
| ZN-38688-BLK | Reina LED Slimline Floodlight | 30W LED   | 3300            | 0.55kg | H:158mm W:154mm Proj:31mm |
| ZN-38689-BLK |                               | 50W LED   | 5500            | 0.78kg | H:193mm W:183mm Proj:32mm |
| ZN-38690-BLK |                               | 100W LED  | 11000           | 1.24kg | H:233mm W:218mm Proj:33mm |
| ZN-38691-BLK |                               | 150W LED  | 16500           | 1.8kg  | H:268mm W:248mm Proj:33mm |
| ZN-38692-BLK |                               | 200W LED  | 22000           | 2.3kg  | H:309mm W:285mm Proj:33mm |

NEW

Upto  
11000  
Lumens

IP65

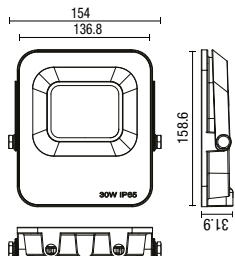

- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



## CLARA

LED Slimline Floodlight with PIR Sensor



PIR Sensor



IP65 Rated



180° Beam



6500K DW



0.5M Cable



Class 1

| Code         | Description                                   | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|--------------|---|-----------|-----------------|--------|---------------------------|
| ZN-38694-BLK | Clara LED Slimline Floodlight with PIR Sensor | 30W LED   | 3300            | 0.78kg | H:193mm W:183mm Proj:32mm |
| ZN-38695-BLK |   | 50W LED   | 5500            | 1.24kg | H:233mm W:218mm Proj:33mm |
| ZN-38696-BLK |   | 100W LED  | 11000           | 1.8kg  | H:268mm W:248mm Proj:33mm |

Upto  
**1400**  
Lumens

**IP54**




· Tripod supplied separately

- Tough aluminium construction
- Rotates 360° on base
- Non-slip carry handle
- 40,000 hours LED lifetime
- Fully charged in 4-5 hours
- Supplied with power adapter and in-car charger
- Extendable tripod available which extends up to 1.58m for use with both 10/20W models



· Power adapter and in-car charger

## RECHARGEABLE Worklight



| Description             | Code     | Power (w) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Charge Time (h) | Run Time (h) | Dimensions                 |
|-------------------------|----------|-----------|-----------------|-------------------|------------|-----------------|--------------|----------------------------|
| Rechargeable Work Light | ZN-31385 | 10W       | 700             | 70                | 6000k      | 4-5 Hours       | 4 Hours      | L:135mm W:120mm H:255mm    |
|                         | ZN-31386 | 20W       | 1400            | 70                |            |                 | 8 Hours      | L:160mm W:160mm H:300mm    |
| Heavy Duty Tripod       | ZN-31387 | -         | -               | -                 | -          | -               | -            | Dia:800mm W:500mm H:1580mm |



**3000  
Lumens**






**IP65**

- Durable rubber casing
- Heavy duty extendable tripod up to 1.6m
- 1.8m H07RN-F cable
- 2 x 20W LED module (SMD)
- K: 6000
- Lm: 3000
- Lm/W: 75
- Hrs: 20,000



## TWIN LED

Worklight with Tripod

|   |   |   |   |   |
|---|---|---|---|---|
|  |  |  |  |  |
| IP65<br>Rated   | 6000K<br>DW   | 1.8M<br>Cable   | Class 1   | 3.4kg   |

| Code     | Description                 | Voltage  | Lamp        | Lumen | Dimensions          |
|----------|-----------------------------|----------|-------------|-------|---------------------|
| ZN-34870 | Twin Work Light with Tripod | 220-240V | 2 x 20W LED | 3000  | Dia:1000mm H:1600mm |



# OUTDOOR HEATING

---

New extensive range of Zink radiant heaters perfect for outdoor settings.




IP34



- Single heat setting
- Aluminium cover, size: 420 x 420mm
- Heating element: Carbon tube
- Outdoor use only
- Pull-string switch control
- Tip over switch

## CORAL

Outdoor Pedestal Heater

 IP34  
 Rated
  9.5kg

| Code         | Description                   | Finish | Power (w) | Dimensions            |
|--------------|-------------------------------|--------|-----------|-----------------------|
| ZR-38155-SIL | Coral Outdoor Pedestal Heater | Silver | 1500      | H:1800mm<br>Dia:510mm |



## BLAZE

STAND FOR WALL  
MOUNT HEATERS



- Adjustable height


| Code         | Weight | Dimensions         |
|--------------|--------|--------------------|
| ZR-32302-BLK | 18.7kg | H:1700mm Dia:410mm |



IP44



- Pull ON/OFF switch
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP44 rating
- Outdoor use only
- Stand available separately (ZR-32302)

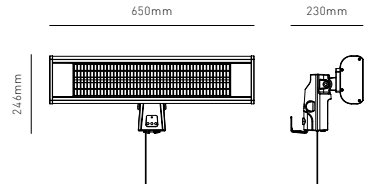

# BLAZE

Wall Mounted Patio Heater

IP44 Rated

2.4kg


| Code         | Description                     | Finish | Power (w) | Dimensions                 |
|--------------|---------------------------------|--------|-----------|----------------------------|
| ZR-32298-BLK | Blaze Wall Mounted Patio Heater | Black  | 1800      | H:246mm W:650mm Proj:230mm |



IP44



- Remote control operated
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP44 rating
- Outdoor use only
- 2 x 1W integrated LED lamps
- Stand available separately (ZR-32302)

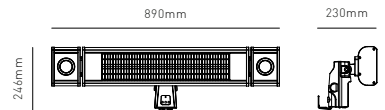

# BLAZE

Wall Mounted Patio Heater with LED Lights



| Code         | Description                                     | Finish | Power (w) | Dimensions                 |
|--------------|---|--------|-----------|----------------------------|
| ZR-32299-BLK | Blaze Wall Mounted Patio Heater with LED Lights | Black  | 1800      | H:246mm W:890mm Proj:230mm |






**3**  
HEAT  
SETTINGS

**IP24**



- Pull switch
- 3 variable heat settings
- Wall or stand mounted
- Tip over safety switch
- Heat coverage approx 12m<sup>2</sup>
- IP24 rating
- Outdoor use only
- Stand available separately (ZR-32302)

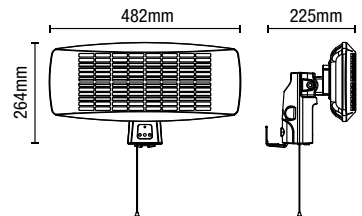

# BLAZE

Wall Mount Patio Heater Variable Watt

 3 Heat Settings |  IP24 Rated |  2.0kg

| Code         | Description                   | Finish | Power (w) | Dimensions                 |
|--------------|-------------------------------|--------|-----------|----------------------------|
| ZR-32297-BLK | Blaze Wall Mount Patio Heater | Black  | 2000      | H:264mm W:482mm Proj:225mm |



IP34



**Pendant Heater**

- ON/OFF switch
- Remote control operated
- Integrated LED light
- Heat coverage approx 20m<sup>2</sup>
- IP34 rating
- Outdoor use only

**Floor Standing Heater**

- Pull string switch
- 2 heat setting
- Tip over safety switch
- Heat coverage approx 20m<sup>2</sup>
- IPX4 rating
- Outdoor use only

**MARL**  
Outdoor Heaters



| Code         | Description                | Finish          | Power (w) | Dimensions         | Weight |
|--------------|----------------------------|-----------------|-----------|--------------------|--------|
| ZR-38532-SST | Marl Pendant Heater        | Stainless Steel | 2000      | H:290mm Dia:510mm  | 2.1kg  |
| ZR-38831-SST | Marl Floor Standing Heater | Stainless Steel | 2000      | H:2000mm Dia:500mm | 8.4kg  |




IP34



- Pull string switch
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only


## CORAL

Pendant Heater



| Code         | Description          | Finish          | Power (w) | Dimensions        |
|--------------|----------------------|-----------------|-----------|-------------------|
| ZR-38529-SST | Coral Pendant Heater | Stainless Steel | 1500      | H:240mm Dia:420mm |

IP34

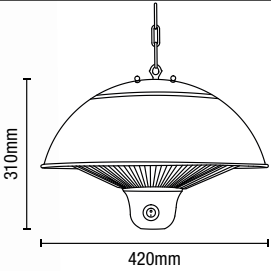

**Pendant Heater**

- Remote control operated
- Integrated LED light
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only

**Floor Standing Heater**

- Pull string switch
- Single heat setting
- Tip over safety switch
- Heat coverage approx 15m<sup>2</sup>
- IP34 rating
- Outdoor use only

**Onyx**  
Outdoor Heaters



| Code         | Description                | Finish | Power (w) | Dimensions         | Weight |
|--------------|----------------------------|--------|-----------|--------------------|--------|
| ZR-38833-BLK | Onyx Pendant Heater        | Black  | 1500      | H:2000mm Dia:500mm | 8.8kg  |
| ZR-38834-BLK | Onyx Floor Standing Heater | Black  | 1500      | H:420mm Dia:310mm  | 2.5kg  |

3  
HEAT  
SETTINGS



IP44



- Free standing or wall mounted
- 3 heat settings
- Heat coverage approx 12m<sup>2</sup>
- Steel cover, size: 500 x 360mm
- Heating element: Carbon tube
- Outdoor use only
- Waterproof: IP44
- Pull-string switch control
- Tip over switch
- Stand included

## OPAL

Outdoor/Indoor Pedestal Heater

3 Heat  
Settings

IP44  
Rated

KG  
8.4kg

| Code         | Description                         | Finish | Power (w) | Dimensions                 |
|--------------|-------------------------------------|--------|-----------|----------------------------|
| ZR-38156-BLK | Opal Outdoor/Indoor Pedestal Heater | Black  | 2000      | H:1710-2100mm<br>Dia:500mm |




**3**  
HEAT  
SETTINGS

**IP55**



- Remote control
- Hanging and wall mount type
- 3 heat settings - 900/1900/2800W
- Heat coverage approx 25m<sup>2</sup>
- 4 Hour timer
- 1.9M Cable
- Black brushed aluminium finish
- PIR economy function

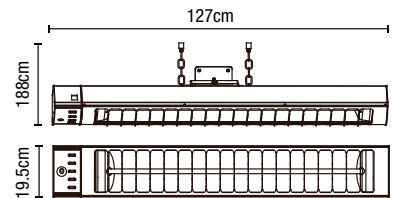

## JET

### Outdoor Ceiling Mount Heater




| Code         | Description                      | Finish | Power (w) | Dimensions               |
|--------------|----------------------------------|--------|-----------|--------------------------|
| ZR-37443-BLK | Jet Outdoor Ceiling Mount Heater | Black  | 2800      | H:188mm W:1270mm L:195mm |





**3**  
HEAT  
SETTINGS

**IP65**

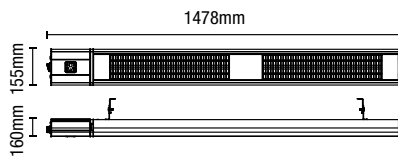

- Ideal for commercial applications
- Remote control operated
- Variable heat setting
- 1-9 Hour Timer
- Heat coverage 20m<sup>2</sup>
- IP65 rating
- Outdoor use only



# GLOW

Wall Mounted Heater



| Code         | Description              | Finish | Power (w) | Dimensions                     |
|--------------|--------------------------|--------|-----------|--------------------------------|
| ZR-32301-BLK | Glow Wall Mounted Heater | Black  | 3000      | H:160mm W:1478mm<br>Proj:155mm |

3  
HEAT  
SETTINGS

IP55



- Ideal for indoor/outdoor use
- Remote control operated
- 3 variable heat settings
- 0-24 Hour Timer
- Heat coverage approx 12m<sup>2</sup>
- IP55 rating

## INDOOR/OUTDOOR

Wall Mount Heater with 24Hr Timer

  
3 Heat  
Settings

  
IP55  
Rated

  
3.1kg

| Code         | Description                       | Finish | Power (w) | Dimensions                |
|--------------|-----------------------------------|--------|-----------|---------------------------|
| ZR-32328-BLK | Wall Mount Heater with 24Hr Timer | Black  | 2000      | H:140mm W:900mm<br>L:90mm |






IP65



- Bluetooth speaker
- Remote control operated
- Heat coverage approx 12m<sup>2</sup>
- 1.5M HO7RN-F 3G1.5MM cable
- ON/OFF and power adjust for remote
- IPX5
- Outdoor use only

## FLINT

Wall Mount Heater with Bluetooth Speaker


 Bluetooth Speaker | 
  IPX5 Rated | 
  3.5kg

| Code         | Description                              | Finish | Power (w) | Dimensions              |
|--------------|--|--------|-----------|-------------------------|
| ZR-37444-BLK | Flint Wall Mounted Heater with Bluetooth | Black  | 2000      | H:120mm W:745mm L:110mm |

IP45




- Carbon fibre tube
- ON/OFF switch
- Fabric-flocked vents area
- 1.8M cable
- Heat coverage approx 4m<sup>2</sup>
- IP45 rated

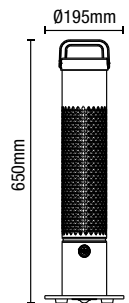

## HARRY

Outdoor Portable Table Heater




| Code         | Description                         | Finish     | Power (w) | Dimensions           |
|--------------|-------------------------------------|------------|-----------|----------------------|
| ZR-37441-BLK | Harry Outdoor Portable Table Heater | Matt Black | 1200      | H:650mm<br>Dia:195mm |



**3**  
HEAT  
SETTINGS

**IP55**

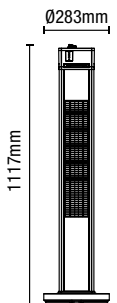

- Remote control operated
- Tip over safety switch
- 3 variable heat settings
- Heat coverage approx 10m<sup>2</sup>
- IP55 rated
- Outdoor use only

## BLAZE

Standing Patio Heater



3 Heat  
Settings

IP55  
Rated


7.8kg

| Code         | Description                 | Finish | Power (w) | Dimensions            |
|--------------|-----------------------------|--------|-----------|-----------------------|
| ZR-32300-BLK | Blaze Standing Patio Heater | Black  | 1600      | H:1117mm<br>Dia:283mm |





IP55

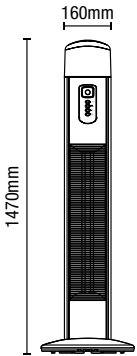

- 2 heat settings: 1480/2960W
- Carbon fibre heating technology
- Large, effective heating area of up to 30m<sup>2</sup>
- PIR economy system
- IP55 rated
- 12W LED Colour changing light: Warm/Daylight/Cool
- Gun metal hammered finish with fabric flocked grille with storage cover
- Magnetic remote control

# AMBER

## Floor Standing Outdoor Heater



2 Heat Settings



IP55 Rated




21.8kg

| Code          | Description                | Finish    | Power (w) | Dimensions         |
|---------------|----------------------------|-----------|-----------|--------------------|
| ZR-37442-GMTL | Amber Free Standing Heater | Gun Metal | 3000      | H:1470mm Dia:160mm |

IPX3



- Iron lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 10m<sup>2</sup>
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- Each lamp independently switched
- Outdoor use only



## TOPAZ

2 x 800W Parasol Heater




| Code         | Description          | Finish | Power (w) | Dimensions                     |
|--------------|----------------------|--------|-----------|--------------------------------|
| ZR-37448-BLK | Topaz Parasol Heater | Black  | 2 x 800   | H:2141mm W:804mm<br>Proj:198mm |





- Aluminium diecast lamp case
- 1.4M HO5RN-F 3G1.0MM cable
- Heat coverage approx 12m<sup>2</sup>
- IPX3 rated
- BS1363 plug
- Ruby halogen lamp
- ON/OFF switch
- Outdoor use only

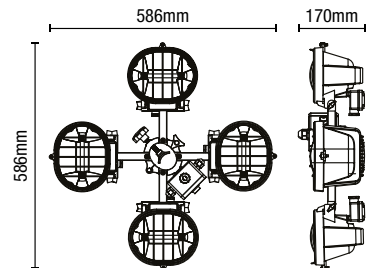

## RUBY

4 x 450W Parasol Heater



| Code         | Description         | Finish | Power (w) | Dimensions                    |
|--------------|---------------------|--------|-----------|-------------------------------|
| ZR-37445-BLK | Ruby Parasol Heater | Black  | 4 x 450   | H:170mm W:586mm<br>Proj:586mm |



## IP66 13A SWITCHED SOCKET

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries
- Certified to BS 1363-2



| Code     | Description            |
|----------|------------------------|
| ZN-38865 | 1 Gang IP66 13A Socket |
| ZN-38863 | 2 Gang IP66 13A Socket |

## IP66 RCD 13A SWITCHED SOCKET

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries
- Trip Current: 30mA
- Trip Speed: 100ms
- Certified to BS 1363-2
- RCD Type A



| Code     | Description                |
|----------|----------------------------|
| ZN-38864 | 2 Gang IP66 RCD 13A Socket |

## FUSED SPUR SWITCHED

IP66

IK08

- IP66 / IK08 rated
- Lockable lid
- Multiple 20mm cable entries



| Code     | Description          |
|----------|----------------------|
| ZN-38870 | Switched + Indicator |

## IP66 EMPTY ENCLOSURE

IP66

IK08

- Accepts standard switches and sockets
- IP66 / IK08 rated
- Multiple 20mm cable entries



| Code     | Description            |
|----------|------------------------|
| ZN-38869 | 1 Gang Empty Enclosure |
| ZN-38868 | 2 Gang Empty Enclosure |

## IP66 20A SWITCH

IP66

IK08

- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



| Code     | Description             |
|----------|-------------------------|
| ZN-38866 | 1 Gang 1 Way 20A Switch |
| ZN-38867 | 2 Gang 2 Way 20A Switch |

## IP66 20A BELL SWITCH

IP66

IK08

- IP66 / IK08 rated
- Neon indicator
- Multiple 20mm cable entries
- Manufactured to BS EN 60669-1



| Code     | Description                  |
|----------|------------------------------|
| ZN-38871 | 1 Gang 1 Way 20A Bell Switch |


**390  
Lumens**



- Polycarbonate construction
- Can detect day or night with adjustable LUX
- 6m Detection Distance
- 10 secs - 5min adjustable timer
- 8W LED module (SMD)

## RENO

LED Recessed PIR Spotlight



| Code         | Power (w) | Colour (k) | Total Flux (lm) | Distance | Range | LUX (adjustable) | Time Delay (adjustable)         | Dimensions          |
|--------------|-----------|------------|-----------------|----------|-------|------------------|---------------------------------|---------------------|
| ZN-35690-WHT | 8W        | 4000k      | 500             | Max 6m   | 360°  | <3-2000 LUX      | Min.10sec±3sec<br>Max.5min±1min | Dia:105mm<br>H:48mm |

**MANUAL  
OVERRIDE**



**IP44**



- Polycarbonate construction
- LED compatible
- Manual override function
- 20m max detection distance
- Can be installed up to 6m high

## NAPA

Adjustable Wall PIR Sensor



| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions                  |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-----------------------------|
| ZN-35691-BLK | 2 – 6m              | Max 20m  | 360°  | 3-2000 LUX (adjustable) | 2000W Halogen<br>600W LED | H:56mm W:87mm<br>Proj:173mm |



- Polycarbonate construction
- LED compatible
- Adjustable LUX and timer
- Manual override (8 hrs)
- Detection Distance: 5 - 12m
- Timer: 10 secs - 15min



MANUAL  
OVERRIDE

IP65



## DION

### Adjustable Motion Sensor



IP65  
Rated



PIR  
Sensor



0.15kg

| Code         | Finish | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions                         |
|--------------|--------|---------------------|----------|-------|-------------------------|---------------------------|------------------------------------|
| ZN-33579-BLK | Black  | 1.6 – 2.5m          | 5 – 12m  | 180°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:51.5mm<br>W:80mm<br>Proj:119.5mm |
| ZN-33579-WHT | White  |                     |          |       |                         |                           |                                    |



IP44



- Polycarbonate construction
- LED compatible
- Detection Distance: 5 - 12m
- Timer: 10 secs - 7min

## DION

### Motion Sensor



IP44  
Rated



PIR  
Sensor



0.18kg

| Code          | Finish    | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions                      |
|---------------|-----------|---------------------|----------|-------|-------------------------|---------------------------|---------------------------------|
| ZN-25151-BLK  | Black     | 1.6 – 2.5m          | 5 – 12m  | 180°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:150mm<br>W:90mm<br>Proj:120mm |
| ZN-25151-WHT  | White     |                     |          |       |                         |                           |                                 |
| ZN-25151-DGRY | Dark Grey |                     |          |       |                         |                           |                                 |

IP44

MANUAL  
OVERRIDE



Corner or flush mounted



- Polycarbonate construction
- LED compatible
- Detection Distance: max 12m

## ALIA

### Adjustable Motion Sensor



IP44  
Rated



PIR  
Sensor



0.15kg

| Code         | Finish | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions                     |
|--------------|--------|---------------------|----------|-------|-------------------------|---------------------------|--------------------------------|
| ZN-33615-BLK | Black  | 1.6 – 2.5m          | max 12m  | 180°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:120mm<br>W:78mm<br>Proj:53mm |
| ZN-33615-WHT | White  |                     |          |       |                         |                           |                                |



**IP20**



**x3  
SENSOR**

- LED compatible
- 3 integral sensors
- 20m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction

## LOCA

### Advanced Motion Sensor





| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions             |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|------------------------|
| ZN-29177-WHT | 2.2–6m              | Max 20m  | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>500W LED | L:102mm W:102mm H:58mm |



**IP20**



**x3  
SENSOR**

- LED compatible
- 3 integral sensors
- 12m max detection distance
- 360° detection range
- 10 secs – 7 mins adjustable timer
- Polycarbonate construction

## LOCA

### Motion Sensor





| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions      |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-----------------|
| ZN-25154-WHT | 2.2–4m              | 12m max  | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:55mm Dia:88mm |



# ALIA

CORNER MOTION SENSOR



## AVAILABLE SETTINGS

**TIME DELAY**  
Min: 10 sec±3sec  
Max: 7min±1min

**DETECTION RANGE**  
360°

**DETECTION DISTANCE**  
Max 12m (<24°)

IP44



- Polycarbonate construction
- LED compatible
- Can be fitted to an external or internal corner.
- Mount can be removed to fit flush against walls.
- Detection Distance: 5 - 12m
- Detection Range: 360°
- Timer: 10 secs - 7min

- Removeable corner mount

## ALIA

Corner Motion Sensor



IP44  
Rated



PIR  
Sensor



0.18kg

| Code          | Finish    | Installation Height | Distance | Range | LUX                     | Max Rated Load | Dimensions                     |
|---------------|-----------|---------------------|----------|-------|-------------------------|----------------|--------------------------------|
| ZN-25152-BLK  | Black     | 1.8-2.5m            | 5 - 12m  | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen  | H:79mm<br>W:60mm<br>Proj:119mm |
| ZN-25152-WHT  | White     |                     |          |       |                         | 300W LED       |                                |
| ZN-25152-DGRY | Dark Grey |                     |          |       |                         | <b>NEW</b>     |                                |



- LED compatible
- 6m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

## LOCA

Motion Sensor



| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions      |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-----------------|
| ZN-25153-WHT | 2.2-4m              | Max 6m   | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:46mm Dia:88mm |



- Easily remove cover when recessed to adjust settings
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 15 mins adjustable timer
- Polycarbonate construction

## LOCA

Recessed Motion Sensor



| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions        |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-------------------|
| ZN-25155-WHT | 2.2-4m              | Max 8m   | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>200W LED | H:16.8mm Dia:50mm |

- 3 mounting positions
- LED compatible
- 8m max detection distance
- 360° detection range
- 10 secs – 30 mins adjustable timer
- Polycarbonate construction



## THEA

### Conduit Motion Sensor



| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions      |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-----------------|
| ZN-31805-WHT | 2.2–4m              | Max 8m   | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:39mm Dia:80mm |

- LED compatible
- Adjustable LUX level
- 1, 2, 3, 4, 5, 6, 7, 8, 9 hours timer
- Polycarbonate construction



## ADRA

### Dusk Till Dawn Sensor



| Code         | Timer                           | LUX                    | Max Rated Load            | Dimensions               |
|--------------|---------------------------------|------------------------|---------------------------|--------------------------|
| ZN-25156-BLK | 1, 2, 3, 4, 5, 6, 7, 8, 9 Hours | 3-500 LUX (adjustable) | 1200W Halogen<br>250W LED | H:190mm W:70mm Proj:41mm |

- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 2 – 15m detection distance when wall mounted
- 1.8mm radius when ceiling mounted
- 180/360° detection range
- 10 secs – 12 mins adjustable timer




## THEA

### Wall/Ceiling Microwave Sensor



| Code         | Installation Height | Distance | Range    | LUX                     | Max Rated Load            | Dimensions           |
|--------------|---------------------|----------|----------|-------------------------|---------------------------|----------------------|
| ZN-29185-WHT | 1.6 – 3.5m          | 2 – 15m  | 180/360° | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | L:76mm W:37mm H:25mm |

**IP65**

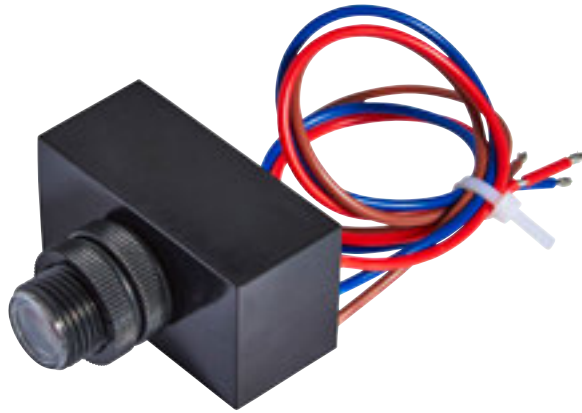

- Rated current: 10A
- Ambient light: <10LUX

## ADRA Photocell Sensor



IP65  
Rated



16.5mm  
Cut-out



Photocell  
Sensor



0.1kg

| Code         | Description           | Finish | Max Rated Load            | Dimensions                  |
|--------------|-----------------------|--------|---------------------------|-----------------------------|
| ZN-38599-BLK | Adra Photocell Sensor | Black  | 1200W Halogen<br>300W LED | H:70mm W:110mm<br>Proj:35mm |

**IP65**



- Polycarbonate construction
- LED compatible
- Detection Distance: max 10m
- Detection Range: 360°
- Timer: 10 secs - 30min

## DION Batten Motion Sensor



IP65  
Rated



PIR  
Sensor



0.085kg

| Code         | Finish | Installation Height | Distance | Range | LUX                           | Max Rated Load            | Dimensions                     |
|--------------|--------|---------------------|----------|-------|-------------------------------|---------------------------|--------------------------------|
| ZN-38600-WHT | White  | 1.6 – 2.5m          | max 10m  | 360°  | 3-2000<br>LUX<br>(adjustable) | 1200W Halogen<br>300W LED | H:28mm<br>W:33mm<br>Proj:113mm |

IP20



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 1 – 8m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

## THEA

### Stealth Microwave Sensor



Microwave Sensor

0.11kg

| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions       |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|------------------|
| ZN-29186-WHT | 1.6 – 3.5m          | 1 – 8m   | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>500W LED | H:24mm Dia:115mm |

IP44



- Greater installation height
- Increased detection range
- Can sense movement through most building materials
- LED compatible
- 5 – 15m detection distance
- 360° detection range
- 10 secs – 12 mins adjustable timer

## THEA

### Recessed Microwave Sensor



62mm Cut-out



Microwave Sensor



0.10kg

| Code         | Installation Height | Distance | Range | LUX                     | Max Rated Load            | Dimensions        |
|--------------|---------------------|----------|-------|-------------------------|---------------------------|-------------------|
| ZN-29187-WHT | 1.6 – 3.5m          | 5 – 15m  | 360°  | 3-2000 LUX (adjustable) | 1200W Halogen<br>300W LED | H:75.4mm Dia:76mm |





## SOLAR

The new Zink solar range offers a wide selection of solar powered, functional, aesthetic, domestic light fittings, that are easily installed without the expense and damage caused by laying cable for traditional 240V lighting.

|                        |         |
|------------------------|---------|
| POST/LANTERN           | 126-130 |
| GROUND                 | 131     |
| WALL LIGHTS            | 132-134 |
| PIR WALL LIGHTS        | 135-140 |
| SECURITY & FLOODLIGHTS | 141     |
| SPIKE LIGHTS           | 142-147 |
| DECK LIGHTING          | 148     |
| FESTOON                | 149     |





**NEW**  
FOR  
2023




**IP44**



- ABS & Polycrystalline construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

## CADEBY

### LED Solar Wall Lantern



| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                    |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|-------------------------|-------------------------------|
| ZN-42031 | Black  | Cadeby Solar LED Wall Lantern | 1W        | 3000k      | 15         | 6-8hrs      | 1 x 1.2V AA NiMH 900mAh | W:140mm H:205mm<br>Proj:160mm |

**NEW**  
FOR  
2023



**IP44**



- ABS & Polycrystalline construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

## CADEBY

### LED Solar Post Lantern



| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions            |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|-------------------------|-----------------------|
| ZN-42032 | Black  | Cadeby Solar LED Post Lantern | 1W        | 3000k      | 15         | 6-8hrs      | 1 x 1.2V AA NiMH 900mAh | H:575mm<br>Dia. 170mm |



**NEW**  
FOR  
2023



**IP44**



- OFF/Low/High light function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

## HORDEN

### LED Solar Hanging Wall Lantern



| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries                | Dimensions                 |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|--------------------------|----------------------------|
| ZN-42033 | Black  | Horden Solar LED Wall Lantern | 1W        | 3000k      | 15         | 6-8hrs      | 1 x 1.2V AA NiMH 1000mAh | W:175mm H:380mm Proj:225mm |

**NEW**  
FOR  
2023



**IP44**



- OFF/Low/High function
- Iron, aluminium and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

## TANFIELD

### LED Solar Post Lantern



| Code     | Finish | Description                     | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions         |
|----------|--------|---------------------------------|-----------|------------|------------|-------------|-------------------------|--------------------|
| ZN-42034 | Black  | Tanfield Solar LED Post Lantern | 1W        | 3000k      | 200        | 6-8hrs      | 1 x 1.2V AA NiMH 900mAh | H:575mm Dia. 170mm |




**NEW**  
FOR  
2023



**IP44**




- Stainless steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## CRESWELL

### LED Solar Wall Light



| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                 |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|-------------------------|----------------------------|
| ZN-42043 | SST    | Creswell Solar LED Wall Light | 0.6W      | 6000k      | 30         | 6-8hrs      | 2 x 1.2V AA NiMH 900mAh | W:117mm H:365mm Proj:145mm |


**NEW**  
FOR  
2023



**IP44**



- Stainless steel (201) construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant

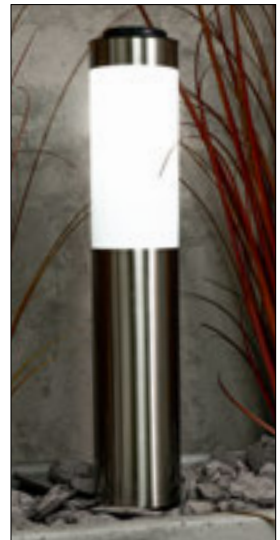

## CRESWELL

### LED Solar Spike Light



| Code     | Finish | Description                    | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions         |
|----------|--------|--------------------------------|-----------|------------|------------|-------------|-------------------------|--------------------|
| ZN-42044 | SST    | Creswell Solar LED Spike Light | 0.6W      | 6000k      | 30         | 6-8hrs      | 2 x 1.2V AA NiMH 900mAh | H:365mm Dia. 117mm |

**NEW**  
FOR  
2023



**ENERGY  
SAVING**

**IP65**



**SOLAR**



- Low level design for installation almost anywhere
- 121mm x 121mm design to fit on top of a fence post as well as a ground light
- Aluminium and PVC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Built in photocell sensor for auto ON at dusk/dawn
- Charge lasts up to 8 hours after full charge
- IP65 weather resistant



## TANFIELD

### LED Solar Post/Ground Light



IP44  
Rated



4000K  
CW



0.28kg



Class 3

| Code     | Finish | Description                          | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                |
|----------|--------|--------------------------------------|-----------|------------|------------|-------------|-------------------------|---------------------------|
| ZN-42035 | Black  | Tanfield Solar LED Post/Ground Light | 1W        | 4000k      | 30         | 6-8hrs      | 1 x 1.2V AA NiMH 600mAh | L:121mm W:121mm Proj:29mm |

**NEW**  
FOR  
2023



**ENERGY  
SAVING**

**IP44**



**SOLAR**



- Stainless steel (201) and glass construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## WISTOW

### LED Solar Wall Light



IP44  
Rated



3000K  
WW



0.6kg



Class 3

| Code     | Finish | Description                 | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries                | Dimensions             |
|----------|--------|-----------------------------|-----------|------------|------------|-------------|--------------------------|------------------------|
| ZN-42039 | Black  | Wistow Solar LED Wall Light | 0.4W      | 3000k      | 10         | 6-8hrs      | 1 x 1.2V AA NiMH 1000mAh | W:83mm H:205 Proj:53mm |



**NEW**  
FOR  
2023

**ENERGY  
SAVING**

**IP44**

**SOLAR**

- Stainless steel (201) construction
- OFF/Dim 1/Dim 2/Dim 3 push button switch
- Separate solar panel with 5m cable allows installation in areas with no mains power
- Solar panel can be charge with the mini USB-A cable
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## ELDON

LED Up/Down Solar Wall Light

 IP44 Rated  
 3000K WW  
 0.66kg  
 Class 3

| Code     | Finish | Description                | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                |
|----------|--------|----------------------------|-----------|------------|------------|-------------|-------------------------|---------------------------|
| ZN-42040 | SST    | Eldon Solar LED Wall Light | 2W        | 3000k      | 150        | 6-8hrs      | 1 x 3.7V Li-ion 2000mAh | W:77mm H:185mm Proj:110mm |
| ZN-42041 | Black  |                            |           |            |            |             |                         |                           |

**NEW**  
FOR  
2023



**ENERGY  
SAVING**

**IP44**



**SOLAR**



- Stainless steel (201) & PC construction
- OFF/Low/High switch function
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## TRIMDON

LED Solar Downlight



IP44  
Rated



3000K  
WW




0.42kg




Class 3

| Code     | Finish | Description                 | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries                  | Dimensions                   |
|----------|--------|-----------------------------|-----------|------------|------------|-------------|----------------------------|------------------------------|
| ZN-42045 | SST    |                             |           |            |            |             |                            |                              |
| ZN-42046 | Black  | Trimdon Solar LED Downlight | 1W        | 3000k      | 100        | 6-8hrs      | 1 x 3.7V<br>Li-ion 1200mAh | W:90mm H:135mm<br>Proj:120mm |
| ZN-42047 | Anth   |                             |           |            |            |             |                            |                              |



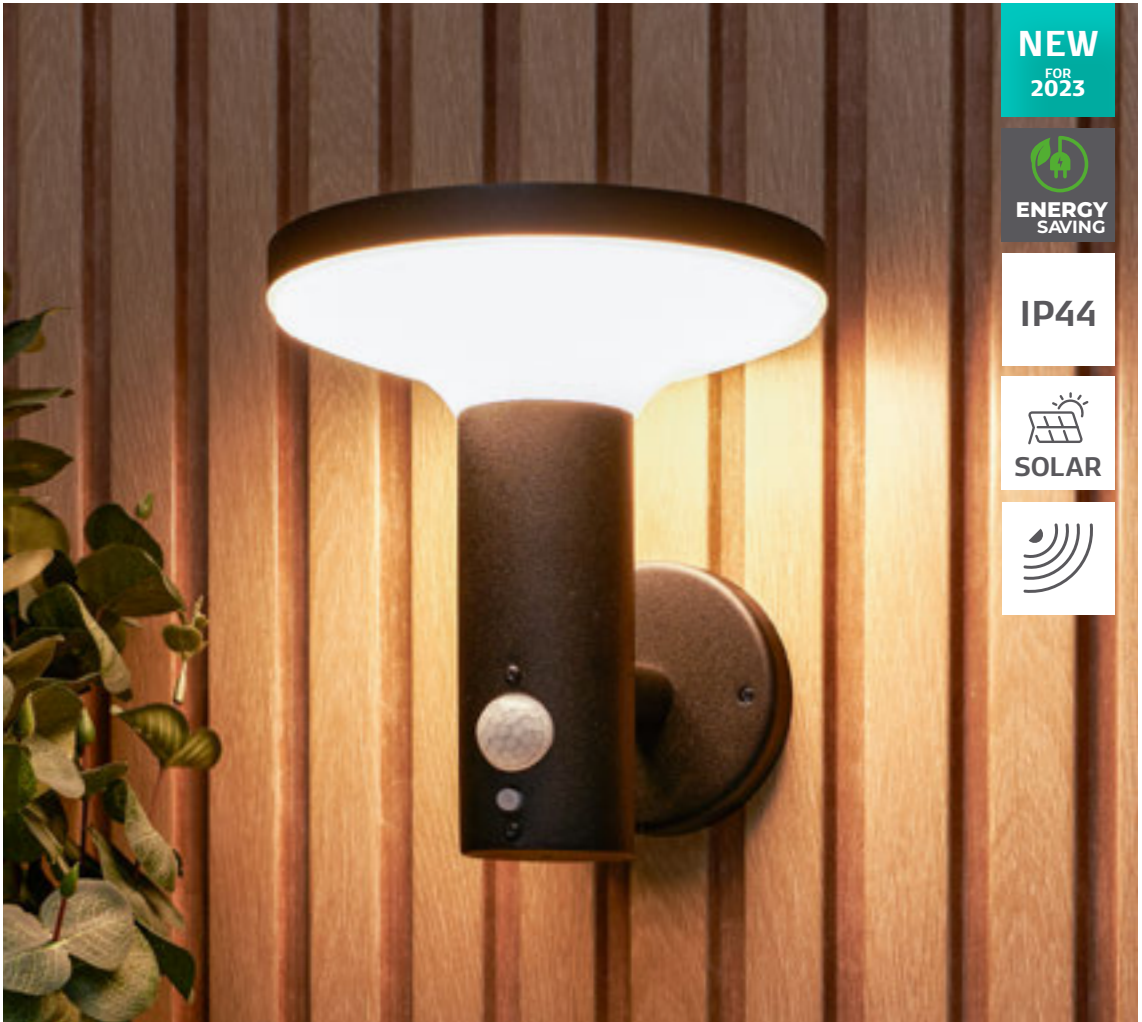

- 3 Modes: a) Always ON 60lm b) Always ON 60lm, Motion Detected 240lm 25secs c) Always OFF, Motion Detection Detected 600lm 25secs d) OFF
- Stainless steel (201) & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 8-12m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## CLAIRE

LED Solar Wall Light with PIR Sensor



| Code     | Finish | Description                          | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                 |
|----------|--------|--------------------------------------|-----------|------------|------------|-------------|-------------------------|----------------------------|
| ZN-42048 | SST    | Claire Solar LED Wall Light with PIR | 5.6W      | 3000k      | 600        | 6-8hrs      | 1 x 3.7V Li-ion 2200mAh | W:160mm H:180mm Proj:162mm |
| ZN-42049 | Black  |                                      |           |            |            |             |                         |                            |



200  
Lumens


IP44



SOLAR



- Glass lens with ABS and steel construction
- Battery: 1800mAh Li-ion
- Time on: 30 seconds
- 3-5m Detection Distance
- 2W LED module (SMD)
- K: 6000
- Lm: 200
- Lm/W: 100
- Hrs: 20,000

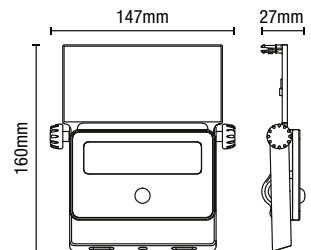

## SOLAR

Security Sensor Light



IP44  
Rated



6000K  
DW



PIR  
Sensor

| Code         | Finish | Description                 | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                    |
|--------------|--------|-----------------------------|-----------|------------|-----------------|-------------------|-------------------------------|
| ZN-37052-BLK | Black  | Solar Security Sensor Light | 2W        | 6000k      | 200             | 100               | H:160mm W:147mm<br>Proj:134mm |



- OFF/High/Low push button function
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 15 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## MARLEY

### LED Solar Wall Light with PIR Sensor



| Code     | Finish | Description                        | Power (w) | Colour (k) | Lumen (lm)            | Charge Time | Batteries                  | Dimensions                  |
|----------|--------|------------------------------------|-----------|------------|-----------------------|-------------|----------------------------|-----------------------------|
| ZN-42037 | Black  | Marley Solar LED Wall Light w/ PIR | 4W        | 6000k      | 230 (hi)<br>100 (low) | 6-8hrs      | 1 x 3.7V<br>Li-ion 1500mAh | H:125mm W:95mm<br>Proj:49mm |

**NEW**  
FOR  
2023




**ENERGY  
SAVING**

**IP44**



**SOLAR**

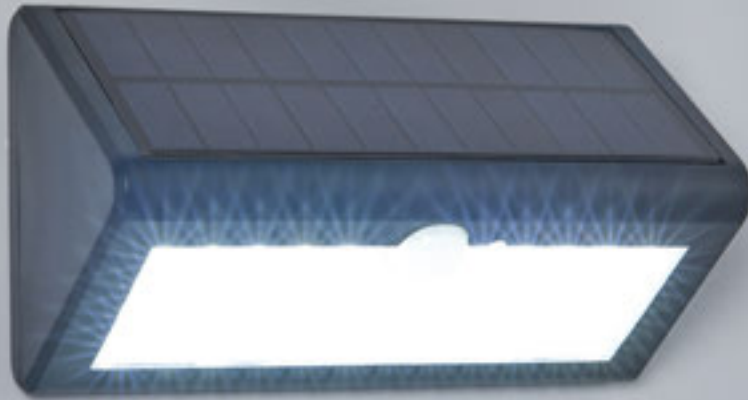

- OFF/High/Low push button function
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- PIR sensor turns light on for 25 seconds after sensing movement with 3-5m detection distance
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## DAWDON

LED Solar Wall Light with PIR Sensor



IP44  
Rated



6000K  
DW



0.39kg



Class 3

| Code     | Finish | Description                        | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries                  | Dimensions                   |
|----------|--------|------------------------------------|-----------|------------|------------|-------------|----------------------------|------------------------------|
| ZN-42042 | Black  | Dawdon Solar LED Wall Light w/ PIR | 9.2W      | 6000k      | 450        | 6-8hrs      | 2 x 3.7V<br>Li-ion 2000mAh | H:115mm W:207mm<br>Proj:85mm |



- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- Battery < 30% OFF Dusk/Dawn, 400lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## BLACKHALL

### LED Solar Wall Light with Microwave Sensor

 IP44 Rated
  6500K DW
  0.54kg
  Class 3

| Code     | Finish | Description                    | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                 |
|----------|--------|--------------------------------|-----------|------------|------------|-------------|-------------------------|----------------------------|
| ZN-42056 | Black  | Blackhall Solar LED Wall Light | 4.5W      | 6500k      | 400        | 6-8hrs      | 2 x 3.7V Li-ion 3000mAh | H:195mm W:230mm Proj:103mm |

**NEW**  
FOR  
2023




**ENERGY  
SAVING**

**IP44**



**SOLAR**

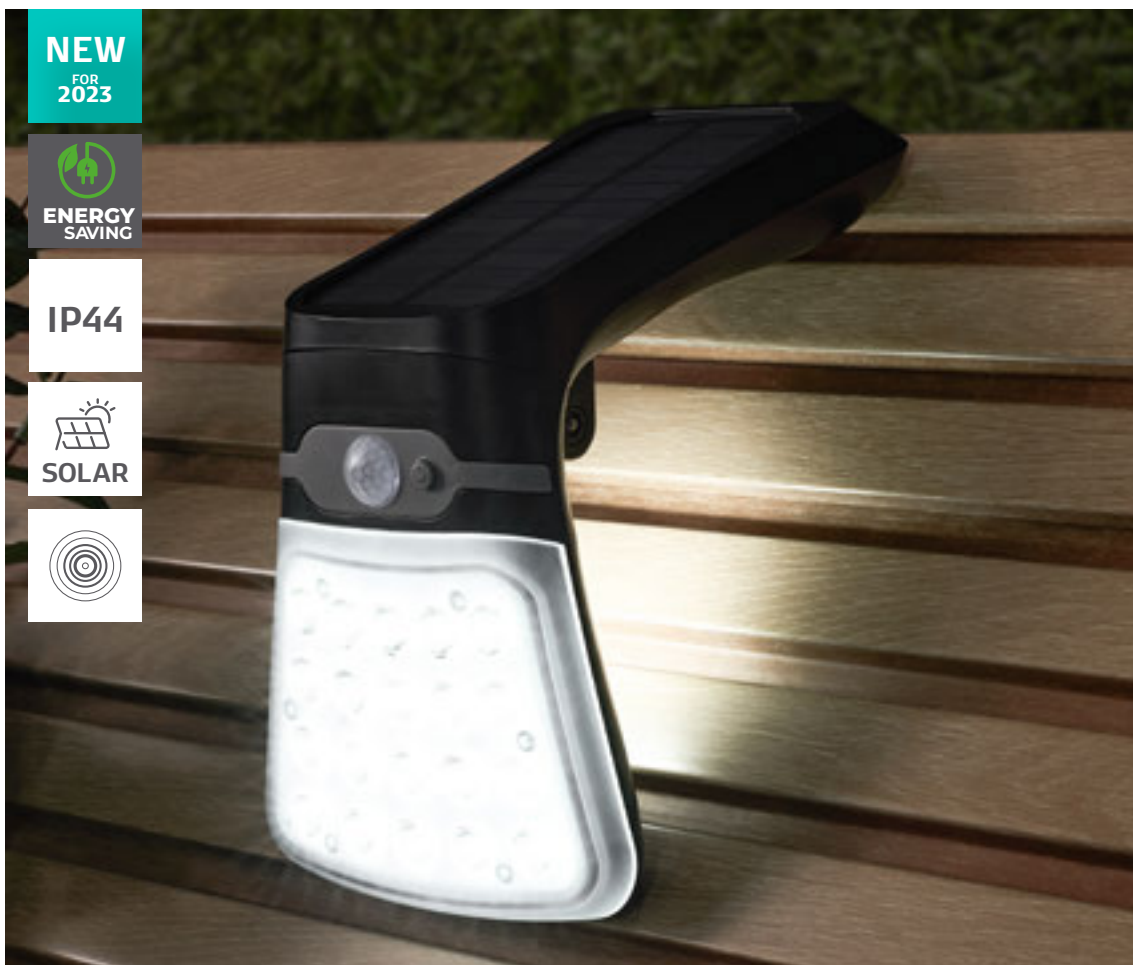

- Battery > 30% AUTO ON 20lm at Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs < 30% OFF Dusk/Dawn, 230/300lm when motion detected by microwave sensor 15secs
- ABS construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Microwave and photocell sensor
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## BLACKHALL

LED Solar Wall Light with Microwave Sensor



IP44  
Rated




6500K  
DW



Class 3

| Code     | Description                    | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries                 | Dimensions                    | Weight (kg) |
|----------|--------------------------------|-----------|------------|------------|-------------|---------------------------|-------------------------------|-------------|
| ZN-42054 | Blackhall Solar LED Wall Light | 2.5W      | 6500k      | 230        | 4-6hrs      | 1x 3.7V<br>Li-ion 1500mAh | H:190mm W:95mm<br>Proj:90mm   | 0.22kg      |
| ZN-42055 |                                | 3.5W      | 6500k      | 300        |             | 1x 3.7V<br>Li-ion 1800mAh | H:225mm W:115mm<br>Proj:105mm | 0.28kg      |

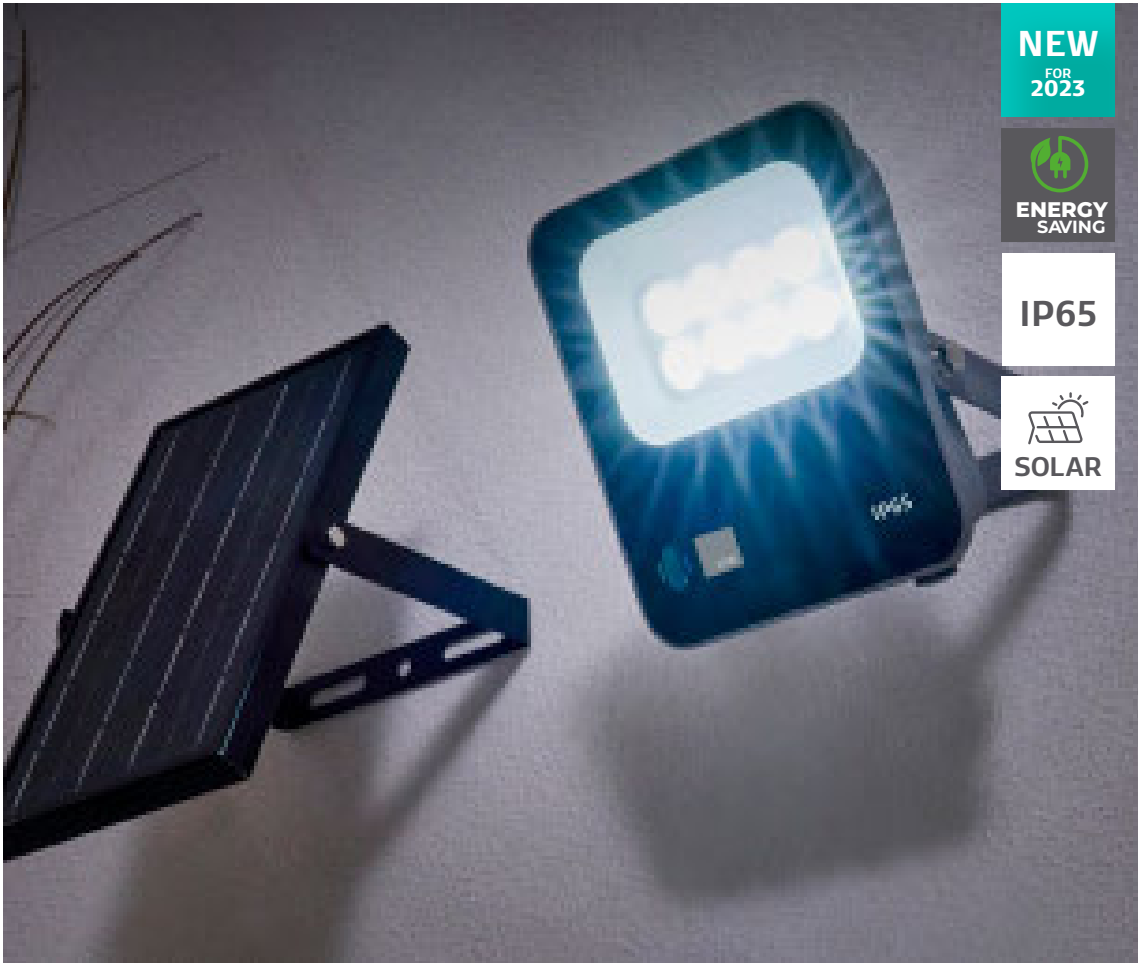

- Remote control operated with adjustable functions. ON/OFF, Brightness ±, Timer 3, 5 or 8 Hours, Automatic.
- Aluminium, glass & steel construction
- Separate solar panel with 1m cable allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 12 hours after full charge
- IP65 weather resistant
- Available in 3 sizes and wattages



## DENBY

### LED Solar Floodlight



| Code     | Description                | Power (w) | Colour (k) | Lumen (lm) | Working Time | Batteries                | Dimensions                    | Weight (kg) |
|----------|----------------------------|-----------|------------|------------|--------------|--------------------------|-------------------------------|-------------|
| ZN-42051 | Denby LED Solar Floodlight | 1.5W      | 6500k      | 300        | 12hrs        | 1 x 3.7V<br>LiPo 2500mAh | W:150mm H:170mm<br>Proj:113mm | 1.076kg     |
| ZN-42052 | Denby LED Solar Floodlight | 2.5W      | 6500k      | 450        | 12hrs        | 2 x 3.7V<br>LiPo 5000mAh | W:182mm H:203mm<br>Proj:135mm | 1.6kg       |
| ZN-42053 | Denby LED Solar Floodlight | 6W        | 6500k      | 1000       | 12hrs        | 2 x 3.2V<br>LiPo 1000mAh | W:195mm H:230mm<br>Proj:155mm | 2.1kg       |







- Compatible with Smart Apps
- ABS & PC construction
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- Charge lasts up to 6 hours on high, 12 hours on low brightness after full charge
- IP65 weather resistant



## BYERMOOR

### LED Solar Smart Spike Light

Bluetooth | 
 Alexa | 
 Google Home | 
 Tuya Smartlife | 
 IP65 Rated | 
 RGBW CCT | 
 0.3kg | 
 Class 3

| Code     | Finish | Description                          | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions            |
|----------|--------|--------------------------------------|-----------|------------|------------|-------------|-------------------------|-----------------------|
| ZN-42050 | Black  | Byermoor LED Solar Smart Spike Light | 1W        | RGB+W CCT  | 50         | 6hrs        | 1 x 5.5V Li-ion 1200mAh | H:420mm W:107 D:145mm |







**NEW**  
FOR  
2023

**ENERGY  
SAVING**

**SOLAR**

**IP54**



- 4 Modes: a) Always ON 90lm b) Always ON 90lm, Motion Detected 500lm 30secs c) Always OFF, Motion Detection Detected 500lm 30secs d) SOS
- ABS & PC construction
- Supplied with IR remote control
- Integrated solar panel allows installation in areas with no mains power
- Energy saving solar powered LED light
- 4-6m detection distance
- Charge lasts up to 8 hours after full charge
- IP54 weather resistant



## BRADLEY

### LED Solar Floodlight with Ground Spike

 IP54 Rated
  6500K DW
  0.38kg
  Class 3

| Code     | Finish | Description                    | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                 |
|----------|--------|--------------------------------|-----------|------------|------------|-------------|-------------------------|----------------------------|
| ZN-42057 | Black  | Blackhall Solar LED Wall Light | 3W        | 6500k      | 500        | 8-9hrs      | 1 x 3.7V Li-ion 1200mAh | H:610mm W:345mm Proj:130mm |

**NEW**  
FOR  
2023



**ENERGY  
SAVING**



**SOLAR**

**IP65**



- Supplied with IR remote control
- ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant



## MALTBY

### LED Solar Spike Light Kit



IP65  
Rated



RGB  
+4000k



0.82kg



Class 3

| Code     | Finish | Description                      | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                   |
|----------|--------|----------------------------------|-----------|------------|------------|-------------|-------------------------|------------------------------|
| ZN-42058 | Black  | Maltby LED Solar Spike Light Kit | 2W        | RGB+ 4000K | 200        | 8-10hrs     | 2 x 3.7V Li-ion 2400mAh | H:250mm Dia. 40mm (per lamp) |



**NEW**  
FOR  
2023

**ENERGY  
SAVING**

**SOLAR**

**IP65**

**RGB  
+4K**

- Supplied with IR remote control
- ABS & PC construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Lamps can be spike or deck mounted
- IP65 weather resistant



## DAW LED Solar Spike Light Kit

 IP65 Rated  
 RGB +4000k  
 0.65kg  
 Class 3


| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                   |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|-------------------------|------------------------------|
| ZN-42059 | Black  | Daw LED Solar Spike Light Kit | 2W        | RGB+ 4000K | 200        | 8-10hrs     | 2 x 3.7V Li-ion 2400mAh | H:230mm Dia. 37mm (per lamp) |



NEW  
FOR  
2023



IP65

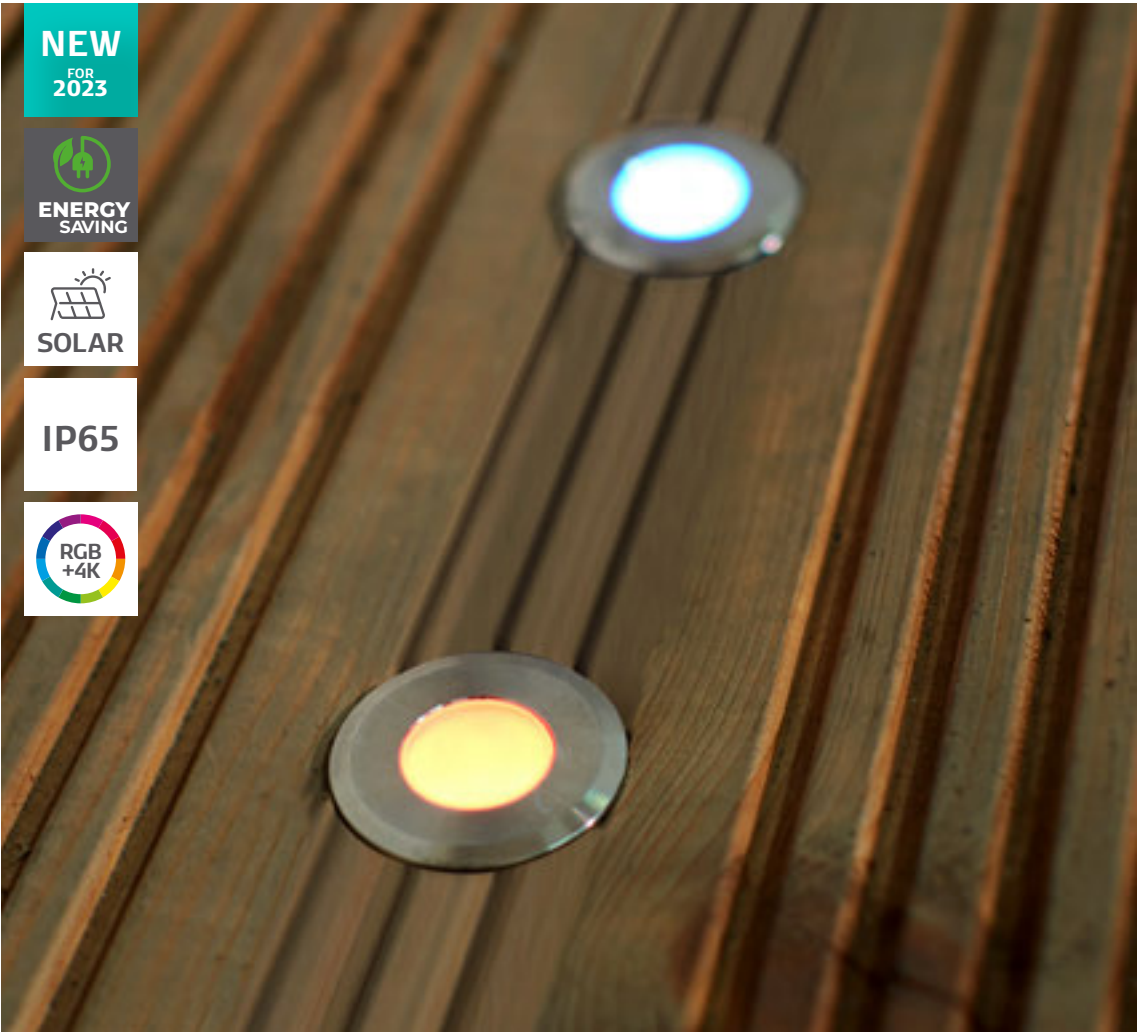

- Supplied with IR remote control
- Stainless steel (201), ABS & Glass construction
- Solar panel has 4m cable until first lamp then 2m spacing between each lamp
- Energy saving solar powered LED light
- Solar panel can be spike or deck mounted
- IP65 weather resistant



## AYLE

### LED Solar Deck Light Kit



| Code     | Finish | Description                   | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions                    |
|----------|--------|-------------------------------|-----------|------------|------------|-------------|-------------------------|-------------------------------|
| ZN-42060 | Black  | Ayle LED Solar Deck Light Kit | 2W        | RGB+4000K  | 200        | 8-10hrs     | 2 x 3.7V Li-ion 2400mAh | H:47mm Dia. 41.5mm (per lamp) |






- 4 Light Modes: ON/Slow Flash/Fast Flash/Pulsating
- Solar panel can be wall or spike mounted and recharged with the USB-A cable supplied
- Solar panel has 4m cable until first lamp then 0.6m spacing between each lamp
- Energy saving solar powered LED light
- Charge lasts up to 8 hours after full charge
- IP44 weather resistant



## WYE

### LED Solar Festoon Light Kit

 IP44 Rated
  2700K WW
  1.1kg
  Class 3

| Code     | Finish | Description                     | Power (w) | Colour (k) | Lumen (lm) | Charge Time | Batteries               | Dimensions       |
|----------|--------|---------------------------------|-----------|------------|------------|-------------|-------------------------|------------------|
| ZN-42229 | Black  | Wye LED Solar Festoon Light Kit | 5W        | 2700       | 60 (each)  | 8-10hrs     | 1 x 3.7V Li-ion 2200mAh | Overall L:1000mm |




## COASTAL

An extensive range of outdoor lighting constructed from polycarbonate with grade 316 stainless steel fixings. Domestic light fittings, designed with coastal areas in mind.

|                        |         |
|------------------------|---------|
| POST LIGHTS            | 152-153 |
| LANTERN                | 154-159 |
| BULKHEADS              | 160-167 |
| WALL                   | 168-173 |
| GUIDE LIGHTS           | 175-177 |
| GROUND                 | 179     |
| SECURITY & FLOODLIGHTS | 180-181 |

IP44

ADJUSTABLE  
HEIGHT

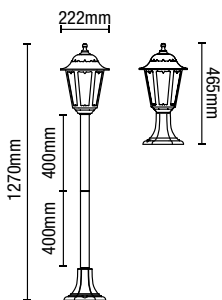

- Polycarbonate construction
- Corrosion resistant
- Three height options:  
1260mm/860mm/460mm



## BIANCA

Post Lantern




| Code         | Description                          | Lamp                    | Dimensions       |
|--------------|--------------------------------------|-------------------------|------------------|
| CZ-25148-BLK | Bianca Tall Post Lantern (3 Heights) | 1 x 10W max LED E27 GLS | W:222mm H:1270mm |

IP44



- Polycarbonate construction
- Corrosion resistant



# BIANCA


Triple Head Tall Post Lantern



| Code         | Description                          | Lamp                    | Dimensions        |
|--------------|--------------------------------------|-------------------------|-------------------|
| CZ-25149-BLK | Bianca Triple Head Tall Post Lantern | 3 x 10W max LED E27 GLS | Dia: 578 H:2216mm |



IP44

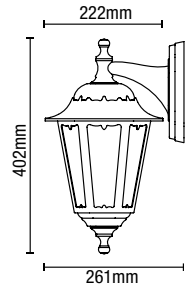

- Polycarbonate construction
- Corrosion resistant
- 2 alternate installation options

## BIANCA

### Up or Down Wall Lantern



IP44  
Rated



Class 2




0.73kg

| Code         | Description                    | Lamp                    | Dimensions                 |
|--------------|--------------------------------|-------------------------|----------------------------|
| CZ-25145-BLK | Bianca Up or Down Wall Lantern | 1 x 10W max LED E27 GLS | Proj:261mm W:222mm H:402mm |

IP44



MANUAL  
OVERRIDE

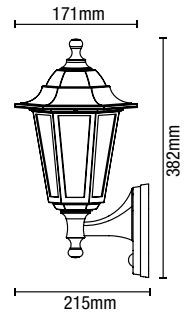

- Polycarbonate construction
- Corrosion resistant
- 6m Detection Distance
- Manual override function enables you to switch off PIR

## BIANCA

### Wall Lantern with PIR



IP44  
Rated



PIR  
Sensor



Class 2




0.84kg

| Code         | Description                  | Lamp                    | Dimensions                 |
|--------------|------------------------------|-------------------------|----------------------------|
| CZ-25150-BLK | Bianca Wall Lantern with PIR | 1 x 10W max LED E27 GLS | Proj:215mm W:171mm H:382mm |



**IP44**

- Polycarbonate construction
- Corrosion resistant
- Vintage style half lantern
- Available with or without PIR sensor
- 6m Detection Distance



## ATHENA

### Half Wall Lantern



IP44  
Rated



PIR  
Sensor




Class 2

| Code         | Sensor | Description         | Lamp                    | Dimensions                 |
|--------------|--------|---------------------|-------------------------|----------------------------|
| CZ-31748-BLK | -      | Athena Wall Lantern | 1 x 10W max LED E27 GLS | Proj:110mm W:180mm H:370mm |
| CZ-26743-BLK | PIR    |                     |                         |                            |



**IP44**

- ABS & PC construction
- Corrosion resistant



## JURA

### Wall Lantern



IP44  
Rated



Class 2

| Code         | Description       | Lamp                    | Dimensions                 |
|--------------|-------------------|-------------------------|----------------------------|
| CZ-35742-BLK | Jura Wall Lantern | 1 x 10W LED Max E27 GLS | Proj:185mm W:112mm H:215mm |




IP54



· Alternative mounting option

- Polycarbonate construction
- Corrosion resistant
- Available in black & anthracite
- Can be fitted either upward, downward or sideways

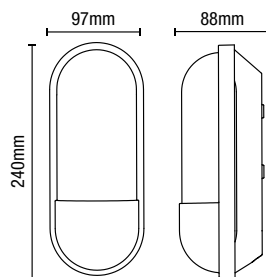

## PILULE

Wall Light



IP54  
Rated




Class 2



0.3kg

| Code          | Description       | Finish     | Lamp                       | Dimensions                  |
|---------------|-------------------|------------|----------------------------|-----------------------------|
| CZ-38639-BLK  | Pilule Wall Light | Black      | 1 x 10W max<br>LED E27 GLS | W:97mm H:240mm<br>Proj:88mm |
| CZ-38639-ANTH |                   | Anthracite |                            |                             |

IP44

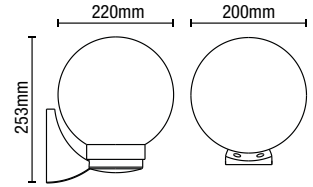

- Polycarbonate construction
- Corrosion resistant


## YORK

Globe Wall Lantern



| Code         | Description             | Lamp                    | Dimensions                 |
|--------------|-------------------------|-------------------------|----------------------------|
| CZ-31811-BLK | York Globe Wall Lantern | 1 x 10W max LED E27 GLS | Proj:220mm W:200mm H:253mm |

IP44

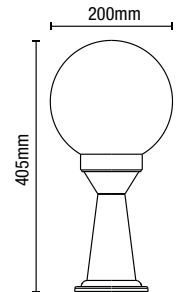

- Polycarbonate construction
- Corrosion resistant

## YORK

Globe Post Lantern




| Code         | Description             | Lamp                    | Dimensions        |
|--------------|-------------------------|-------------------------|-------------------|
| CZ-31812-BLK | York Globe Wall Lantern | 1 x 10W max LED E27 GLS | Dia:220mm H:405mm |

IP44



- Polycarbonate construction
- Corrosion resistant
- Contemporary styling
- Vandal resistant materials

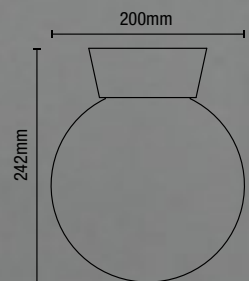

## YORK

Globe Porch Lantern



| Code         | Description              | Lamp                    | Dimensions        |
|--------------|--------------------------|-------------------------|-------------------|
| CZ-33461-BLK | York Globe Porch Lantern | 1 x 10W max LED E27 GLS | Dia:200mm H:242mm |



750  
Lumens

IP65


- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted (vertical or horizontal)

**CZ-34026-BLK**

- 8W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

**CZ-34027-BLK**

- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000

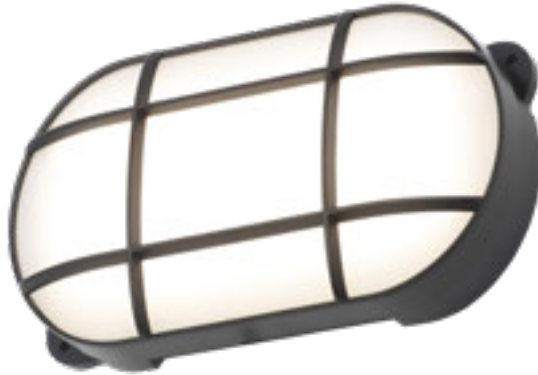

## CAPELLA

Oval Grid Bulkhead



IP65  
Rated

4000K  
CW


Class 2

| Code         | Size  | Description                | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|-------|----------------------------|-----------|------------|-----------------|-------------------|---------------------------|
| CZ-34026-BLK | Small | Capella Oval Grid Bulkhead | 8W        | 4000k      | 400             | 50                | H:115mm W:160mm Proj:57mm |
| CZ-34027-BLK | Large |                            | 15W       | 4000k      | 750             | 50                | H:135mm W:210mm Proj:57mm |

750  
Lumens

IP65

- Black PC / Opal diffuser
- Corrosion resistant
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000



## CAPELLA

Round Grid Bulkhead



IP65  
Rated

4000K  
CW


Class 2

| Code         | Description                 | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|-----------------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-34025-BLK | Capella Round Grid Bulkhead | 15W       | 4000k      | 750             | 50                | Proj:57mm Dia:165mm |



**IP44**

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



## MARS

Round Bulkhead


 IP44 Rated  
 Class 2  
 0.69kg

| Code         | Description         | Lamp                    | Dimensions           |
|--------------|---------------------|-------------------------|----------------------|
| CZ-20947-BLK | Mars Round Bulkhead | 1 x 10W max LED E27 GLS | Proj:100mm Dia:180mm |






**IP44**

- Durable polycarbonate construction with glass cover
- Corrosion resistant
- Protective grille



## PUCK

Oval Eyelid Bulkhead

 IP44 Rated  
 Class 2  
 1.06kg

| Code         | Description               | Lamp                    | Dimensions                 |
|--------------|---------------------------|-------------------------|----------------------------|
| CZ-25142-BLK | Puck Oval Eyelid Bulkhead | 1 x 10W max LED E27 GLS | Proj:110mm W:260mm H:150mm |



CZ-34023-BLK



Upto  
**750**  
Lumens

**IP65**



- Black PC / Opal diffuser
- Corrosion resistant
- Wall or ceiling mounted
- 6m Detection Distance

**CZ-33397-BLK**

- 8W LED module (SMD)
- K: 4000
- Lm: 400
- Lm/W: 50
- Hrs: 25,000

**CZ-34023-BLK**

- 15W LED module (SMD)
- K: 4000
- Lm: 750
- Lm/W: 50
- Hrs: 25,000

## CANO

LED Round Bulkhead



IP65  
Rated



4000K  
CW



PIR  
Sensor



Class 2

| Code         | Size  | Description             | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|-------|-------------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-33397-BLK | Small | Cano Round PIR Bulkhead | 8W        | 4000k      | 400             | 50                | Proj:57mm Dia:155mm |
| CZ-34023-BLK | Large | Cano Round PIR Bulkhead | 15W       | 4000k      | 750             | 50                | Proj:60mm Dia:195mm |








Upto  
**1200**  
Lumens



**IP65**



- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Push-fit connectors

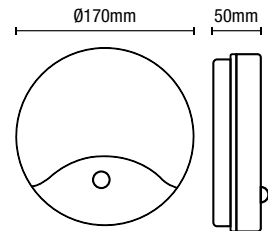

## TURUS

LED Round Bulkhead



| Code         | Sensor | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|--------|----------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-34014-BLK | -      | Turus Round Bulkhead | 15W       | CCT        | 1200            | 80                | Proj:50mm Dia:170mm |
| CZ-34015-BLK | PIR    | Turus Round Bulkhead | 15W       | CCT        | 840             | 56                | Proj:50mm Dia:170mm |



Upto  
**1200 Lumens**

**IP65**

**CCT**



- Black PC / Opal diffuser
- Corrosion resistant
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Available with or without PIR sensor
- 6m Detection Distance
- 15W LED module (SMD)
- Lm/W: 50
- Hrs: 25,000
- Push-fit connectors



# TURUS

## LED Oval Bulkhead

 IP65 Rated
  CCT
  PIR Sensor
  Class 2


| Code         | Sensor | Description         | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|--------|---------------------|-----------|------------|-----------------|-------------------|---------------------------|
| CZ-34016-BLK | -      | Turus Oval Bulkhead | 15W       | CCT        | 1200            | 80                | H:210mm W:115mm Proj:50mm |
| CZ-34017-BLK | PIR    | Turus Oval Bulkhead | 15W       | CCT        | 840             | 56                | H:210mm W:115mm Proj:50mm |

**590 Lumens**

**IP65**







- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 73
- Hrs: 20,000



# OXFORD

## Round LED Bulkhead

 IP65 Rated
  4000K CW
  Class 2
  0.45kg

| Code         | Description           | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|-----------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-31750-BLK | Oxford Round Bulkhead | 8W        | 4000k      | 590             | 73                | Proj:83mm Dia:213mm |

- Polycarbonate construction
- Corrosion resistant
- Can be wall or ceiling mounted

**CZ-31745-BLK**

- 15W LED module (SMD)
- Lm/W: 60
- Hrs: 20,000


**CZ-31743-BLK**

- 18W LED module (SMD)
- Lm/W: 70
- Hrs: 20,000




**Upto  
1245  
Lumens**

**IP65**



**RIPON**  
LED Bulkhead






| Code         | Size  | Description        | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|-------|--------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-31745-BLK | Small | Ripon LED Bulkhead | 15W       | 4000k      | 900             | 60                | Proj:44mm Dia:270mm |
| CZ-31743-BLK | Large | Ripon LED Bulkhead | 18W       | 4000k      | 1245            | 70                | Proj:44mm Dia:310mm |







**510  
Lumens**

**IP65**



- Polycarbonate and ABS construction
- Corrosion resistant
- Can be wall or ceiling mounted
- 8W LED module (SMD)
- Lm/W: 63
- Hrs: 20,000

**OXFORD**  
Oval LED Bulkhead


| Code         | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|--------------|----------------------|-----------|------------|-----------------|-------------------|----------------------------|
| CZ-31751-BLK | Oxford Oval Bulkhead | 8W        | 4000k      | 510             | 63                | H:142mm W: 213mm Proj:79mm |

**648**  
Lumens

**IP65**



- Polycarbonate and ABS construction
- Corrosion resistant
- 12W LED module (SMD)
- Lm/W: 64
- Hrs: 20,000

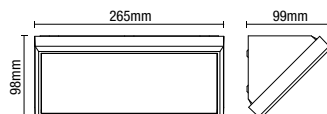

## LUTON

LED Wedge




| Code         | Description     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions               |
|--------------|-----------------|-----------|------------|-----------------|-------------------|--------------------------|
| CZ-31746-BLK | Luton LED Wedge | 12W       | 4000k      | 648             | 64                | Proj:99mm W:265mm H:98mm |

**IP65**

**1260**  
Lumens




- Corrosion resistant PC & ABS construction
- Adjustable sensitivity, hold time, lux level, standby time & standby dim level.
- Microwave & daylight Sensor



## DERBY

LED Wedge with Hi-Lo Dimmer




| Code         | Description                       | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|--------------|-----------------------------------|-----------|------------|-----------------|-------------------|----------------------------|
| CZ-31740-BLK | Derby LED Wedge with Hi-Lo Dimmer | 21W       | 4000k      | 1260            | 60                | Proj:139mm W:320mm H:138mm |



IP44

- ABS construction
- Corrosion resistant

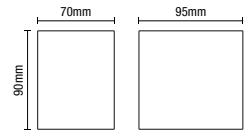

## IONA Downlight




| Code         | Description    | Lamp                | Dimensions              |
|--------------|----------------|---------------------|-------------------------|
| CZ-35704-BLK | Iona Downlight | 1 x 5W Max LED GU10 | Proj:90mm W:70mm H:95mm |



IP44

- ABS construction
- Corrosion resistant

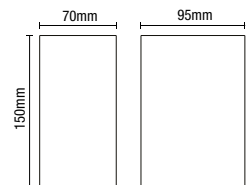


## IONA Up/Down Wall Light



| Code         | Description             | Lamp                | Dimensions               |
|--------------|-------------------------|---------------------|--------------------------|
| CZ-35705-BLK | Iona Up/Down Wall Light | 2 x 5W Max LED GU10 | Proj:95mm W:70mm H:150mm |

IP65



- Polycarbonate construction
- Corrosion resistant
- PIR sensor
- 6m Detection Distance

## NESO

Up/Down Wall Light with PIR



IP65  
Rated




PIR  
Sensor



Class 2

| Code         | Description             | Lamp                | Dimensions                |
|--------------|-------------------------|---------------------|---------------------------|
| CZ-31744-BLK | Neso Up/Down Wall Light | 2 x 7W Max LED GU10 | Proj:110mm W:63mm H:205mm |

IP65



- Polycarbonate construction
- Corrosion resistant

## NESO

Up/Down Wall Light



IP65  
Rated




Class 2

| Code            | Description             | Lamp                | Dimensions                |
|-----------------|-------------------------|---------------------|---------------------------|
| CZ-25144-BLK-65 | Neso Up/Down Wall Light | 2 x 7W Max LED GU10 | Proj:110mm W:81mm H:160mm |

IP65



- Polycarbonate construction
- Corrosion resistant

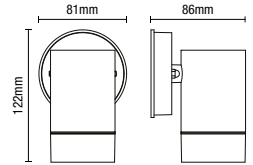

## NESO Downlight




| Code         | Description    | Lamp                | Dimensions               |
|--------------|----------------|---------------------|--------------------------|
| CZ-25143-BLK | Neso Downlight | 1 x 7W Max LED GU10 | Proj:86mm W:81mm H:122mm |



IP44



- Marine grade stainless steel (316) construction
- Corrosion resistant

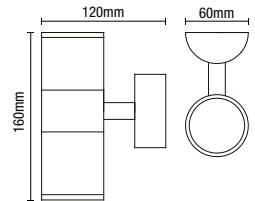

## ISLAY Up/Down Wall Light




| Code          | Description                 | Finish          | Lamp                   | Dimensions                      |
|---------------|-----------------------------|-----------------|------------------------|---------------------------------|
| CZ-29320-SST  | Islay<br>Up/Down Wall Light | Stainless Steel | 2 x 7W max<br>LED GU10 | H:160mm<br>W:70mm<br>Proj:120mm |
| CZ-29320-BLK  |                             | Black           |                        |                                 |
| CZ-29320-ANTH |                             | Anthracite      |                        |                                 |







- Marine grade stainless steel (316) construction
- Corrosion resistant
- PIR sensor
- Adjustable lux and timer
- Detection Angle: 90°
- Detection Distance: 7m



## ISLAY


### PIR Up/Down Wall Light



| Code          | Description                  | Finish          | Lamp                | Dimensions                      |
|---------------|------------------------------|-----------------|---------------------|---------------------------------|
| CZ-29319-SST  | Islay PIR Up/Down Wall Light | Stainless Steel | 2 x 7W max LED GU10 | H:143mm<br>W:60mm<br>Proj:125mm |
| CZ-29319-BLK  |                              | Black           |                     |                                 |
| CZ-29319-ANTH |                              | Anthracite      |                     |                                 |



- Marine grade stainless steel (316) construction
- Corrosion resistant

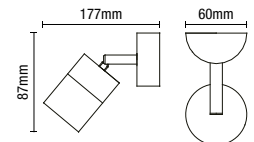

## ISLAY

### Spotlight




| Code          | Description     | Finish          | Lamp                | Dimensions                     |
|---------------|-----------------|-----------------|---------------------|--------------------------------|
| CZ-29321-SST  | Islay Spotlight | Stainless Steel | 1 x 7W max LED GU10 | H:87mm<br>W:60mm<br>Proj:177mm |
| CZ-29321-BLK  |                 | Black           |                     |                                |
| CZ-29321-ANTH |                 | Anthracite      |                     |                                |





**280  
Lumens**

**IP65**



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000

## BREEZ

### Surface Brick/Guide Light


IP65 Rated
 4000K CW
 Class 2
 0.19kg

| Code         | Description                     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions               |
|--------------|---------------------------------|-----------|------------|-----------------|-------------------|--------------------------|
| CZ-29192-ATR | Breez Surface Brick/Guide Light | 3W        | 4000k      | 290             | 93                | Proj:30mm W:210mm H:85mm |



**180  
Lumens**

**IP65**



- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 2W LED module (SMD)
- Lm/W: 90
- Hrs: 20,000

## BREEZ

### Surface Brick/Guide Light

IP65 Rated
 4000K CW
 Class 2
 0.16kg

| Code         | Description                     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions          |
|--------------|---------------------------------|-----------|------------|-----------------|-------------------|---------------------|
| CZ-29193-ATR | Breez Surface Brick/Guide Light | 2W        | 4000k      | 180             | 90                | Proj:30mm Dia:128mm |






**280  
Lumens**

**IP65**







- Polycarbonate construction
- Anthracite finish
- Corrosion resistant
- 3W LED module (SMD)
- Lm/W: 93
- Hrs: 20,000



## BREEZ

Surface Brick/Guide Light


 IP65 Rated
  4000K CW
  Class 2
  0.19kg

| Code         | Description                     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions               |
|--------------|---------------------------------|-----------|------------|-----------------|-------------------|--------------------------|
| CZ-29191-ATR | Breez Surface Brick/Guide Light | 3W        | 4000k      | 290             | 93                | Proj:30mm W:210mm H:85mm |



**590  
Lumens**

**IP65**



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000

## POOLE LED Up/Down Wall Light

IP65 Rated  
 4000K CW  
 Class 2  
 0.32kg

| Code         | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|------------------------------|-----------|------------|-----------------|-------------------|---------------------------|
| CZ-31749-BLK | Poole LED Up/Down Wall Light | 12.5W     | 4000k      | 590             | 47                | Proj:78mm W:230mm H:110mm |




**IP65**

**300  
Lumens**



- Polycarbonate construction
- Black finish with opal diffuser
- Corrosion resistant
- PIR sensor (option)
- 6m detection range
- 12.5W LED module (SMD)
- Lm/W: 47
- Hrs: 20,000



## POOLE LED Wall Downlight

PIR Sensor  
 IP65 Rated  
 4000K CW  
 Class 2  
 0.32kg

| Code         | Description              | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|--------------|--------------------------|-----------|------------|-----------------|-------------------|---------------------------|
| CZ-31752-BLK | Poole Downlight          | 6W        | 4000k      | 300             | 50                | Proj:51mm W:220mm H:113mm |
| CZ-31747-BLK | Poole Downlight with PIR | 6.5W      | 4000k      | 300             | 46                | Proj:51mm W:220mm H:113mm |






IP44



- Polycarbonate construction
- Corrosion resistant
- Detachable ground spike

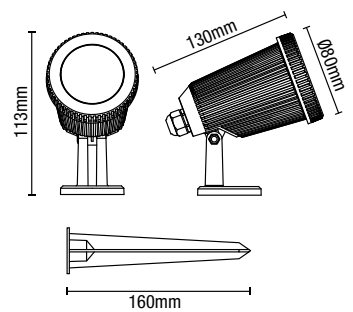

# WELLS

Dual Mount Ground/Spike Light

|  |  |  |   |
|--|--|--|---|
| <br>0.4M<br>Cable | <br>IP44<br>Rated | <br>Class 2 | <br>0.34kg |
|--|--|--|---|

| Code         | Description        | Lamp                | Dimensions                  |
|--------------|--------------------|---------------------|-----------------------------|
| CZ-31806-BLK | Wells Ground Light | 1 x 6W Max LED GU10 | Proj:130mm Dia:80mm H:273mm |

**NEW**

**Upto  
9000  
Lumens**

**IP65**



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



## VISBY

LED Slimline Floodlight



IP65  
Rated



180°  
Beam



6500K  
DW



0.5M  
Cable



Class 1

| Code         | Description                      | Power (w) | Total Flux (lm) | Weight | Dimensions                 |
|--------------|----------------------------------|-----------|-----------------|--------|----------------------------|
| CZ-41087-BLK | Visby LED<br>Slimline Floodlight | 20W LED   | 1500            | 0.24kg | H:90mm W:120mm Proj:95mm   |
| CZ-41088-BLK |                                  | 30W LED   | 2500            | 0.35kg | H:125mm W:190mm Proj:95mm  |
| CZ-41089-BLK |                                  | 50W LED   | 4100            | 0.59kg | H:155mm W:195mm Proj:120mm |
| CZ-41090-BLK |                                  | 100W LED  | 9000            | 0.87kg | H:190mm W:260mm Proj:120mm |

NEW

Upto  
4100  
Lumens

IP54



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



## TROSA

### LED Slimline Floodlight with PIR Sensor



PIR  
Sensor



IP54  
Rated



180°  
Beam



6500K  
DW



0.5M  
Cable



Class 1

| Code         | Description                                   | Power (w) | Total Flux (lm) | Weight | Dimensions                 |
|--------------|---|-----------|-----------------|--------|----------------------------|
| CZ-41091-BLK | Trosa LED Slimline Floodlight with PIR Sensor | 20W LED   | 1500            | 0.27kg | H:155mm W:120mm Proj:120mm |
| CZ-41092-BLK |   | 30W LED   | 2500            | 0.38kg | H:190mm W:160mm Proj:115mm |
| CZ-41093-BLK |   | 50W LED   | 4100            | 0.64kg | H:225mm W:195mm Proj:160mm |





ELECTRALITE

## COMMERCIAL

Great quality and installer friendly LED Commercial lighting, including our NEW LED range of tapes, downlights, bulkheads and battens.

|                       |         |
|-----------------------|---------|
| LED STRIP             | 184-193 |
| LED STRIP ACCESSORIES | 194-199 |
| UNDER CABINET         | 200     |
| LED BATTENS           | 201-203 |
| T-GRID LIGHTING       | 204-205 |
| RECESSED              | 206-213 |



# PROFESSIONAL 24V LED STRIPS



3M 200MP high performance acrylic adhesives used on all professional LED strips.

Our high grade 24V LED strips are ideal if you require 5 metres or more in a single length. Built from the highest specification components, they are consistent in brightness and reliability as there is less current. Therefore less voltage drop and less wiring is required. 24V strips or tapes are the choice of the professional installer.

## How to choose an LED strip

### 1. Choose LED type

Choose from White LED (single colour), or RGBW LED (16 selectable colour options). Available in a range of different variants to suit all applications.

### 2. Choose colour temperature

Choose from warm white, cool white and daylight white LED colour temperatures to suit your application. For RGB skip to step 3.

### 3. Choose installation environment

Select the protection you require for the installation environment. Choose from IP65 water resistant LED strip for wet areas or IP20 non water resistant LED strip for dry areas.

### 4. Choose profile

Designed to hold your LED strip, providing diffusion and protection. We offer a range of profiles, including surface mounted, recessed and corner mounted.

### 5. Choose your driver

Calculate the overall wattage of the LED strip to be used. Then select the driver that is higher in wattage than your LED strip (tape).

### 6. Accessories

We offer strip connectors and strip live-end connectors for our full range of LED strip, enabling you to cut and size your strip for any application or even extend LED strip where required.

### 7. Remote control receivers

Remote controlled receivers offer precise and user-friendly control over integral LED strip lighting, allowing you to change the colour and brightness of your room with the touch of a finger.



**560**  
Lumens

**6W**  
LED


**IP20**

**3M**  
200MP

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

**5m**  
**50m**

## IP20 8MM 6W LED Strip



| Code      | LED Colour     | Kelvin | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|----------------|--------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-34280 | Warm White     | 2700K  | 525           | 5.76W p/m       | 60           | SMD2835  | 8mm         | >80 | 5m          |
| ELA-34281 | Cool White     | 4000K  | 588           |                 |              |          |             |     |             |
| ELA-34282 | Daylight White | 6000K  | 569           |                 |              |          |             |     |             |
| ELA-34857 | Warm White     | 2700K  | 525           |                 |              |          |             |     | 50m         |
| ELA-34858 | Cool White     | 4000K  | 588           |                 |              |          |             |     |             |
| ELA-34859 | Daylight White | 6000K  | 569           |                 |              |          |             |     |             |





**560  
Lumens**

**6W  
LED**


**IP65**

**3M  
200MP**

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with receiver / controller (page .100)

**5m  
50m**

## IP65 8MM 6W LED Strip



| Code      | LED Colour     | Kelvin | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|----------------|--------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-34283 | Warm White     | 2700K  | 525           | 5.76W p/m       | 60           | SMD2835  | 8mm         | >80 | 5m          |
| ELA-34284 | Cool White     | 4000K  | 588           |                 |              |          |             |     |             |
| ELA-34285 | Daylight White | 6000K  | 569           |                 |              |          |             |     |             |
| ELA-34860 | Warm White     | 2700K  | 525           |                 |              |          |             |     | 50m         |
| ELA-34861 | Cool White     | 4000K  | 588           |                 |              |          |             |     |             |
| ELA-34862 | Daylight White | 6000K  | 569           |                 |              |          |             |     |             |



1000  
Lumens

12W  
LED

IP20

3M  
200MP



- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m  
50m

## IP20 10MM RGB 12W LED Strip



| Code      | LED Colour | IP Rating | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|------------|-----------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-34290 | RGB        | IP20      | 1000          | 11.52W p/m      | 60           | SMD5050  | 10mm        | >80 | 5m          |
| ELA-34871 |            |           |               |                 |              |          |             |     | 50m         |



1000  
Lumens

12W  
LED


IP65

3M  
200MP

- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB remote control & receiver (page .100)

5m  
50m

## IP65 10MM RGB 12W LED Strip



| Code      | LED Colour | IP Rating | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|------------|-----------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-34291 | RGB        | IP65      | 1000          | 11.52W p/m      | 60           | SMD5050  | 10mm        | >80 | 5m          |
| ELA-34872 |            |           |               |                 |              |          |             |     | 50m         |







**1000  
Lumens**

**19.2W  
LED**

**IP65**


**3M  
200MP**



- 24V to avoid voltage drop on longer runs
- IP65 for use outdoor
- 3M self-adhesive backing
- Strips can be cut, linked or joined at copper contacts
- Requires LED driver
- 30,000 Hours lifespan
- Dimmable with RGB/CCT remote control & receiver (page .100)

**5m**  
**50m**

## IP65 12MM RGB/CCT 19.2W LED Strip



| Code      | LED Colour | IP Rating | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|------------|-----------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-34296 | RGB/CCT    | IP65      | 1000          | 19.2W p/m       | 60           | SMD5050  | 12mm        | >80 | 5m          |
| ELA-34873 |            |           |               |                 |              |          |             |     | 50m         |







**915**  
Lumens

**12W**  
LED

**IP20**


**3M**  
9080A

**5m**  
**50m**

- 24V to avoid voltage drop on longer runs
- IP20 for use indoor
- 3M self-adhesive backing
- Strips can be cut every 62.5mm
- More flexible than SMD LED strip
- Spot free lighting array
- Very high colour rendering index producing true light colour RA>90. RA90
- Dimmable with receiver (page .100)




## COB IP20 8MM 12W LED Strip



| Code      | LED Colour | Kelvin | Lumen / Metre | Power W / Metre | LEDs / Metre | LED Type | Strip Width | CRI | Roll Length |
|-----------|------------|--------|---------------|-----------------|--------------|----------|-------------|-----|-------------|
| ELA-35750 | Warm White | 3000K  | 896           | 12W p/m         | 512          | COB      | 8mm         | >90 | 5m          |
| ELA-35751 | Cool White | 4000K  | 934           |                 |              |          |             |     | 50m         |
| ELA-35752 | Warm White | 3000K  | 896           |                 |              |          |             |     | 50m         |
| ELA-35753 | Cool White | 4000K  | 934           |                 |              |          |             |     | 50m         |

# ALUMINIUM PROFILES

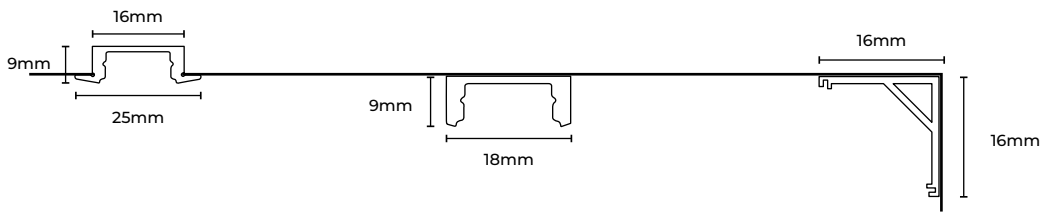

Recessed

Surface-mount

Corner



| Code      | Description                                | Dimensions                |
|-----------|--|---------------------------|
| ELA-34308 | Aluminium Recessed Profile                 | L:2000mm W:25mm Proj:9mm  |
| ELA-34306 | Aluminium Surface-mount Profile            | L:2000mm W:18mm Proj:9mm  |
| ELA-34307 | Aluminium 45° Corner Surface-mount Profile | L:2000mm W:16mm Proj:16mm |

# LED DRIVERS

## Constant Voltage

ELA-36974



ELA-36975



ELA-34302



ELA-34301



ELA-34303



ELA-34300



ELA-34304



ELA-34305



| Code      | Description                               | Weight | Dimensions            |
|-----------|---|--------|-----------------------|
| ELA-36974 | LED Driver Constant Voltage 24V 10W       | -      | -                     |
| ELA-36975 | LED Driver Constant Voltage 24V 20W       | -      | -                     |
| ELA-34300 | LED Driver Constant Voltage 24V 36W       | 0.13kg | H:48mm W:45mm L:140mm |
| ELA-34301 | LED Driver Constant Voltage 24V 60W       | 0.17kg | H:20mm W:40mm L:140mm |
| ELA-34302 | LED Driver Constant Voltage 24V 100W      | 0.24kg | H:28mm W:61mm L:178mm |
| ELA-34303 | IP67 LED Driver Constant Voltage 24V 60W  | 0.42kg | H:30mm W:58mm L:200mm |
| ELA-34304 | IP67 LED Driver Constant Voltage 24V 150W | 0.81kg | H:58mm W:82mm L:260mm |
| ELA-34305 | IP67 LED Driver Constant Voltage 24V 200W | 0.81kg | H:58mm W:82mm L:260mm |



# LED RECEIVERS

## Remote Control

ELA-34286



ELA-34287



- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour LED strip
- Smooth dimming and switch without any flickering

- Remote and controller are RF (radio frequency) not IR (infra-red)
- Compatible with single colour/RGB/RGBW LED strip
- Smooth dimming and switch without any flickering



ELA-34292



ELA-34293

| Code      | Description                               | Dimensions            |
|-----------|---|-----------------------|
| ELA-34286 | 1 Channel LED Receiver                    | H:20mm W:37mm L:115mm |
| ELA-34287 | 1 Zone Programmable Remote Control        | H:9mm W:59mm L:107mm  |
| ELA-34292 | 4 Channel RGB LED Receiver                | H:20mm W:37mm L:115mm |
| ELA-34293 | 4 Zones Programmable RGB/W Remote Control | H:9mm W:59mm L:107mm  |

# RGB/CCT

## 5 in 1 Wi-Fi DC Controller



| Code      | Description                        | Dimensions            |
|-----------|------------------------------------|-----------------------|
| ELA-38126 | RGB/CCT 5 in 1 Wi-Fi DC Controller | L:120mm W:44mm H:27mm |

# LED STRIP CONNECTORS

Solder Free

**NEW**  
FOR  
2023



ELA-41718



ELA-41719



ELA-41721



ELA-41720



ELA-41722



ELA-41723



ELA-41725



ELA-41724



ELA-41726



ELA-41727



ELA-41729



ELA-41728

| Code      | Description                                     | Fits       |
|-----------|---|------------|
| ELA-41718 | Wire To Strip Connector 2PIN 8MM PCB            | 8mm Strip  |
| ELA-41719 | Strip To Strip Connector Easy Fit 2PIN 8MM PCB  |            |
| ELA-41720 | Strip To Wire to Strip Connector 2PIN 8MM PCB   |            |
| ELA-41721 | Wire To Strip Connector Easy Fit 2PIN 8MM PCB   |            |
| ELA-41722 | Wire To Strip Connector 4PIN 10MM PCB           | 10mm Strip |
| ELA-41723 | Strip To Strip Connector Easy Fit 4PIN 10MM PCB |            |
| ELA-41724 | Strip To Wire To Strip Connector 4PIN 10MM PCB  |            |
| ELA-41725 | Wire To Strip Connector Easy Fit 4PIN 10MM PCB  |            |
| ELA-41726 | Wire To Strip Connector 6PIN 12MM PCB           | 12mm Strip |
| ELA-41727 | Strip To Strip Connector Easy Fit 6PIN 12MM PCB |            |
| ELA-41728 | Strip To Wire To Strip Connector 6PIN 12MM PCB  |            |
| ELA-41729 | Wire To Strip Connector Easy Fit 6PIN 12MM PCB  |            |

**NEW**

**Upto  
1700  
Lumens**



**NO  
DRIVER  
REQ.**


Cool White

Natural White

Warm White

Ultra slim LED under cabinet lights ideal for kitchen, cabinet, cove lighting or other applications. Linkable end-to-end or using link leads available separately.

- White PC body with opal diffuser
- Switchable between 3000K/4000K/6000K
- ON/OFF rocker switch
- No driver required
- C7 cable type
- Supplied with 2m power lead
- Versatile and simple to install
- Can be mounted horizontally or vertically
- Energy efficient and long life

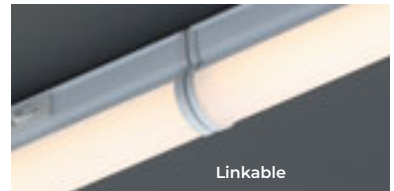

Linkable



## BODHI

CCT Adjustable Under Cabinet Link Light



CCT



2M  
Cable



Class 2

| Code      | Description            | Power (w) | Colour (k) | Total Flux (lm) | Weight  | Length | Dimensions                |
|-----------|------------------------|-----------|------------|-----------------|---------|--------|---------------------------|
| ELA-41712 | Bodhi Link Light       | 5W LED    | 3 CCT      | 500             | 0.34kg  | 312mm  | L:312mm W:22mm Proj:36mm  |
| ELA-41713 |                        | 9W LED    | 3 CCT      | 900             | 0.172kg | 611mm  | L:611mm W:22mm Proj:36mm  |
| ELA-41714 |                        | 14W LED   | 3 CCT      | 1300            | 0.210kg | 911mm  | L:911mm W:22mm Proj:36mm  |
| ELA-41715 |                        | 18W LED   | 3 CCT      | 1700            | 0.246kg | 1210mm | L:1210mm W:22mm Proj:36mm |
| ELA-21665 | Bodhi Link Lead 8 Type | -         | -          | -               | 0.30kg  | 500mm  | Length: 500mm             |
| ELA-21666 |                        | -         | -          | -               | 0.52kg  | 1000mm | Length: 1000mm            |

Upto  
**1200**  
Lumens

**NO  
DRIVER  
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

# RENO

LED Batten



Class 2

| Code      | Description | Power (w) | Colour (k) | Total Flux (lm) | Length | Dimensions                |
|-----------|-------------|-----------|------------|-----------------|--------|---------------------------|
| CUL-30700 |             | 30W LED   | 3000       | 2690            | 900mm  | L:900mm W:75mm Proj:24mm  |
| CUL-30702 |             | 40W LED   | 3000       | 3600            | 1200mm | L:1200mm W:75mm Proj:24mm |
| CUL-30699 |             | 20W LED   | 4000       | 1850            | 600mm  | L:600mm W:75mm Proj:24mm  |
| CUL-30701 |             | 30W LED   | 4000       | 2730            | 900mm  | L:900mm W:75mm Proj:24mm  |
| CUL-30703 |             | 40W LED   | 4000       | 3650            | 1200mm | L:1200mm W:75mm Proj:24mm |

Upto  
**6900**  
Lumens

**NO  
DRIVER  
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

## RENO

LED Batten



Class 2

| Code      | Description     | Power (w) | Colour (k) | Total Flux (lm) | Length | Dimensions                |
|-----------|-----------------|-----------|------------|-----------------|--------|---------------------------|
| CUL-30704 | Reno LED Batten | 60W LED   | 3000       | 5200            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30707 |                 | 80W LED   | 3000       | 6600            | 1800mm | L:1800mm W:75mm Proj:24mm |
| CUL-30705 |                 | 60W LED   | 4000       | 5300            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30708 |                 | 80W LED   | 4000       | 6700            | 1800mm | L:1800mm W:75mm Proj:24mm |
| CUL-30706 |                 | 60W LED   | 6000       | 5500            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30709 |                 | 80W LED   | 6000       | 6900            | 1800mm | L:1800mm W:75mm Proj:24mm |



## RENO

Suspension Kit

| Code      | Description            | Dimensions |
|-----------|------------------------|------------|
| CUL-30710 | Reno 1m Suspension Kit | L:1000mm   |
| CUL-30711 | Reno 2m Suspension Kit | L:2000mm   |




# GAMMA LED T-GRID LIGHTING SOLUTIONS


The Gamma LED T-Grid is an innovative lighting product solution for T-Grid suspension ceilings. Engineered to work with 15mm, 24mm and 25mm T-Grid ceiling structures in order to minimise building materials and waste. Also helping reduce installation costs and improve ceiling appearance.

## Works with different tile edges:

15mm T-Grid Bar





24mm T-Grid Bar





## Remarkable installation savings:


### Installation steps:


- 


1 Tap the dot on the face.
- 

2 Release the T-Bar hanger lock
- 

3 Install the T-Grid to the T-Bar
- 

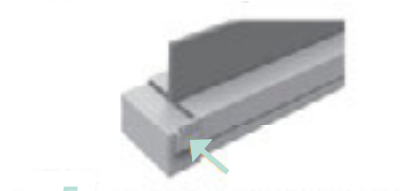
4 Lock the T-Bar ranger
- 

5 Place the power cable alongside T-Bar
- 

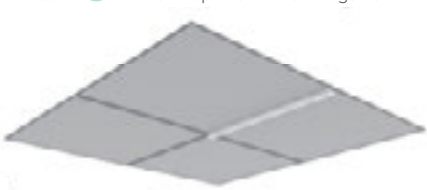6 Put the ceiling tiles back into ceiling
- 

7 Installation can be completed within 1 minute

**Upto  
3700  
Lumens**

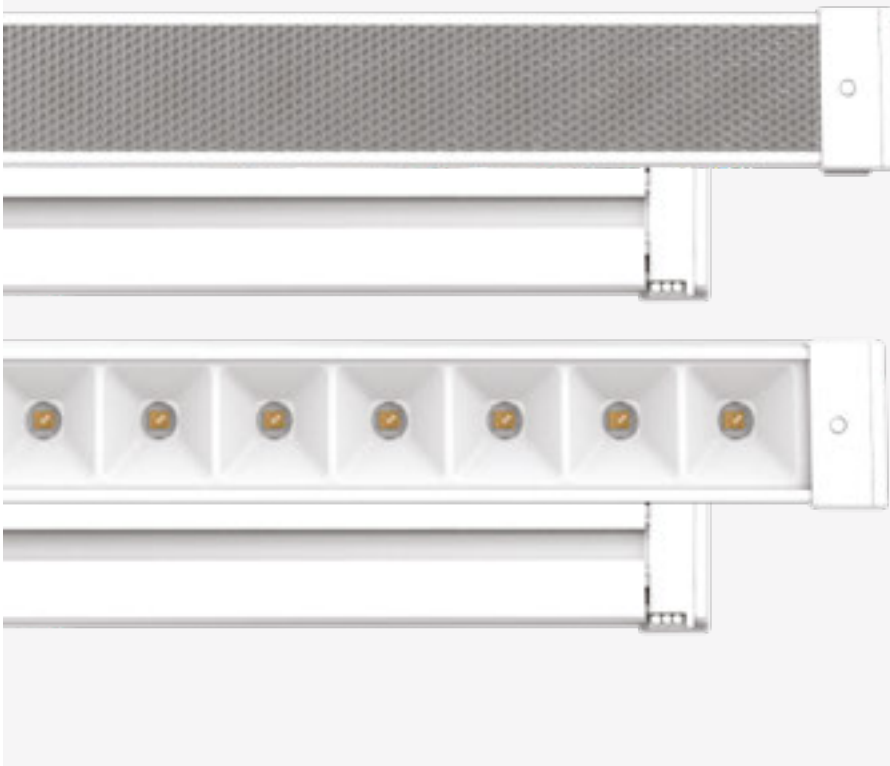

- An innovative lighting fixture that takes the place of LED panels
- Engineered to work with 15mm , 24mm & 25mm T-Grid ceilings
- Simple to install (Up to 60% faster Installation)
- Reduces installation costs
- Even light distribution
- Improves ceiling appearance



## GAMMA

### LED T-Grid Lighting



| Code      | Description                | PCS    | Finish    | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | CRI | Length |
|-----------|----------------------------|--------|-----------|------------|-----------------|-------------------|-----|--------|
| ELA-35745 | 14W T-Grid Kit with Driver | 2 Pack | Lens      | 4000k      | 1764            | 126               | >80 | 580mm  |
| ELA-35743 | 15W T-Grid Kit with Driver | 2 Pack | Prismatic | 4000k      | 1545            | 103               | >80 |        |
| ELA-35746 | 28W T-Grid Kit with Driver | 1 Pack | Lens      | 4000k      | 3696            | 132               | >80 | 1180mm |
| ELA-35744 | 30W T-Grid Kit with Driver | 1 Pack | Prismatic | 4000k      | 2970            | 99                | >80 |        |



NEW

700  
Lumens

IP65

FAST  
FIT

CCT



- Dimmable
- Fire rated
- Fast fit terminals
- 7W LED module (COB)
- 3000/4000/6000K (CCT)

- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



## EDEN

IP65 Tiltable Fire-rated Downlight



| Code           | Pack Size | Finish      | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|----------------|-----------|-------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-41111-WHT  | Single    | White       | 7W        | 700             | 100               | 3 CCT      | Dia:87mm<br>H:30mm<br>Cutout:70mm |
| SPA-41111-BLK  |           | Black       |           |                 |                   |            |                                   |
| SPA-41111-CHR  |           | Chrome      |           |                 |                   |            |                                   |
| SPA-41111-SBRS |           | Satin Brass |           |                 |                   |            |                                   |

**NEW**

**900  
Lumens**

**4 CCT**

**FAST  
FIT**



- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K 3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



# JENN

Anti-glare Fire-rated Downlight



| Code              | Finish      | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|-------------------|-------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-41112-BLK/WHT | Black/White | 8W        | 900             | 112.5             | 4 CCT      | Dia:84mm<br>H:65mm<br>Cutout:70mm |

**500  
Lumens**

**IP65**

**FAST  
FIT**










- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



# COMO

## IP65 Tiltable Fire-rated Downlight


-   
Fire-rated
-   
IP65  
Rated
-   
60°  
Beam
-   
70mm  
Cut-out
-   
4000K  
CW
-   
Class 2
-   
0.15kg

| Code                 | Pack Size         | Finish         | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|----------------------|-------------------|----------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-38570/38571-ACOP | 3 Pack/<br>Single | Antique Copper | 5W        | 500             | 100               | 4000       | Dia:87mm<br>H:30mm<br>Cutout:70mm |
| SPA-38570/38571-BCHR |                   | Black Chrome   |           |                 |                   |            |                                   |
| SPA-38570/38571-CHR  |                   | Chrome         |           |                 |                   |            |                                   |
| SPA-38570/38571-MWHT |                   | Matt White     |           |                 |                   |            |                                   |
| SPA-38570/38571-SBLK |                   | Satin Black    |           |                 |                   |            |                                   |
| SPA-38570/38571-SBRS |                   | Satin Brass    |           |                 |                   |            |                                   |
| SPA-38570/38571-SNIC |                   | Satin nickel   |           |                 |                   |            |                                   |






- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000

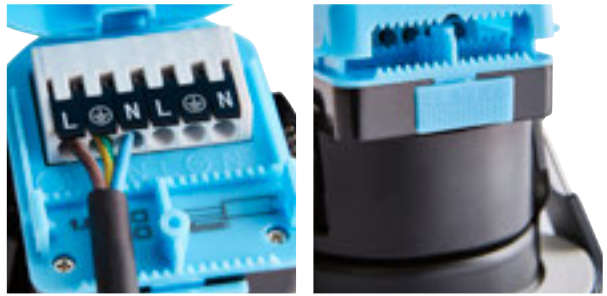

## RHOM

### IP65 Fixed Fire-rated Downlight



| Code           | Pack Size | Finish         | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|----------------|-----------|----------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-38572-ACOP | Single    | Antique Copper | 8W        | 900             | 112.5             | CCT        | Dia:87mm<br>H:65mm<br>Cutout:70mm |
| SPA-38572-BCHR |           | Black Chrome   |           |                 |                   |            |                                   |
| SPA-38572-CHR  |           | Chrome         |           |                 |                   |            |                                   |
| SPA-38572-MWHT |           | Matt White     |           |                 |                   |            |                                   |
| SPA-38572-SBLK |           | Satin Black    |           |                 |                   |            |                                   |
| SPA-38572-SBRS |           | Satin Brass    |           |                 |                   |            |                                   |
| SPA-38572-SNIC |           | Satin nickel   |           |                 |                   |            |                                   |

**FAST  
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

## YATE

Adjustable Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27466-WHT  | White        | IP20      | 1 x 7W max<br>LED GU10 | Ø85mm  | Dia:93mm Proj:120mm<br>H:135mm |
| ELA-27466-CHR  | Chrome       |           |                        |        |                                |
| ELA-27466-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27466-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27466-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27466-SBRS | Satin Brass  |           |                        |        |                                |

**FAST  
FIT**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

## YATE

### Fixed Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27465-WHT  | White        | IP20      | 1 x 7W max<br>LED GU10 | Ø72mm  | Dia:80mm Proj:115mm<br>H:135mm |
| ELA-27465-CHR  | Chrome       |           |                        |        |                                |
| ELA-27465-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27465-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27465-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27465-SBRS | Satin Brass  |           |                        |        |                                |

**FAST  
FIT**

**IP65**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

• Fast-fit connector box

# YATE

## Fixed IP65 Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27467-WHT  | White        | IP65      | 1 x 7W max<br>LED GU10 | Ø85mm  | Dia:80mm Proj:115mm<br>H:125mm |
| ELA-27467-CHR  | Chrome       |           |                        |        |                                |
| ELA-27467-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27467-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27467-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27467-SBRS | Satin Brass  |           |                        |        |                                |



## BATHROOM

A beautiful range of decorative lighting and mirrors, designed to brighten any bathroom.

|               |         |
|---------------|---------|
| CEILING/WALL  | 216-258 |
| SPOTLIGHTS    | 259-261 |
| FLUSH         | 262-268 |
| RECESSED      | 269-277 |
| WALL          | 278-282 |
| MIRRORS       | 283-293 |
| SMART TOILETS | 294-295 |



NEW  
FOR  
2023

IP44



- Stainless steel and glass construction
- Available in 3 finishes
- Ceiling cup fits into recess at top of shade to enable fitting to be used as a semi-flush

## TULIP

Glass Pendant/Semi-Flush



IP44  
Rated



Class 2



1.4kg

| Code           | Finish      | Description               | Lamp                       | Dimensions   |
|----------------|-------------|---------------------------|----------------------------|--|
| SPA-41223-CHR  | Chrome      | Bryn Glass Tulip Pendant  | 1 x 10W max LED<br>E27 GLS | Max Height: 1295mm<br>Min Height: 295mm<br><br>Dia:205mm |
| SPA-41224-SBRS | Satin Brass | Rhys Glass Tulip Pendant  |                            |  |
| SPA-41225-SBLK | Satin Black | Dylan Glass Tulip Pendant |                            |  |

**NEW**  
FOR  
2023

**900**  
Lumens

**IP44**



- Steel construction with opal glass shade
- Available in 3 finishes
- 12W LED module (SMD)
- Lm/W: 75
- CRI: 80



## OPIE

LED Glass Dome Flush



IP44  
Rated



4000K  
CW



Class 1




1.3kg


| Code           | Finish       | Description               | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           |
|----------------|--------------|---------------------------|-----------|------------|-----------------|----------------------|
| SPA-41694-MBLK | Matt Black   | Opie LED Glass Dome Flush | 12W       | 4000k      | 900             | H:110mm<br>Dia:300mm |
| SPA-41694-CHR  | Chrome       |                           |           |            |                 |                      |
| SPA-41694-SNIC | Satin Nickel |                           |           |            |                 |                      |

280  
Lumens

IP44

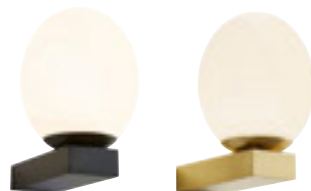

- Aluminium construction with opal glass shade
- Available in 3 finishes
- 3W LED module (SMD)
- Lm/W: 93
- CRI: 80



## AGIOS

LED Bathroom Wall Light



IP44  
Rated



Non  
Dimmable




4000K  
CW



Class 1



0.6kg




Available in  
3 colour options

| Code           | Finish         | Description               | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|----------------|----------------|---------------------------|-----------|------------|-----------------|----------------------------|
| SPA-38573-TBLK | Textured Black | Agios Bathroom Wall Light | 3W        | 4000k      | 280             | H:190mm W:130mm Proj:180mm |
| SPA-38573-CHR  | Chrome         |                           |           |            |                 |                            |
| SPA-38573-SBRS | Satin Brass    |                           |           |            |                 |                            |

IP44



- Contemporary bathroom wall light
- Available in 3 finishes



## THIVA

Bathroom Wall Light




IP44  
Rated



Class 1



0.5kg



Available in  
3 colour options


| Code           | Finish         | Description               | Lamp              | Dimensions                 |
|----------------|----------------|---------------------------|-------------------|----------------------------|
| SPA-38576-TBLK | Textured Black | Thiva Bathroom Wall Light | 1 x 3W max LED G9 | H:167mm W:160mm Proj:167mm |
| SPA-38576-CHR  | Chrome         |                           |                   |                            |
| SPA-38576-SBRS | Satin Brass    |                           |                   |                            |



400 Lumens

IP44

- Crackle effect diffuser
- 5W LED module (SMD)
- Lm/W: 80
- CRI: 80



## RHODES

LED Bathroom Wall Light




| Code          | Finish | Description           | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|--------|-----------------------|-----------|------------|-----------------|----------------------------|
| SPA-36300-CHR | Chrome | Rhodes LED Wall Light | 5W        | 4000k      | 400             | H:220mm W:100mm Proj:140mm |



800 Lumens

IP44

- Crackle effect diffuser
- 10W LED module (SMD)
- K: 4000
- Lm: 800
- Lm/W: 80
- CRI: 80

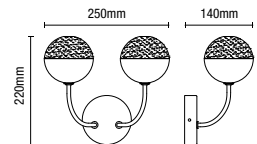

## RHODES


LED Bathroom 2 Light Wall Light



| Code          | Finish | Description                   | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                 |
|---------------|--------|-------------------------------|-----------|------------|-----------------|----------------------------|
| SPA-36301-CHR | Chrome | Rhodes LED 2 Light Wall Light | 10W       | 4000k      | 800             | H:220mm W:250mm Proj:140mm |

500  
Lumens

IP44



· Matching ceiling lights available

## EDESSA LED Wall Light



IP44  
Rated



4000K  
CW



Class 1




0.5kg

| Code          | Finish | Description                   | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                |
|---------------|--------|-------------------------------|-----------|------------|-----------------|---------------------------|
| SPA-36309-CHR | Chrome | Edessa LED 2 Light Wall Light | 10W       | 4000k      | 500             | H:320mm W:225mm Proj:50mm |

Upto  
1200  
Lumens

IP44

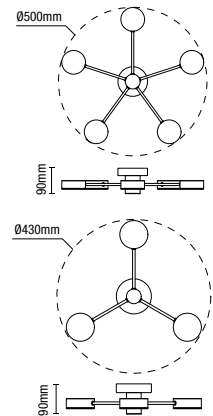

· Matching wall light available

## EDESSA LED Ceiling Light



IP44  
Rated



4000K  
CW




Class 1

| Code          | Finish | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions          | Weight |
|---------------|--------|------------------------------|-----------|------------|-----------------|---------------------|--------|
| SPA-36310-CHR | Chrome | Edessa 3 Light Ceiling Light | 15W       | 4000k      | 800             | H:90mm<br>Dia:430mm | 0.7kg  |
| SPA-36311-CHR | Chrome | Edessa 5 Light Ceiling Light | 25W       | 4000k      | 1200            | H:90mm<br>Dia:500mm | 1kg    |



Upto  
**1400 Lumens**  
**IP44**

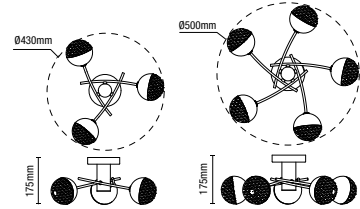

- Crackle effect diffuser
- Matching wall light available

## RHODES


LED Ceiling Light

IP44 Rated  
 4000K CW  
 Class 1

| Code          | Finish | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           | Weight |
|---------------|--------|------------------------------|-----------|------------|-----------------|----------------------|--------|
| SPA-36302-CHR | Chrome | Rhodes 3 Light Ceiling Light | 15W       | 4000k      | 900             | H:175mm<br>Dia:430mm | 1.15kg |
| SPA-36303-CHR | Chrome | Rhodes 5 Light Ceiling Light | 24W       | 4000k      | 1400            | H:175mm<br>Dia:500mm | 1.55kg |



**IP44**

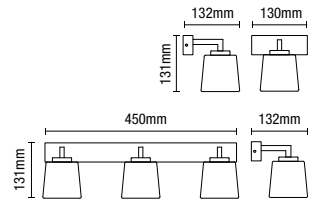

- Contemporary bathroom wall light
- Steel construction with glass opal shades

## PARGA

Bathroom Wall Light

IP44 Rated  
 Class 1


| Code          | Finish | Description              | Lamp              | Dimensions                    | Weight |
|---------------|--------|--------------------------|-------------------|-------------------------------|--------|
| SPA-38574-CHR | Chrome | Parga 1 Light Wall Light | 1 x 3W max LED G9 | H:131mm W:130mm<br>Proj:132mm | 0.35kg |
| SPA-38575-CHR | Chrome | Parga 3 Light Wall Light | 3 x 3W max LED G9 | H:131mm W:450mm<br>Proj:132mm | 1.05kg |



IP44



- Contemporary bathroom wall light
- Diamond cut glass designed shades



## VOLOS

Wall Light




| Code          | Finish | Description              | Lamp              | Dimensions                 |
|---------------|--------|--------------------------|-------------------|----------------------------|
| SPA-35808-CHR | Chrome | Volos 2 Light Wall Light | 2 x 3W max LED G9 | H:330mm W:150mm Proj:105mm |

IP44



- Contemporary bathroom ceiling light
- Diamond cut glass designed shades

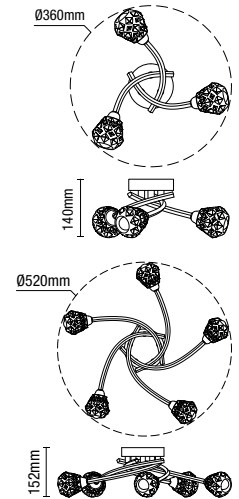

## VOLOS


Ceiling Light



| Code          | Finish | Description                 | Lamp              | Dimensions        | Weight |
|---------------|--------|-----------------------------|-------------------|-------------------|--------|
| SPA-35782-CHR | Chrome | Volos 3 Light Ceiling Light | 3 x 3W max LED G9 | H:140mm Dia:360mm | 1.15kg |
| SPA-35783-CHR | Chrome | Volos 5 Light Ceiling Light | 5 x 3W max LED G9 | H:152mm Dia:520mm | 2.05kg |



IP44



- Available in satin brass/champagne glass or chrome/smoked glass

## PATRAS

### 3 Light Plate Ceiling Light



IP44  
Rated



Class 2




1.05kg

| Code            | Finish                | Description                              | Lamp                 | Dimensions           |
|-----------------|-----------------------|--|----------------------|----------------------|
| SPA-35809-CHAMP | Satin Brass/Champagne | Patras<br>3 Light Plate<br>Ceiling Light | 3 x 3W max<br>LED G9 | H:115mm<br>Dia:230mm |
| SPA-35809-CHR   | Chrome/Smoke          |  |                      |                      |



IP44

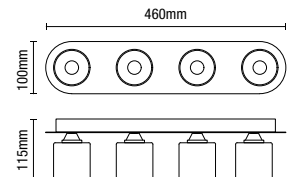

- Available in satin brass/champagne glass or chrome/smoked glass

## PATRAS

### 4 Light Bar Ceiling Light



IP44  
Rated




Class 2



1.35kg

| Code            | Finish                | Description                            | Lamp                 | Dimensions                    |
|-----------------|-----------------------|--|----------------------|-------------------------------|
| SPA-35810-CHAMP | Satin Brass/Champagne | Patras<br>4 Light Bar<br>Ceiling Light | 4 x 3W max<br>LED G9 | H:115mm W:460mm<br>Proj:100mm |
| SPA-35810-CHR   | Chrome/Smoke          |  |                      |                               |

IP44



- Available in satin brass/champagne glass or chrome/smoked glass


## PATRAS

1 Light Wall Light



| Code            | Finish                | Description                     | Lamp                 | Dimensions                    |
|-----------------|-----------------------|---------------------------------|----------------------|-------------------------------|
| SPA-35811-CHAMP | Satin Brass/Champagne | Patras<br>1 Light<br>Wall Light | 1 x 3W max<br>LED G9 | H:185mm W:110mm<br>Proj:135mm |
| SPA-35811-CHR   | Chrome/Smoke          |                                 |                      |                               |

IP44

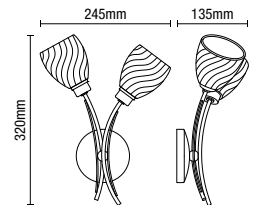

- Twisted style glass shades

## VERIA

2 Light Wall Light




| Code           | Finish            | Description                    | Lamp                 | Dimensions                    |
|----------------|-------------------|--------------------------------|----------------------|-------------------------------|
| SPA-35830-SBRS | Satin Brass/Clear | Veria<br>2 Light<br>Wall Light | 2 x 3W max<br>LED G9 | H:320mm W:245mm<br>Proj:135mm |

IP44



- Twisted style glass shades
- Available in satin brass or chrome



## VERIA

### 3 Light Ceiling Light




| Code           | Finish            | Description                 | Lamp              | Dimensions           |
|----------------|-------------------|-----------------------------|-------------------|----------------------|
| SPA-35828-SBRS | Satin Brass/Clear | Veria 3 Light Ceiling Light | 3 x 3W max LED G9 | H:170mm<br>Dia:390mm |
| SPA-35828-CHR  | Chrome/Smoke      |                             |                   |                      |

IP44



- Twisted style glass shades
- Available in satin brass or chrome




## VERIA

### 5 Light Ceiling Light



| Code           | Finish            | Description                 | Lamp              | Dimensions           |
|----------------|-------------------|-----------------------------|-------------------|----------------------|
| SPA-35829-SBRS | Satin Brass/Clear | Veria 5 Light Ceiling Light | 3 x 3W max LED G9 | H:195mm<br>Dia:480mm |
| SPA-35829-CHR  | Chrome/Smoke      |                             |                   |                      |

IP44



• Available in chrome or satin brass

## LINDOS

### 3 Light Ceiling Light



IP44  
Rated




Class 1



1.0kg

| Code           | Finish           | Description                  | Lamp              | Dimensions           |
|----------------|------------------|------------------------------|-------------------|----------------------|
| SPA-35836-CHR  | Chrome/Smoke     | Lindos 3 Light Ceiling Light | 3 x 3W max LED G9 | H:265mm<br>Dia:390mm |
| SPA-35836-SBRS | Satin Brass/Opal |                              |                   |                      |

IP44



• Available in chrome or satin brass

## LINDOS

### 5 Light Ceiling Light



IP44  
Rated



Class 1




1.0kg

| Code           | Finish           | Description                  | Lamp              | Dimensions           |
|----------------|------------------|------------------------------|-------------------|----------------------|
| SPA-35837-CHR  | Chrome/Smoke     | Lindos 5 Light Ceiling Light | 5 x 3W max LED G9 | H:275mm<br>Dia:465mm |
| SPA-35837-SBRS | Satin Brass/Opal |                              |                   |                      |

IP44



• Available in chrome or satin brass



# LINDOS


2 Light Wall Light

IP44 Rated | Class 1 | 0.4kg

| Code           | Finish           | Description               | Lamp              | Dimensions                 |
|----------------|------------------|---------------------------|-------------------|----------------------------|
| SPA-35838-CHR  | Chrome/Smoke     | Lindos 2 Light Wall Light | 2 x 3W max LED G9 | H:325mm W:210mm Proj:120mm |
| SPA-35838-SBRS | Satin Brass/Opal |                           |                   |                            |



IP44



- Decorative crystal style glass droplets

## MEGARA

### 3 Light Ceiling Light



IP44  
Rated




Class 2



1.3kg

| Code          | Finish       | Description                  | Lamp              | Dimensions           |
|---------------|--------------|------------------------------|-------------------|----------------------|
| SPA-35840-SMK | Chrome/Smoke | Megara 3 Light Ceiling Light | 3 x 3W max LED G9 | H:126mm<br>Dia:320mm |

IP44



- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets

## MEGARA

### 5 Light Ceiling Light



IP44  
Rated



Class 2




2.15kg

| Code          | Finish       | Description                  | Lamp              | Dimensions           |
|---------------|--------------|------------------------------|-------------------|----------------------|
| SPA-35841-CLR | Chrome/Clear | Megara 5 Light Ceiling Light | 5 x 3W max LED G9 | H:126mm<br>Dia:350mm |
| SPA-35841-SMK | Chrome/Smoke |                              |                   |                      |



**IP44**

- Chrome finish with clear or smoke glass shades
- Decorative crystal style glass droplets



## MEGARA

2 Light Cloche Ceiling Light


IP44 Rated  
 Class 2  
 1.3kg

| Code          | Finish       | Description                         | Lamp              | Dimensions           |
|---------------|--------------|-------------------------------------|-------------------|----------------------|
| SPA-35839-CLR | Chrome/Clear | Megara 2 Light Cloche Ceiling Light | 2 x 3W max LED G9 | H:250mm<br>Dia:200mm |
| SPA-35839-SMK | Chrome/Smoke |                                     |                   |                      |



**IP44**

- Available in chrome or satin brass



## SPARTI

Wall Light

IP44 Rated  
 Class 2  
 0.6kg


| Code           | Finish      | Description       | Lamp              | Dimensions                    |
|----------------|-------------|-------------------|-------------------|-------------------------------|
| SPA-35843-CHR  | Chrome      | Sparti Wall Light | 1 x 3W max LED G9 | H:270mm W:110mm<br>Proj:120mm |
| SPA-35843-SBRS | Satin Brass |                   |                   |                               |

900  
Lumens

IP44



- 26W LED module (SMD)
- Lm/W: 34
- CRI: 80



## CHIOS

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



0.8kg

| Code          | Finish | Description             | Power (w) | Colour (k) | Total Flux (lm) | Dimensions          |
|---------------|--------|-------------------------|-----------|------------|-----------------|---------------------|
| SPA-36129-CHR | Chrome | Chios LED Ceiling Light | 26W       | 4000k      | 900             | H:56mm<br>Dia:400mm |

400  
Lumens

IP44



- 11W LED module (SMD)
- Lm/W: 36
- CRI: 80

## MANDRA

LED Ceiling Light



IP44  
Rated



Non  
Dimmable



4000K  
CW



Class 2



0.6kg


| Code          | Finish | Description              | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           |
|---------------|--------|--------------------------|-----------|------------|-----------------|----------------------|
| SPA-36140-CHR | Chrome | Mandra LED Ceiling Light | 11W       | 4000k      | 400             | H:130mm<br>Dia:340mm |



IP44



- Chrome finish
- Decorative chiselled glass droplets

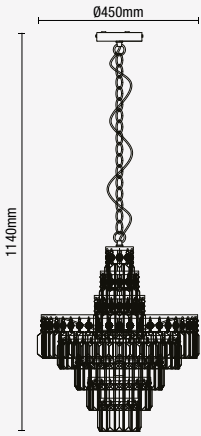

# BELLE

4 Light Chandelier



IP44  
Rated



Class 1



KG  
7.1kg


| Code          | Description              | Lamp              | Dimensions         |
|---------------|--------------------------|-------------------|--------------------|
| SPA-24677-CHR | Belle 4 Light Chandelier | 4 x 3W max LED C9 | H:1140mm Dia:450mm |



IP44



- Chrome finish
- Decorative chiselled glass droplets

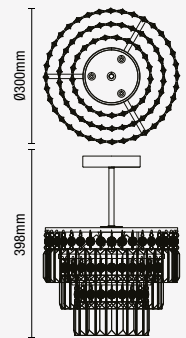

# BELLE

3 Light Semi Flush



| Code          | Description              | Lamp              | Dimensions        |
|---------------|--------------------------|-------------------|-------------------|
| SPA-24678-CHR | Belle 3 Light Semi-flush | 3 x 3W max LED C9 | H:398mm Dia:300mm |

IP44



- Chrome finish
- Clear crystal shades
- Adjustable chain length

## PEGASI

9 Light Chandelier



| Code          | Description               | Lamp              | Dimensions         |
|---------------|---------------------------|-------------------|--------------------|
| SPA-33929-CHR | Pegasi 9 Light Chandelier | 9 x 3W max LED C9 | H:1200mm Dia:550mm |



IP44



- Chrome finish
- Clear crystal shades

## PEGASI

5 Light Flush Chandelier




| Code          | Description          | Lamp              | Weight | Dimensions        |
|---------------|----------------------|-------------------|--------|-------------------|
| SPA-33930-CHR | Pegasi 5 Light Flush | 5 x 3W max LED G9 | 3.58kg | H:390mm Dia:480mm |

IP44



- Chrome finish
- Clear crystal shades




## PEGASI

3 Light Flush Chandelier




| Code          | Description               | Lamp              | Dimensions        |
|---------------|---------------------------|-------------------|-------------------|
| SPA-33974-CHR | Pegasi 3 Light Semi-flush | 3 x 3W max LED G9 | H:370mm Dia:460mm |

IP44



SPA-33931-CHR



SPA-33932-CHR

- Chrome finish
- Clear crystal shades

# PEGASI

Wall Light



| Code          | Description              | Lamp              | Weight | Dimensions                 |
|---------------|--------------------------|-------------------|--------|----------------------------|
| SPA-33931-CHR | Pegasi Shield Wall Light | 1 x 3W max LED G9 | 1.25kg | H:200mm W:160mm Proj:82mm  |
| SPA-33932-CHR | Pegasi Wall Light        | 1 x 3W max LED G9 | 0.77kg | H:195mm W:110mm Proj:175mm |





IP44



- Clear glass crystal droplets
- Available in chrome & brass

## VELA

### 9 Light Chandelier



IP44  
Rated



Class 1



KG  
6.4kg

| Code          | Finish | Description             | Lamp              | Dimensions         |
|---------------|--------|-------------------------|-------------------|--------------------|
| SPA-19714-CHR | Chrome | Vela 9 Light Chandelier | 9 x 3W max LED G9 | H:1060mm Dia:580mm |
| SPA-19714-BRS | Brass  |                         |                   |                    |



IP44



- Clear glass crystal droplets
- Available in chrome & brass


## VELA

Flush Chandelier



| Code          | Finish | Description        | Lamp              | Dimensions        |
|---------------|--------|--------------------|-------------------|-------------------|
| SPA-19713-CHR | Chrome | Vela 5 Light Flush | 5 x 3W max LED G9 | H:620mm Dia:500mm |
| SPA-19713-BRS | Brass  |                    |                   |                   |

IP44

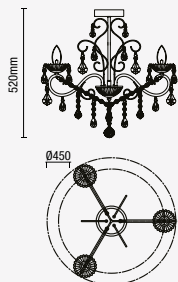

- Clear glass crystal droplets
- Available in chrome & brass

## VELA


Flush Chandelier



| Code          | Finish | Description        | Lamp              | Dimensions        |
|---------------|--------|--------------------|-------------------|-------------------|
| SPA-20182-CHR | Chrome | Vela 3 Light Flush | 3 x 3W max LED G9 | H:520mm Dia:450mm |
| SPA-20182-BRS | Brass  |                    |                   |                   |



IP44

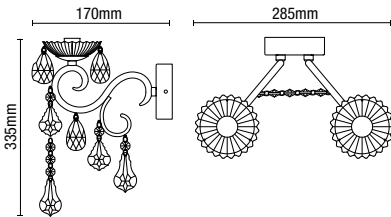

- Clear glass crystal droplets
- Available in chrome & brass



## VELA

Wall Light



IP44  
Rated



Class 1



2.6kg

| Code          | Finish | Description     | Lamp              | Dimensions                 |
|---------------|--------|-----------------|-------------------|----------------------------|
| SPA-20831-CHR | Chrome | Vela Wall Light | 2 x 3W max LED G9 | Proj:170mm W:285mm H:335mm |
| SPA-20831-BRS | Brass  |                 |                   |                            |




**3**  
SIZES  
AVAILABLE

**IP44**



- Clear glass crystal droplets
- Available in chrome & brass

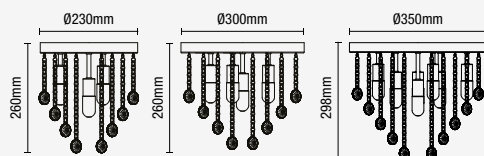

## CELESTE

### Flush



IP44  
Rated



Class 1

| Code          | Finish | Description           | Lamp              | Dimensions        |
|---------------|--------|-----------------------|-------------------|-------------------|
| SPA-24869-CHR | Chrome | Celeste 4 Light Flush | 4 x 3W max LED G9 | H:260mm Dia:230mm |
| SPA-24870-CHR |        | Celeste 6 Light Flush | 6 x 3W max LED G9 | H:260mm Dia:300mm |
| SPA-24871-CHR |        | Celeste 9 Light Flush | 9 x 3W max LED G9 | H:298mm Dia:350mm |
| SPA-24870-BRS | Brass  | Celeste 6 Light Flush | 6 x 3W max LED G9 | H:260mm Dia:300mm |
| SPA-24871-BRS |        | Celeste 9 Light Flush | 9 x 3W max LED G9 | H:298mm Dia:350mm |

2  
SIZES  
AVAILABLE

IP44




- Clear glass crystal droplets
- Available in chrome & brass

# ORLANDO

Flush

  
IP44  
Rated

  
Class 1

| Code          | Finish | Description        | Lamp              | Weight | Dimensions              |
|---------------|--------|--------------------|-------------------|--------|-------------------------|
| SPA-24468-CHR | Chrome | Orlando 4 Lt Flush | 4 x 3W max LED G9 | 2.36kg | L:230mm W:230mm H:189mm |
| SPA-24468-BRS | Brass  |                    |                   |        |                         |
| SPA-24467-BRS | Brass  | Orlando 5 Lt Flush | 5 x 3W max LED G9 | 4kg    | L:300mm W:300mm H:227mm |



IP44



- Chrome finish
- Bulb covers

# REENA


Ceiling/Wall Light



| Code          | Description         | Lamp              | Weight | Dimensions                 |
|---------------|---------------------|-------------------|--------|----------------------------|
| SPA-28327-CHR | Reena 6 Light Flush | 6 x 3W max LED G9 | 4.4kg  | H:220mm Dia:660mm          |
| SPA-28326-CHR | Reena 3 Light Flush | 3 x 3W max LED G9 | 1.7kg  | H:190mm Dia:410mm          |
| SPA-29195-CHR | Reena Wall Light    | 2 x 3W max LED G9 | 1.0kg  | Proj:138mm W:270mm H:140mm |



IP44

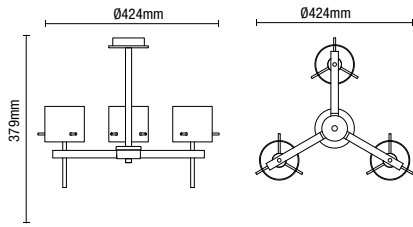

- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass



# GENE

Ceiling Light

 IP44 Rated  
 Class 1  
 1.58kg

| Code             | Finish      | Description                 | Lamp              | Dimensions        |
|------------------|-------------|-----------------------------|-------------------|-------------------|
| SPA-31726-CHR    | Chrome      | Gene Cylinder Ceiling Light | 3 x 3W max LED G9 | H:379mm Dia:424mm |
| SPA-31726-SATBRS | Satin Brass |                             |                   |                   |





IP44



- Glass cylinder shade
- Bulb covers for use in bathroom
- Matching items available
- Available in chrome & satin brass

## GENE

Wall Light



IP44  
Rated




Class 1



0.55kg

| Code             | Finish      | Description                 | Lamp              | Dimensions                    |
|------------------|-------------|-----------------------------|-------------------|-------------------------------|
| SPA-31725-CHR    | Chrome      | Gene Cylinder<br>Wall Light | 1 x 3W max LED G9 | H:205mm W:100mm<br>Proj:165mm |
| SPA-31725-SATBRS | Satin Brass |                             |                   |                               |



- Opal glass shade
- Matching items available
- Available in 3 finishes



**IP44**

## PORTO

Wall Light



IP44  
Rated


Class 1

0.58kg

| Code           | Finish     | Description              | Lamp              | Dimensions                 |
|----------------|------------|--------------------------|-------------------|----------------------------|
| SPA-31306-CHR  | Chrome     | Porto 1 Light Wall Light | 1 x 3W max LED G9 | H:230mm W:120mm Proj:174mm |
| SPA-31306-MBLK | Matt Black |                          |                   |                            |
| SPA-31306-SBRS | Brass      |                          |                   |                            |

**350**  
Lumens

**IP44**

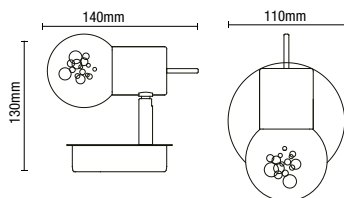

- 5W LED module (SMD)
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



## BUBBLE

LED Spotlight



IP44  
Rated


4000K  
CW

Class 1

0.56kg

| Code          | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                 |
|---------------|----------------------|-----------|------------|-----------------|-------------------|----------------------------|
| SPA-30781-CHR | Bubble LED Spotlight | 5W        | 3000k      | 350             | 70                | Proj:140mm W:110mm H:130mm |

IP44

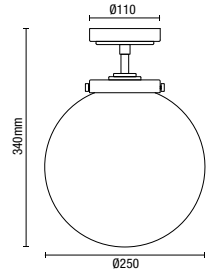

- Opal glass shade
- Matching items available
- Available in 3 finishes

## PORTO

Semi Flush



IP44 Rated




Class 1



0.95kg

| Code           | Finish     | Description              | Lamp                    | Dimensions        |
|----------------|------------|--------------------------|-------------------------|-------------------|
| SPA-31309-CHR  | Chrome     | Porto 1 Light Semi-Flush | 1 x 10W max LED E27 GLS | H:340mm Dia:250mm |
| SPA-31309-MBLK | Matt Black |                          |                         |                   |
| SPA-31309-SBRS | Brass      |                          |                         |                   |

IP44

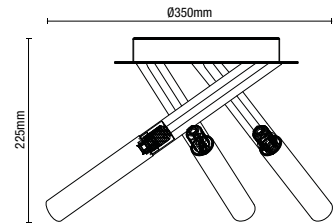

- Decorative tubular shades
- Available in 3 finishes

## CRUX

3 Light Ceiling Fitting



IP44 Rated




Class 1



1.25kg

| Code             | Finish      | Description                  | Lamp              | Dimensions        |
|------------------|-------------|------------------------------|-------------------|-------------------|
| SPA-20829-CHR    | Chrome      | Crux 3 Light Ceiling Fitting | 3 x 3W max LED G9 | H:225mm Dia:350mm |
| SPA-20829-MBLK   | Matt Black  |                              |                   |                   |
| SPA-20829-SATBRS | Satin Brass |                              |                   |                   |

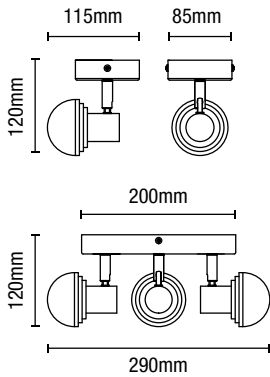

**IP44**

**Upto  
960  
Lumens**


- 5W LED module (SMD) per head
- Lm/W: 64
- CRI: 80
- Hrs: 20,000
- Single spot can be wall or ceiling mounted



## MILAN LED Spotlight



| Code          | Description             | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|---------------|-------------------------|-----------|------------|-----------------|-------------------|---------------------------|
| SPA-31733-CHR | Milan 3 Light Spotlight | 15W       | 3000k      | 960             | 64                | L:255mm W:290mm H:120mm   |
| SPA-31732-CHR | Milan Single Spotlight  | 5W        | 3000k      | 320             | 64                | Proj:115mm W:85mm H:120mm |

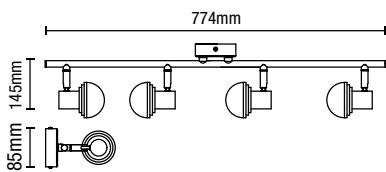

**IP44**

**1280  
Lumens**

- 4 x 5W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000


## MILAN LED 4 Light Bar Spotlight



| Code          | Description                 | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|---------------|-----------------------------|-----------|------------|-----------------|-------------------|------------------------|
| SPA-31734-CHR | Milan 4 Light Bar Spotlight | 20W       | 3000k      | 1280            | 64                | L:774mm W:85mm H:145mm |

900  
Lumens

IP44

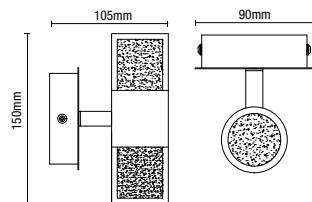

- 10W LED module (SMD)
- Lm/W: 64
- CRI: 80
- Hrs: 20,000

## OSLO


### Crackle LED Spotlight



| Code      | Description     | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                |
|-----------|-----------------|-----------|------------|-----------------|-------------------|---------------------------|
| SPA-31730 | Oslo Wall Light | 10W       | 3000k      | 740             | 90                | H:150mm W:90mm Proj:105mm |

3600  
Lumens

IP44

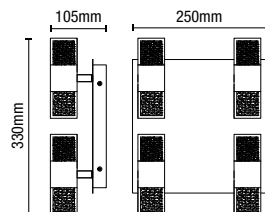

- 40W LED module (SMD)
- Lm/W: 45
- CRI: 80
- Hrs: 20,000

## OSLO


### Crackle LED Spotlight



| Code      | Description            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions              |
|-----------|------------------------|-----------|------------|-----------------|-------------------|-------------------------|
| SPA-31731 | Oslo Crackle Spotlight | 40W       | 3000k      | 1800            | 90                | H:105mm W:250mm L:330mm |

1480  
Lumens

IP44

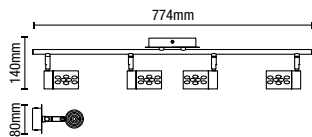

- 20W LED module (SMD)
- Lm/W: 74
- CRI: 80
- Hrs: 20,000

## FELIX

Bubble LED 4 Light Spotlight




| Code          | Description              | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|---------------|--------------------------|-----------|------------|-----------------|-------------------|------------------------|
| SPA-31780-CHR | Felix Bubble 4 Light Bar | 20W       | 4000k      | 1480            | 74                | L:774mm W:80mm H:140mm |



1350  
Lumens

IP44

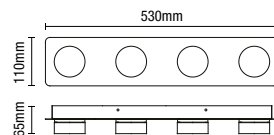

- Chrome finish with opal acrylic diffusers
- 20W LED module (SMD)
- Lm/W: 67
- CRI: 80
- Hrs: 20,000


## AMALFI LED 4 Light Bar



| Code          | Description        | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions             |
|---------------|--------------------|-----------|------------|-----------------|-------------------|------------------------|
| SPA-31737-CHR | Amalfi 4 Light Bar | 20W       | 4000k      | 1350            | 67                | L:530mm W:110mm H:65mm |

950  
Lumens

IP44




- Chrome finish with opal acrylic diffusers
- 15W LED module (SMD)
- Lm/W: 63
- CRI: 80
- Hrs: 20,000

## AMALFI LED 3 Light Flush



| Code          | Description          | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions       |
|---------------|----------------------|-----------|------------|-----------------|-------------------|------------------|
| SPA-31736-CHR | Amalfi 3 Light Flush | 15W       | 4000k      | 950             | 63                | H:65mm Dia:250mm |

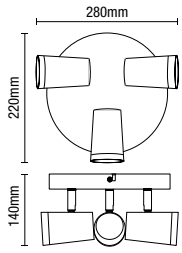

IP44

- Chrome finish
- Directable spotlights

## FREYA

### 3 Light Spotlight



| Code          | Description             | Lamp                | Dimensions              |
|---------------|-------------------------|---------------------|-------------------------|
| SPA-35080-CHR | Freya 3 Light Spotlight | 3 x 7W max LED GU10 | H:140mm W:280mm L:220mm |

IP44



- Chrome finish
- Directable spotlights

## FREYA

### 4 Light Bar Spotlight




| Code          | Description                 | Lamp                | Dimensions             |
|---------------|-----------------------------|---------------------|------------------------|
| SPA-35081-CHR | Freya 4 Light Bar Spotlight | 4 x 7W max LED GU10 | H:140mm W:620mm L:80mm |





IP44

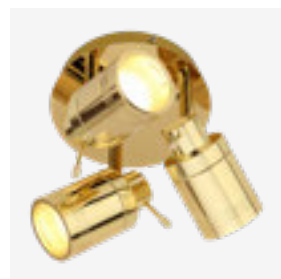- Available in 3 finishes
- Directable spotlights



## SCORPIUS

### 3 Light Spotlight

| Code           | Description                | Finish     | Lamp                | Dimensions              |
|----------------|----------------------------|------------|---------------------|-------------------------|
| SPA-27405-CHR  | Scorpius 3 Light Spotlight | Chrome     | 3 x 7W max LED GU10 | H:140mm W:220mm L:280mm |
| SPA-27405-MBLK | Scorpius 3 Light Spotlight | Matt Black | 3 x 7W max LED GU10 | H:140mm W:220mm L:280mm |
| SPA-27405-BRS  | Scorpius 3 Light Spotlight | Brass      | 3 x 7W max LED GU10 | H:140mm W:220mm L:280mm |

IP44



- Available in 3 finishes
- Directable spotlights

## SCORPIUS

### 4 Light Bar Spotlight



IP44  
Rated



Class 1



2.26kg

| Code           | Finish     | Description                    | Lamp                | Dimensions             |
|----------------|------------|--------------------------------|---------------------|------------------------|
| SPA-22560-CHR  | Chrome     | Scorpius 4 Light Bar Spotlight | 4 x 7W max LED GU10 | L:620mm W:80mm H:140mm |
| SPA-22560-MBLK | Matt Black |                                |                     |                        |
| SPA-22560-BRS  | Brass      |                                |                     |                        |

Upto  
**900**  
Lumens

**IP44**

**2**  
SIZES  
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

**Small - 180mm**

- 12W LED module (SMD)
- K: 4000
- Lm: 600
- Lm/W: 50
- Hrs: 20,000

**Large - 310mm**

- 18W LED module (SMD)
- K: 4000
- Lm: 900
- Lm/W: 50
- Hrs: 20,000

## DELPHI

LED Flush



| Code             | Finish       | Description            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | CRI | Dimensions          |
|------------------|--------------|------------------------|-----------|------------|-----------------|-------------------|-----|---------------------|
| SPA-34046-CHR    | Chrome       | Delphi Small LED Flush | 12W       | 4000k      | 600             | 50                | >80 | H:55mm<br>Dia:180mm |
| SPA-34046-SNIC   | Satin Nickel |                        |           |            |                 |                   |     |                     |
| SPA-34046-BRS    | Brass        |                        |           |            |                 |                   |     |                     |
| SPA-34046-SATBLK | Satin Black  |                        |           |            |                 |                   |     |                     |
| SPA-34047-CHR    | Chrome       | Delphi Large LED Flush | 18W       | 4000k      | 900             | 50                | >80 | H:85mm<br>Dia:310mm |
| SPA-34047-SNIC   | Satin Nickel |                        |           |            |                 |                   |     |                     |
| SPA-34047-BRS    | Brass        |                        |           |            |                 |                   |     |                     |
| SPA-34047-SATBLK | Satin Black  |                        |           |            |                 |                   |     |                     |



IP44

2  
SIZES  
AVAILABLE



- Glass opal diffuser
- Stylish & practical ceiling flush
- Available in 2 sizes & 4 colour options

## DELPHI Flush



| Code             | Finish       | Description           | Lamp                         | Dimensions       |
|------------------|--------------|-----------------------|------------------------------|------------------|
| SPA-34049-CHR    | Chrome       | Delphi Small<br>Flush | 1 x 6W max<br>LED E14 Candle | H:55mm Dia:180mm |
| SPA-34049-SNIC   | Satin Nickel |                       |                              |                  |
| SPA-34049-BRS    | Brass        |                       |                              |                  |
| SPA-34049-SATBLK | Satin Black  |                       |                              |                  |
| SPA-34050-CHR    | Chrome       | Delphi Large<br>Flush | 2 x 10W max E27 CLS          | H:85mm Dia:310mm |
| SPA-34050-SNIC   | Satin Nickel |                       |                              |                  |
| SPA-34050-BRS    | Brass        |                       |                              |                  |
| SPA-34050-SATBLK | Satin Black  |                       |                              |                  |







**600  
Lumens**



**IP44**



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K

• Multi-role bracket and CCT switch

## TAURI

### 6W LED Wall/Ceiling 5 in 1 Light



| Code           | Finish       | Description                            | Lamp   | Lumen | Weight | Dimensions       |
|----------------|--------------|--|--------|-------|--------|------------------|
| SPA-34008-WHT  | White        | Tauri LED Light                        | 6W LED | 600   | 0.3kg  | H:15mm Dia:139mm |
| SPA-34010-SNIC | Satin Nickel | Tauri Magnetic Ring<br>(Fits 6W model) | -      | -     | 0.11kg | H:15mm Dia:139mm |
| SPA-34012-CHR  | Chrome       |  |        |       |        |                  |
| SPA-35711-SBLK | Satin Black  |  |        |       |        |                  |
| SPA-35712-SBRS | Satin Brass  |  |        |       |        |                  |



1200  
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K

- Multi-role bracket and CCT switch

## TAURI

### 12W LED Wall/Ceiling 5 in 1 Light



| Code      | Finish       | Description                             | Lamp    | Lumen | Weight | Dimensions       |
|-----------|--------------|---|---------|-------|--------|------------------|
| SPA-35709 | White        | Tauri LED Light                         | 12W LED | 1200  | 0.42kg | H:15mm Dia:164mm |
| SPA-35713 | Satin Nickel | Tauri Magnetic Ring<br>(Fits 12W model) | -       | -     | 0.17kg | H:15mm Dia:164mm |
| SPA-35716 | Chrome       |   |         |       |        |                  |
| SPA-35714 | Satin Black  |   |         |       |        |                  |
| SPA-35715 | Satin Brass  |   |         |       |        |                  |

1800  
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

## TAURI

18W LED Wall/Ceiling 5 in 1 Light



55-175mm  
Cut-out



IP44  
Rated



CCT



Class 2

| Code           | Finish       | Description                             | Lamp    | Lumen | Weight | Dimensions       |
|----------------|--------------|---|---------|-------|--------|------------------|
| SPA-34009-WHT  | White        | Tauri LED Light                         | 18W LED | 1800  | 0.58kg | H:15mm Dia:217mm |
| SPA-34011-SNIC | Satin Nickel | Tauri Magnetic Ring<br>(Fits 18W model) | -       | -     | 0.21kg | H:15mm Dia:217mm |
| SPA-34013-CHR  | Chrome       |   |         |       |        |                  |
| SPA-35717      | Satin Black  |   |         |       |        |                  |
| SPA-35718      | Satin Brass  |   |         |       |        |                  |


2400  
Lumens



IP44



- Super slim design: 15mm thickness
- Can be recessed, ceiling mounted or wall surface mounted
- Push-fit, drag-detach bracket
- Anti-drop hoop for safety installation
- Fast-fit terminal connector
- 4 colours of magnetic rings available
- 12,000 hours LED lifetime
- Switch between 3000K/4000K/6000K



- Multi-role bracket and CCT switch

## TAURI

### 24W LED Wall/Ceiling 5 in 1 Light



60-250mm  
Cut-out



IP44  
Rated



CCT



Class 2

| Code      | Finish       | Description                             | Lamp    | Lumen | Weight | Dimensions       |
|-----------|--------------|---|---------|-------|--------|------------------|
| SPA-35710 | White        | Tauri LED Light                         | 24W LED | 2400  | 0.66kg | H:15mm Dia:290mm |
| SPA-35719 | Satin Nickel | Tauri Magnetic Ring<br>(Fits 24W model) | -       | -     | 0.27kg | H:15mm Dia:290mm |
| SPA-35722 | Chrome       |   |         |       |        |                  |
| SPA-35720 | Satin Black  |   |         |       |        |                  |
| SPA-35721 | Satin Brass  |   |         |       |        |                  |

**FAST  
FIT**

**IP65**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

## YATE

### Fixed IP65 Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27467-WHT  | White        | IP65      | 1 x 7W max<br>LED GU10 | Ø85mm  | Dia:80mm Proj:115mm<br>H:125mm |
| ELA-27467-CHR  | Chrome       |           |                        |        |                                |
| ELA-27467-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27467-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27467-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27467-SBRS | Satin Brass  |           |                        |        |                                |



**FAST  
FIT**



- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes

- Fast-fit connector box

## YATE

Adjustable Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27466-WHT  | White        | IP20      | 1 x 7W max<br>LED GU10 | Ø85mm  | Dia:93mm Proj:120mm<br>H:135mm |
| ELA-27466-CHR  | Chrome       |           |                        |        |                                |
| ELA-27466-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27466-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27466-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27466-SBRS | Satin Brass  |           |                        |        |                                |

**FAST  
FIT**




- 30, 60 and 90 minutes protection
- Suitable for homes with low ceilings
- Available in 6 finishes



- Fast-fit connector box

## YATE

### Fixed Fire Rated Downlight



| Code           | Finish       | IP Rating | Lamp                   | Cutout | Dimensions                     |
|----------------|--------------|-----------|------------------------|--------|--------------------------------|
| ELA-27465-WHT  | White        | IP20      | 1 x 7W max<br>LED GU10 | Ø72mm  | Dia:80mm Proj:115mm<br>H:135mm |
| ELA-27465-CHR  | Chrome       |           |                        |        |                                |
| ELA-27465-BCHR | Black Chrome |           |                        |        |                                |
| ELA-27465-SCHR | Satin Chrome |           |                        |        |                                |
| ELA-27465-MBLK | Matt Black   |           |                        |        |                                |
| ELA-27465-SBRS | Satin Brass  |           |                        |        |                                |

NEW

700  
Lumens

IP65

FAST  
FIT

CCT



- Dimmable
- Fire rated
- Fast fit terminals
- 7W LED module (COB)
- 3000/4000/6000K (CCT)

- Lm: 700
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



## EDEN

IP65 Tiltable Fire-rated Downlight



| Code           | Finish      | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|----------------|-------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-41111-WHT  | White       | 7W        | 700             | 100               | 3 CCT      | Dia:87mm<br>H:30mm<br>Cutout:70mm |
| SPA-41111-BLK  | Black       |           |                 |                   |            |                                   |
| SPA-41111-CHR  | Chrome      |           |                 |                   |            |                                   |
| SPA-41111-SBRS | Satin Brass |           |                 |                   |            |                                   |



**NEW**

**900 Lumens**

**4 CCT**







**FAST FIT**

- Dimmable
- Fire rated
- Colour changing technology
- Switch between 2700K/3000K/4000K/6000K
- Fast fit terminals
- 8W LED module (COB)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000
- Anti-glare reflector



# JENN

Anti-glare Fire-rated Downlight

-   
Fire-rated
-   
IP65 Rated
-   
60° Beam
-   
70mm Cut-out
-   
CCT
-   
Class 2
-   
0.286kg

| Code              | Finish      | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|-------------------|-------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-41112-BLK/WHT | Black/White | 8W        | 900             | 112.5             | 4 CCT      | Dia:84mm<br>H:65mm<br>Cutout:70mm |

**500  
Lumens**

**IP65**

**FAST  
FIT**




- Dimmable
- Fire rated
- 30mm Super low profile
- Fast fit terminals
- Available in 7 finishes / 3 pack or single
- 5W LED module (SMD)
- K: 4000
- Lm: 500
- Lm/W: 100
- CRI: 80
- Hrs: 50,000



## COMO


### IP65 Tiltable Fire-rated Downlight



| Code                 | Pack Size         | Finish         | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (K) | Dimensions                        |
|----------------------|-------------------|----------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-38570/38571-ACOP | 3 Pack/<br>Single | Antique Copper | 5W        | 500             | 100               | 4000       | Dia:87mm<br>H:30mm<br>Cutout:70mm |
| SPA-38570/38571-BCHR |                   | Black Chrome   |           |                 |                   |            |                                   |
| SPA-38570/38571-CHR  |                   | Chrome         |           |                 |                   |            |                                   |
| SPA-38570/38571-MWHT |                   | Matt White     |           |                 |                   |            |                                   |
| SPA-38570/38571-SBLK |                   | Satin Black    |           |                 |                   |            |                                   |
| SPA-38570/38571-SBRS |                   | Satin Brass    |           |                 |                   |            |                                   |
| SPA-38570/38571-SNIC |                   | Satin nickel   |           |                 |                   |            |                                   |




- Dimmable
- Fire rated
- Colour changing technology
- Switch between 3000K/4000K/6000K
- Fast fit terminals
- Available in 7 finishes
- 8W LED module (SMD)
- Lm: 900
- Lm/W: 112.5
- CRI: 80
- Hrs: 50,000

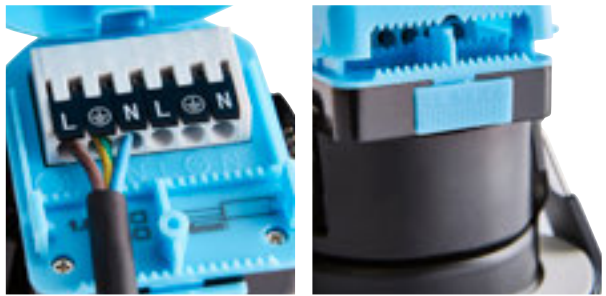

## RHOM

### IP65 Fixed Fire-rated Downlight



| Code           | Pack Size | Finish         | Power (W) | Total Flux (lm) | Efficiency (lm/W) | Colour (k) | Dimensions                        |
|----------------|-----------|----------------|-----------|-----------------|-------------------|------------|-----------------------------------|
| SPA-38572-ACOP | Single    | Antique Copper | 8W        | 900             | 112.5             | CCT        | Dia:87mm<br>H:65mm<br>Cutout:70mm |
| SPA-38572-BCHR |           | Black Chrome   |           |                 |                   |            |                                   |
| SPA-38572-CHR  |           | Chrome         |           |                 |                   |            |                                   |
| SPA-38572-MWHT |           | Matt White     |           |                 |                   |            |                                   |
| SPA-38572-SBLK |           | Satin Black    |           |                 |                   |            |                                   |
| SPA-38572-SBRS |           | Satin Brass    |           |                 |                   |            |                                   |
| SPA-38572-SNIC |           | Satin nickel   |           |                 |                   |            |                                   |



IP65



Tilted




Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

## CALI

Tiltable Downlight



| Code            | Description                   | Finish         | Lamp                   | Dimensions                             |
|-----------------|-------------------------------|----------------|------------------------|--|
| SPA-30841-BRCOP | Cali<br>Tiltable<br>Downlight | Brushed Copper | 1 x 7W max<br>LED GU10 | Dia:92mm<br>H:100mm<br><br>Cutout:74mm |
| SPA-30841-MWHT  |                               | Matt White     |                        |  |
| SPA-30841-MBLK  |                               | Matt Black     |                        |  |
| SPA-30842-CHR   |                               | Chrome         |                        |  |
| SPA-30842-SBRS  |                               | Satin Brass    |                        |  |
| SPA-30842-SCHR  |                               | Satin Chrome   |                        |  |

IP65



Tilted



Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes



## CALI

### Square Tiltable Downlight



IP65  
Rated



74mm  
Cut-out



Class 2



0.17kg

| Code            | Description                    | Finish         | Lamp                | Dimensions                                     |
|-----------------|--------------------------------|----------------|---------------------|--|
| SPA-38577-BRCOP | Cali Square Tiltable Downlight | Brushed Copper | 1 x 7W max LED GU10 | L:82mm<br>W:82mm<br>H:100mm<br><br>Cutout:74mm |
| SPA-35724-MWHT  |                                | Matt White     |                     |  |
| SPA-35725-MBLK  |                                | Matt Black     |                     |  |
| SPA-35727-CHR   |                                | Chrome         |                     |  |
| SPA-35723-SBRS  |                                | Satin Brass    |                     |  |
| SPA-35726-SCHR  |                                | Satin Chrome   |                     |  |

IP44



- Chrome finish
- Pull switch

## ARIES

2 Light Wall Light



IP44  
Rated



Class 1



0.8kg

| Code            | Description              | Lamp              | Dimensions                |
|-----------------|--------------------------|-------------------|---------------------------|
| SPA-PR12744-CHR | Aries 2 Light Wall Light | 2 x 3W max LED G9 | Proj:115mm W:360mm H:60mm |

IP44



- Chrome finish
- Pull switch

# AQUARIUS

Wall Light

 IP44 Rated |  Class 1 |  0.55kg

| Code            | Description         | Lamp              | Dimensions                 |
|-----------------|---------------------|-------------------|----------------------------|
| SPA-PR17146-CHR | Aquarius Wall Light | 1 x 3W max LED G9 | Proj:180mm W:110mm H:220mm |

395  
Lumens

IP44



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70
- CRI: 80
- Hrs: 20,000



## CHAI

Picture/Mirror Light



IP44  
Rated



3000K  
WW



Class 1



0.5kg

| Code             | Finish       | Description                            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                     |
|------------------|--------------|--|-----------|------------|-----------------|-------------------|--------------------------------|
| SPA-30993-CHR    | Chrome       | Chai Bathroom Picture/Mirror LED Light | 8W        | 3000k      | 395             | 70                | H:80mm<br>W:40mm<br>Proj:160mm |
| SPA-30993-SNIC   | Satin Nickel |  |           |            |                 |                   |                                |
| SPA-30993-SATBRS | Satin Brass  |  |           |            |                 |                   |                                |
| SPA-30993-MBLK   | Matt Black   |  |           |            |                 |                   |                                |

IP44



- Available in chrome & satin brass
- Pull switch

# CORVUS


## Wall Light

 IP44 Rated  
 Class 1  
 0.5kg

| Code                | Finish      | Description       | Lamp              | Dimensions                    |
|---------------------|-------------|-------------------|-------------------|-------------------------------|
| SPA-6888.014-CHR    | Chrome      | Corvus Wall Light | 2 x 3W max LED G9 | W:205mm H:105mm<br>Proj:155mm |
| SPA-6888.014-SATBRS | Satin Brass |                   |                   |                               |



IP44

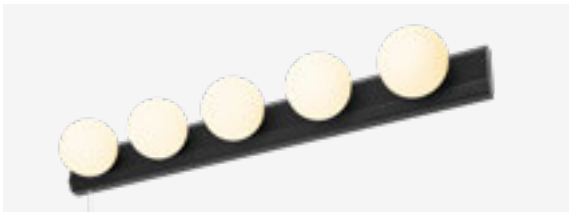

- Available in 3 finishes
- Pull switch

# ARA

## Hollywood 5 Light Bar Wall Light

IP44 Rated | Class 1 | 2kg

| Code               | Finish      | Description            | Lamp              | Dimensions                   |
|--------------------|-------------|------------------------|-------------------|------------------------------|
| SPA-PR13145-CHR    | Chrome      | Ara 5 Light Wall Light | 5 x 3W max LED G9 | W:680mm H:80mm<br>Proj:110mm |
| SPA-PR13145-MBLK   | Matt Black  |                        |                   |                              |
| SPA-PR13145-SATBRS | Satin Brass |                        |                   |                              |

356  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Integrated shaver socket
- Can be mounted landscape or portrait
- 12W LED module (SMD)
- K: 5000
- Lm: 356
- Lm/W: 29

# ECTI

## Illuminated Bathroom Mirror



Shaver  
Socket



IP44  
Rated



5000K  
DW



Class 1



6.65kg

| Code      | Description                      | Lamp    | Dimensions                |
|-----------|----------------------------------|---------|---------------------------|
| SPA-34035 | Ecti Illuminated Bathroom Mirror | 12W LED | H:700mm W:500mm Proj:56mm |

763  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 16W LED module (SMD)
- K: 5000
- Lm: 763
- Lm/W: 47



## FLEC

Illuminated Bathroom Mirror



Demist  
Pad



IP44  
Rated



5000K  
DW



Class 1




8.95kg

| Code      | Description                      | Lamp    | Dimensions                |
|-----------|----------------------------------|---------|---------------------------|
| SPA-34036 | Flec Illuminated Bathroom Mirror | 16W LED | H:800mm W:600mm Proj:33mm |

504  
Lumens

IP44



- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 18W LED module (SMD)
- K: 5000
- Lm: 504
- Lm/W: 18

# REF


## Illuminated Bathroom Mirror

Demist Pad | IP44 Rated | 5000K DW | Class 1 | 6.3kg

| Code      | Description                     | Lamp    | Dimensions                |
|-----------|---------------------------------|---------|---------------------------|
| SPA-34037 | Ref Illuminated Bathroom Mirror | 18W LED | H:700mm W:500mm Proj:46mm |

1337  
Lumens

IP44

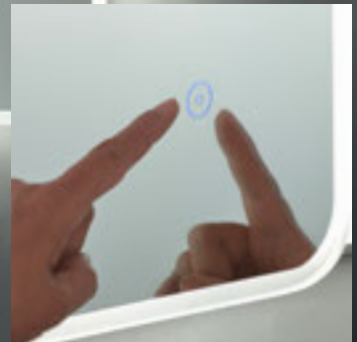

- Mirrored glass
- Bathroom Zone 2
- Touch switch
- Can be mounted landscape or portrait
- 22W LED module (SMD)
- K: 5000
- Lm: 1337
- Lm/W: 60

## NOR

Illuminated Bathroom Mirror



Demist  
Pad



IP44  
Rated



5000K  
DW



Class 1



6.7kg

| Code      | Description                     | Lamp    | Dimensions                |
|-----------|---------------------------------|---------|---------------------------|
| SPA-34038 | Nor Illuminated Bathroom Mirror | 22W LED | H:800mm W:600mm Proj:46mm |

296  
Lumens

IP44







- Mirrored glass
- Bathroom Zone 2
- Rocker ON/OFF switch
- Can be mounted landscape or portrait
- 8W LED module (SMD)
- K: 5000
- Lm: 296
- Lm/W: 60



# ION

Illuminated Bathroom Mirror

| Code      | Description                     | Lamp   | Dimensions                |
|-----------|---------------------------------|--------|---------------------------|
| SPA-34039 | Ion Illuminated Bathroom Mirror | 8W LED | H:500mm W:400mm Proj:46mm |







**1690**  
Lumens

**IP44**



- Mirrored glass
- Bathroom Zone 2
- Touch sensor switch
- 12W LED module (SMD)
- K: 5000
- Lm: 1690
- Lm/W: 140

## NYX Illuminated Bathroom Mirror



Touch  
Switch



IP44  
Rated



5000K  
DW



Class 1



6.9kg


| Code      | Description            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | CRI | Dimensions          |
|-----------|------------------------|-----------|------------|-----------------|-------------------|-----|---------------------|
| SPA-35706 | Nyx Illuminated Mirror | 12W       | 5000k      | 1690            | 140               | >80 | Dia:600mm Proj:35mm |





**2190**  
Lumens

**IP44**



- Soft close hinged single door
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2190
- Lm/W: 64



# ARTE

## Illuminated Bathroom Mirror Cabinet




| Code      | Description                                   | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | CRI | Dimensions                    |
|-----------|---|-----------|------------|-----------------|-------------------|-----|-------------------------------|
| SPA-35707 | Arte Illuminated Single Door Mirrored Cabinet | 34W       | 5000k      | 2190            | 64                | >80 | W:500mm H:700mm<br>Proj:130mm |





**2190**  
Lumens

**IP44**



- Soft close hinged double doors
- Door mirrored on both sides
- Adjustable height tempered glass shelves
- Touch sensor ON/OFF switch
- Demist pad & shaver socket
- 34W LED module (SMD)
- K: 5000
- Lm: 2500
- Lm/W: 73.5



**HYM**

**Illuminated Bathroom Mirror Cabinet**



| Code      | Description                             | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | CRI | Dimensions                    |
|-----------|---|-----------|------------|-----------------|-------------------|-----|-------------------------------|
| SPA-35708 | Hym Illuminated 2 Door Mirrored Cabinet | 34W       | 5000k      | 2500            | 73.5              | >80 | W:600mm H:800mm<br>Proj:130mm |





IPX4

- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorization with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Automatic opening and closing seat cover
- Integral LED night light
- Ceramic toilet bowl

## WALL MOUNT

### Smart Toilet




| Code      | Description             | Finish | Material | Dimensions                  |
|-----------|-------------------------|--------|----------|-----------------------------|
| SPA-37153 | Wall Mount Smart Toilet | White  | Ceramic  | L:598mm x W:380mm x H:332mm |

**IP67**



- Heated seat with five adjustable temperature settings
- Front and rear wash modes provide warm water for cleansing
- Adjustable water temperature and water pressure
- Choose oscillating or pulsating spray
- Warm-air drying system with adjustable air speed and temperature
- Automatic deodorisation with carbon filter for odour control
- Soft-close seat and lid to prevent from slamming
- Easy installation

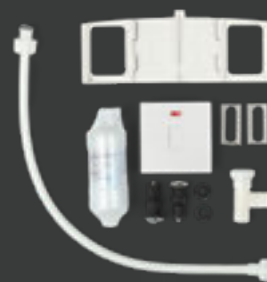

• Includes fused spur and fixing kit

# MITO

## Electric Bidet Toilet Seat



| Code      | Description                | Finish | Material | Dimensions              |
|-----------|----------------------------|--------|----------|-------------------------|
| SPA-34865 | Electric Bidet Toilet Seat | White  | Plastic  | H:180mm W:435mm L:485mm |



# Spa<sup>PRO</sup>

## PREMIUM

Spa PRO beautifully designed, premium glass decorative lighting that will bring a touch of glamour to any home.

COLLECTIONS

298-307

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Small 3 Light Flush

  
IP44  
Rated

  
Class 1

| Code         | Description          | Lamp              | Dimensions        |
|--------------|----------------------|-------------------|-------------------|
| SP-25204-CHR | Bresna 3 Light Flush | 3 x 3W max LED C9 | H:350mm Dia:350mm |

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Small 3 Light Flush

  
IP44  
Rated

  
Class 1

| Code         | Description                | Lamp              | Dimensions        |
|--------------|----------------------------|-------------------|-------------------|
| SP-31450-CHR | Bresna Small 3 Light Flush | 3 x 3W max LED G9 | H:350mm Dia:280mm |



IP44



- Chrome finish
- Clear crystal shades

## BRESNA

6 Light Pendant

IP44  
Rated

Class 1

| Code         | Description            | Lamp              | Dimensions         |
|--------------|------------------------|-------------------|--------------------|
| SP-25202-CHR | Bresna 6 Light Pendant | 6 x 3W max LED G9 | H:1200mm Dia:500mm |

IP44



- Chrome finish
- Clear crystal shades

## BRESNA

Wall Light



| Code         | Description       | Lamp              | Dimensions                 |
|--------------|-------------------|-------------------|----------------------------|
| SP-25203-CHR | Bresna Wall Light | 2 x 3W max LED G9 | Proj:175mm W:300mm H:200mm |

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

3 Light Chandelier

IP44  
Rated

Class 1

| Code         | Description                | Lamp              | Dimensions         |
|--------------|----------------------------|-------------------|--------------------|
| SP-31449-CHR | Annalee 3 Light Chandelier | 3 x 3W max LED G9 | H:1520mm Dia:450mm |

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

Small 5 Light Chandelier

IP44  
Rated

Class 1

| Code         | Description                | Lamp              | Dimensions         |
|--------------|----------------------------|-------------------|--------------------|
| SP-25256-CHR | Annalee 5 Light Chandelier | 5 x 3W max LED G9 | H:1000mm Dia:385mm |

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

5 Light Chandelier

IP44  
Rated

Class 1

| Code         | Description                | Lamp              | Dimensions         |
|--------------|----------------------------|-------------------|--------------------|
| SP-25254-CHR | Annalee 5 Light Chandelier | 5 x 3W max LED C9 | H:1580mm Dia:500mm |

IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

8 Light Chandelier

IP44  
Rated

Class 1

| Code         | Description                | Lamp              | Dimensions         |
|--------------|----------------------------|-------------------|--------------------|
| SP-25255-CHR | Annalee 8 Light Chandelier | 8 x 3W max LED C9 | H:1650mm Dia:400mm |



IP44



- Chrome finish
- Clear crystal shades

## ANNALEE

Wall Light

  
IP44  
Rated

  
Class 1

| Code         | Description        | Lamp              | Dimensions                 |
|--------------|--------------------|-------------------|----------------------------|
| SP-25253-CHR | Annalee Wall Light | 2 x 3W max LED G9 | Proj:156mm W:297mm H:420mm |

IP44



- Chrome finish
- Clear crystal shades

## NORE

Small Encased Flush



| Code         | Description              | Lamp              | Dimensions        |
|--------------|--------------------------|-------------------|-------------------|
| SP-25211-CHR | Nore Small Encased Flush | 5 x 3W max LED G9 | H:300mm Dia:400mm |



## KITCHEN

A range of modern LED kitchen lighting, including tape, under cabinet lights, link lights and plinth lights.

|                     |         |
|---------------------|---------|
| UNDER CABINET       | 310-317 |
| KINETIC SWITCHES    | 318-321 |
| KONECT PLUG & PLAY  | 322-330 |
| SOCKETS/QI CHARGING | 331     |
| TRACK LIGHTING      | 332-336 |
| PLINTH LIGHTING     | 337     |
| LED BATTENS         | 338-339 |



**Upto  
150  
Lumens**

**NO  
DRIVER  
REQ.**

**WARM WHITE  
3000K**

**COOL WHITE  
4000K**


**DAYLIGHT WHITE  
6000K**


- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1m cable included
- 1.5W LED module (SMD)
- Lm: 150
- Lm/W: 100



# FONTE

LED Under Cabinet Light




| Code      | Description               | Lamp     | Kelvin | Lumen | Dimensions                |
|-----------|---------------------------|----------|--------|-------|---------------------------|
| CUL-25319 | Fonte Under Cabinet Light | 1.5W LED | 3000   | 130   | H:126mm W:145mm Proj:32mm |
| CUL-21626 | Fonte Under Cabinet Light | 1.5W LED | 4000   | 140   | H:126mm W:145mm Proj:32mm |
| CUL-25219 | Fonte Under Cabinet Light | 1.5W LED | 6000   | 150   | H:126mm W:145mm Proj:32mm |

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K
- 1.5W LED module (SMD)
- Lm/W: 100



## POZZA

### Recessed LED Under Cabinet Light




| Code      | Description               | Lamp     | Kelvin | Lumen | Dimensions         |
|-----------|---------------------------|----------|--------|-------|--------------------|
| CUL-25317 | Pozza Under Cabinet Light | 1.5W LED | 3000   | 130   | Dia:65mm Proj:20mm |
| CUL-21624 | Pozza Under Cabinet Light | 1.5W LED | 4000   | 140   | Dia:65mm Proj:20mm |

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



## LAGHETTO

### LED Under Cabinet Light



| Code      | Description                  | Lamp     | Kelvin | Lumen | Dimensions         |
|-----------|------------------------------|----------|--------|-------|--------------------|
| CUL-25318 | Laghetto Under Cabinet Light | 1.5W LED | 3000   | 130   | Dia:75mm Proj:26mm |
| CUL-21625 | Laghetto Under Cabinet Light | 1.5W LED | 4000   | 140   | Dia:75mm Proj:26mm |
| CUL-25218 | Laghetto Under Cabinet Light | 1.5W LED | 6000   | 150   | Dia:75mm Proj:26mm |

- Mains connected - no driver required
- Brushed satin nickel finish with opal polycarbonate diffuser
- Available in 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 100



## LAGO

### LED Under Cabinet Light



| Code      | Description              | Lamp     | Kelvin | Lumen | Dimensions               |
|-----------|--------------------------|----------|--------|-------|--------------------------|
| CUL-25320 | Lago Under Cabinet Light | 1.5W LED | 3000   | 130   | H:142mm W:80mm Proj:32mm |
| CUL-21627 | Lago Under Cabinet Light | 1.5W LED | 4000   | 140   | H:142mm W:80mm Proj:32mm |
| CUL-25220 | Lago Under Cabinet Light | 1.5W LED | 6000   | 150   | H:142mm W:80mm Proj:32mm |





**180**  
Lumens



**NO**  
**DRIVER**  
**REQ.**

**WARM WHITE**  
3000K

**COOL WHITE**  
4000K

**DAYLIGHT WHITE**  
6000K

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



## ARGI

LED Round Under Cabinet Light



| Code      | Description                            | Lamp   | Lumen | Dimensions      |
|-----------|--|--------|-------|-----------------|
| CUL-35864 | Argi Round LED CCT Under Cabinet Light | 3W LED | 180   | Dia:75mm H:29mm |

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Can be recessed or surface mounted with removeable spacer
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



## ELLEN

### LED Round Under Cabinet Light



| Code      | Description                             | Lamp     | Lumen | Dimensions         |
|-----------|---|----------|-------|--------------------|
| CUL-35860 | Ellen Round LED CCT Under Cabinet Light | 1.5W LED | 120   | Dia:75mm Proj:29mm |

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 1.5W LED module (SMD)
- Lm/W: 80



## FARO

### LED Triangle Under Cabinet Light



| Code      | Description                               | Lamp     | Lumen | Dimensions                |
|-----------|---|----------|-------|---------------------------|
| CUL-35861 | Faro Triangle LED CCT Under Cabinet Light | 1.5W LED | 120   | H:122mm W:142mm Proj:36mm |

- Mains connected - no driver required
- Satin nickel finish with opal polycarbonate diffuser
- Colour changing technology
- Switch between 3000K/4000K/6000K
- 3W LED module (SMD)
- Lm/W: 60



## AYLA

### LED Triangle Under Cabinet Light



| Code      | Description                               | Lamp   | Lumen | Dimensions                |
|-----------|---|--------|-------|---------------------------|
| CUL-35865 | Ayla Triangle LED CCT Under Cabinet Light | 3W LED | 180   | H:122mm W:142mm Proj:36mm |



## LEGARE

LINK LEAD

2  
SIZES  
AVAILABLE



- Enables you to connect 2 legare or bude link lights on the same circuit
- Available in 2 lengths
- IEC C8 cable


| Code      | Length     |
|-----------|------------|
| CUL-21665 | 0,5 meters |
| CUL-21666 | 1 meter    |

Upto  
**1200**  
Lumens

**NO  
DRIVER  
REQ.**



- SMD LED
- Silver aluminium body with opal polycarbonate diffuser
- Available in 3000/4000K
- ON/OFF rocker switch
- No driver required
- Supplied with 2m power lead
- Simple connection system



Simple to butt connect fittings together

## LEGARE

Under Cabinet Link Light



Class 2

| Code      | Description                     | Power (w) | Kelvin | Lumen | Weight | Length | Dimensions                |
|-----------|---------------------------------|-----------|--------|-------|--------|--------|---------------------------|
| CUL-25321 |                                 | 4W LED    | 3000   | 400   | 0.21kg | 300mm  | L:300mm W:24mm Proj:34mm  |
| CUL-25323 |                                 | 12W LED   | 3000   | 1000  | 0.4kg  | 870mm  | L:870mm W:24mm Proj:34mm  |
| CUL-21661 | Legare Under Cabinet Link Light | 4W LED    | 4000   | 400   | 0.21kg | 300mm  | L:300mm W:24mm Proj:34mm  |
| CUL-21662 |                                 | 7W LED    | 4000   | 700   | 0.3kg  | 500mm  | L:500mm W:24mm Proj:34mm  |
| CUL-21663 |                                 | 12W LED   | 4000   | 1000  | 0.4kg  | 870mm  | L:870mm W:24mm Proj:34mm  |
| CUL-21664 |                                 | 14W LED   | 4000   | 1200  | 0.59kg | 1200mm | L:1200mm W:24mm Proj:34mm |




Upto  
**1200**  
Lumens



**NO  
DRIVER  
REQ.**

- Silver aluminium body with opal polycarbonate diffuser
- Switch between 3000K/OFF/4000K
- No driver required
- Supplied with 2m power lead
- Simple connection system



- Simple to butt connect fittings together

## LEGARE

### CCT Under Cabinet Link Light



| Code          | Description           | Lamp    | Lumen | Weight | Length | Dimensions                |
|---------------|-----------------------|---------|-------|--------|--------|---------------------------|
| CUL-34223-CCT | Legare CCT Link Light | 4W LED  | 400   | 0.21kg | 300mm  | L:300mm W:24mm Proj:34mm  |
| CUL-34224-CCT | Legare CCT Link Light | 7W LED  | 700   | 0.3kg  | 500mm  | L:500mm W:24mm Proj:34mm  |
| CUL-34225-CCT | Legare CCT Link Light | 12W LED | 1000  | 0.4kg  | 870mm  | L:870mm W:24mm Proj:34mm  |
| CUL-34226-CCT | Legare CCT Link Light | 14W LED | 1200  | 0.59kg | 1200mm | L:1200mm W:24mm Proj:34mm |




Upto  
**350**  
Lumens

- Ideal for multiple applications
- No wiring required
- PIR sensor with 3M detection distance
- AUTO ON/ALWAYS ON/OFF function
- 4 hours charge time



## LIGERO

Rechargeable Under Cabinet Light




| Code      | Power (w) | Colour (k) | Total Flux (lm) | Battery        | Charge Time | Run Time | Dimensions           |
|-----------|-----------|------------|-----------------|----------------|-------------|----------|----------------------|
| CUL-37386 | 1W        | 4000k      | 90              | 750mAh Li-ion  | 4 Hours     | 4 Hours  | L:200mm W:40mm H:9mm |
| CUL-37387 | 2W        | 4000k      | 160             | 1100mAh Li-ion | 4 Hours     | 5 Hours  | L:400mm W:40mm H:9mm |
| CUL-37388 | 3W        | 4000k      | 230             | 1500mAh Li-ion | 4 Hours     | 5 Hours  | L:564mm W:40mm H:9mm |
| CUL-37389 | 4W        | 4000k      | 350             | 2200mAh Li-ion | 4 Hours     | 5 Hours  | L:864mm W:40mm H:9mm |





## PLUG & PLAY SYSTEM

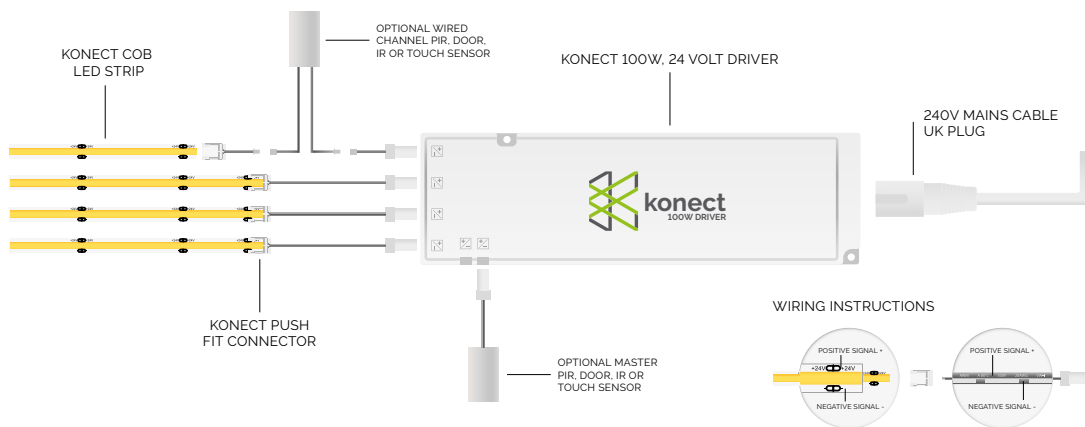

The Konec plug and play system features revolutionary wiresafe technology. Designed to protect all ports from overloading, short circuits and electrical surges, ensuring lighting systems stay as safe as possible. In turn conforming to BS7671 Regulations.

The new Konec connectors on each components are designed to only fit into the respective ports further enhancing safety. Offering this balance of maximum safety and simplicity means less need for electrical qualifications on installation, saving you time and money on your next lighting project.

We have a range of drivers with a range of up to 7 connection ports and can power up to 100 watts worth of LED Lights in one 24 Volt lighting system. Full customisable with UK plugs available in 3 lengths, extension cables and a range of lighting you will be sure to find something suitable for your needs.



# KINETIC WIRELESS SWITCHING



## KINETIC SYSTEM OVERVIEW



Push switch to create kinetic energy



Internal module collects kinetic energy



Kinetic energy is converted into electricity



Communication module transmits signal



Receiver controls light and switches on/off

The wireless switch uses micro-energy acquisition technology. Kinetic energy is generated to create and transmit a radio signal to the receiver which in turn, will switch lamps or other loads on or off.

There is no longer the constraint of wiring location and no need to install back boxes or cut holes into walls. The kinetic switch can be installed anywhere or placed to maximise convenience.

Lighting can be controlled manually by using the switch, smart phone or tablet using the Smart Life App or connecting it to a voice controlled device such as Amazon Alexa or Google Home.

The kinetic switches require no wiring or batteries which eliminates the need for installing back boxes, creating channels in walls and adjusting decor, thus speeding up the installation process and reducing labour time & costs.

The switch can be installed anywhere in the home, including the bathroom due to its IP67 rating. The switches can be screwed to the surface, or stuck on with the adhesive pads supplied. They can also be retro-fit onto existing back boxes as they are the same size as standard switches.



## 1/2/3 GANG SWITCH

- IP65 rated
- For use with 40038, 40039 & 40040 (dimmable by app only with 40040)
- 12-150m Range

| Code         | Description                     | Finish |
|--------------|---------------------------------|--------|
| CUL-40031-65 | 1 gang self powered wall switch | White  |
| CUL-40032-65 | 1 gang self powered wall switch | Black  |
| CUL-40033-65 | 2 gang self powered wall switch | White  |
| CUL-40034-65 | 2 gang self powered wall switch | Black  |
| CUL-40035-65 | 3 gang self powered wall switch | White  |
| CUL-40036-65 | 3 gang self powered wall switch | Black  |



## GRID SWITCH

NEW

- IP20 rated
- No wiring required
- Switches compatible with industry leading grids
- Dimmable switch for use with dimmable receiver only

| Code      | Description                              | Finish |
|-----------|--|--------|
| CUL-42495 | 1 Gang Slim Grid Kinetic Switch          | White  |
| CUL-42497 | 1 Gang Dimmable Slim Grid Kinetic Switch | White  |

## GRID SWITCH SURROUNDS

NEW

- For use with grid switches

| Code      | Description                               | Finish |
|-----------|---|--------|
| CUL-42499 | 1 Gang Kinetic Switch Frame For Slim Grid | White  |
| CUL-42501 | 2 Gang Kinetic Switch Frame For Slim Grid | White  |

Illustration shows CUL-42501 - 2 gang kinetic switch frame with 2 x kinetic switches (CUL-42495/42497) inserted.





## 1 GANG FOB SWITCH

NEW

- IP65 rated
- 8-40m range
- No battery or wiring required
- Silicone finish

| Code      | Description       | Finish |
|-----------|-------------------|--------|
| CUL-40037 | 1 gang fob switch | Grey   |



## NON-DIMMABLE RF RECEIVER

NEW

- IP20 rated
- 8-40m range

| Code      | Description              | Finish |
|-----------|--------------------------|--------|
| CUL-40038 | Non-dimmable RF receiver | White  |



## NON-DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Alexa



Google Home



Tuya Smartlife

| Code      | Description                 | Finish |
|-----------|-----------------------------|--------|
| CUL-40039 | Non-dimmable Wi-Fi receiver | White  |



## DIMMABLE WI-FI RECEIVER

NEW

- IP20 rated
- 8-40m range
- Compatible with alexa, google home using the smart life app



Alexa



Google Home



Tuya Smartlife

| Code      | Description             | Finish |
|-----------|-------------------------|--------|
| CUL-40040 | Dimmable Wi-Fi receiver | White  |


350  
Lumens



- Brushed steel finish
- 5W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

## SLIMLINE

Under Cabinet Spotlight



| Code      | Finish        | Description                      | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                   |
|-----------|---------------|----------------------------------|-----------|------------|-----------------|------------------------------|
| CUL-37797 | Brushed Steel | Slimline Under Cabinet Spotlight | 5W        | 3000k      | 350             | L:190mm x W:70mm<br>Proj:4mm |
| CUL-37798 | Brushed Steel |                                  |           | 4000k      |                 |                              |



**150  
Lumens**




- Brushed steel finish
- Designed for surface mounting or recessed
- 1.8W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



## RECESSED/SURFACE

### Under Cabinet Spotlight



| Code      | Finish        | Description                              | Power (w) | Colour (k) | Total Flux (lm) | Dimensions      |
|-----------|---------------|--|-----------|------------|-----------------|-----------------|
| CUL-37795 | Brushed Steel | Recessed/Surface Under Cabinet Spotlight | 1.8W      | 3000k      | 150             | Dia:65mm H:10mm |
| CUL-37796 | Brushed Steel |  |           | 4000k      |                 |                 |

Upto  
460  
Lumens



- Infrared sensor ideal for kitchen drawers and wardrobes
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install

## IR MINI

### Under Cabinet/Drawer Light



| Code      | Finish        | Description                        | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                      |
|-----------|---------------|------------------------------------|-----------|------------|-----------------|---------------------------------|
| CUL-37787 | Brushed Steel | IR Mini Under Cabinet/Drawer Light | 3.5W      | 3000k      | 220             | L:563mm x W:13mm<br>Proj:15.5mm |
| CUL-37788 | Brushed Steel |                                    |           | 4000k      |                 |                                 |
| CUL-37789 | Brushed Steel |                                    | 5.2W      | 3000k      | 460             | L:863mm x W:13mm<br>Proj:15.5mm |
| CUL-37790 | Brushed Steel |                                    |           | 4000k      |                 |                                 |



Upto  
934  
Lumens



- Flexible 12W/m LED COB tape
- CRI: >90
- Can be cut every 60mm
- 5m roll
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Requires power cord
- Easy to install



## 8MM LED COB Flexible Strip



| Code      | Description                | Power (w) | Colour (k) | CRI | Total Flux (lm) | Length |
|-----------|----------------------------|-----------|------------|-----|-----------------|--------|
| ELA-35750 | 8mm LED COB Flexible Strip | 12W/m     | 3000k      | >90 | 150             | 5m     |
| ELA-37551 |                            |           | 4000k      | >90 |                 |        |




100  
Lumens



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



## ROUND Plinth Light



| Code      | Finish      | Description        | Power (w) | Colour (k) | Total Flux (lm) | Dimensions           |
|-----------|-------------|--------------------|-----------|------------|-----------------|----------------------|
| CUL-37791 | Matt Silver | Round Plinth Light | 1.2W      | 3000k      | 100             | Dia:35mm<br>H:13.5mm |
| CUL-37792 | Matt Silver |                    |           | 4000k      |                 |                      |


100 Lumens



- Matt silver finish
- Super slim profile
- 1.2W (SMD) LED
- Available in warm white (3000k) and cool white (4000k)
- Plug & Play with Konect drivers
- Easy to install



# SQUARE Plinth Light



| Code      | Finish      | Description         | Power (w) | Colour (k) | Total Flux (lm) | Dimensions             |
|-----------|-------------|---------------------|-----------|------------|-----------------|------------------------|
| CUL-37793 | Matt Silver | Square Plinth Light | 1.2W      | 3000k      | 100             | L:35mm W:35mm H:13.5mm |
| CUL-37794 | Matt Silver |                     |           | 4000k      |                 |                        |

## 60W/24V DRIVER/CONVERTER



- Plug & Play with Konec sensors, dimmers and lighting
- Driver applies to BS7671 regulations

| Code      | Input      | Output | Load | Output Sockets | Dimensions            |
|-----------|------------|--------|------|----------------|-----------------------|
| CUL-37770 | AC200-240V | 24V    | 60W  | 7 ports        | L:189mm W:55mm H:15mm |

## 100W/24V DRIVER/CONVERTER



- Plug & Play with Konec sensors, dimmers and lighting
- Driver applies to BS7671 regulations


| Code      | Input      | Output | Load | Output Sockets | Dimensions            |
|-----------|------------|--------|------|----------------|-----------------------|
| CUL-37771 | AC200-240V | 24V    | 100W | 7 ports        | L:239mm W:56mm H:18mm |

## MICRO DISTRIBUTOR




- Connect up to 6 accessories using 1 port from your driver

| Code      | Connector | Cable Length | Output Sockets | Dimensions           |
|-----------|-----------|--------------|----------------|----------------------|
| CUL-37786 | Micro24   | 140mm        | 6 ports        | L:60mm W:45mm H:45mm |



### POWER CONNECTOR

| Code      | Description                                      |
|-----------|--|
| CUL-37801 | 8mm COB dupont to strip soldering free connector |



### STRIP TO STRIP WIRE CONNECTOR

| Code      | Description   |
|-----------|---|
| CUL-37802 | 8mm COB strip to wire to strip soldering free connector |




### STRIP TO STRIP CONNECTOR

| Code      | Description                                     |
|-----------|---|
| CUL-37803 | 8mm COB strip to strip soldering free connector |



### UK PLUG TO 'FIGURE-8' (C7) TYPE MAINS LEAD

| Code      | Input      | Cable Length | Colour |
|-----------|------------|--------------|--------|
| CUL-37783 | AC200-240V | 1000mm       | White  |
| CUL-37784 | AC200-240V | 1500mm       | White  |
| CUL-37785 | AC200-240V | 1800mm       | White  |



### EXTENSION CABLE

| Code      | Connector                      | Cable Length | Colour |
|-----------|--------------------------------|--------------|--------|
| CUL-37772 | Micro 24 male/female connector | 1200mm       | White  |
| CUL-37773 | Micro 24 male/female connector | 1800mm       | White  |
| CUL-37774 | Micro 24 male/female connector | 2400mm       | White  |

# KONECT SENSORS



## IR DOOR SENSOR

The infrared door sensor automatically senses when the cupboard door is opened and switches the light on, and when the cupboard door is shut the lights are instantly switched off, saving energy and money.

| Code      | Control Mode | Max Load | Cable Length |
|-----------|--------------|----------|--------------|
| CUL-37775 | Master       | –        | 1500mm       |
| CUL-37776 | Channel      | 60W      | 2 x 1500mm   |



## HAND MOTION SENSOR

Simply swipe your hand below the sensor within a 8cm distance enabling you to switch on and off any lighting without touching any buttons.

| Code      | Control Mode | Max Load | Cable Length |
|-----------|--------------|----------|--------------|
| CUL-37781 | Master       | –        | 1500mm       |
| CUL-37782 | Channel      | 60W      | 2 x 1500mm   |



## PIR SENSOR

Turns on the lighting when movement is detected within a 3m distance. The sensor has a 35 second timing delay so once no further movement is detected the lighting will power off. This can be recessed or mounted flush with the extra bracket provided.



| Code      | Control Mode | Max Load | Cable Length |
|-----------|--------------|----------|--------------|
| CUL-37777 | Master       | –        | 1500mm       |
| CUL-37778 | Channel      | 60W      | 2 x 1500mm   |



## TOUCH SENSOR

The touch sensor features a blue backlit light has a slimline design and is great for a recessed application. Short touch for on/off function or long press for dimming.



| Code      | Control Mode | Max Load | Cable Length |
|-----------|--------------|----------|--------------|
| CUL-37779 | Master       | –        | 1500mm       |
| CUL-37780 | Channel      | 60W      | 2 x 1500mm   |


IP54



- 2W Bluetooth speaker
- 2 x USB charging ports
- 2 x power outlets
- Qi charger
- IP54 rated
- NOTE: finish is grey not black, images for illustration purposes only

## POP UP

Socket with Bluetooth Speaker



| Code      | Finish | Description                          | USB Ports | Speaker | Dimensions                       |
|-----------|--------|--------------------------------------|-----------|---------|----------------------------------|
| CUL-37800 | Grey   | Pop Up Socket with Bluetooth Speaker | 2 x 4.5W  | 1 x 2W  | H:260mm (extended)<br>Dia:99.5mm |

**NEW**  
FOR  
2023



- Ceiling cup to track insert supplied with 0.5m cable and 1m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads  
330° rotation and 90° tilt
- Matching compatible track in the range

## CAYO

### 3 Head Track Light Kit



| Code          | Description                 | Colour | Lamp                | Dimensions          |
|---------------|-----------------------------|--------|---------------------|---------------------|
| INL-41730-BLK | Cayo 3 Head Track Light Kit | Black  | 3 x 7W max LED GU10 | L:1000mm Proj:180mm |
| INL-41730-WHT | Cayo 3 Head Track Light Kit | White  | 3 x 7W max LED GU10 | L:1000mm Proj:180mm |



NEW  
FOR  
2023



- Ceiling cup to track insert supplied with 0.5m cable and 2 x 0.8m track
- Constructed from steel & ABS plastic
- Available in 2 finishes
- Fully adjustable lamp heads  
330° rotation and 90° tilt
- Matching compatible track in the range

## CAYO

### 5 Head Track Light Kit



Class 1



2.07kg

| Code          | Description                 | Colour | Lamp                | Dimensions             |
|---------------|-----------------------------|--------|---------------------|------------------------|
| INL-41731-BLK | Cayo 5 Head Track Light Kit | Black  | 5 x 7W max LED GU10 | 2 x L:800mm Proj:180mm |
| INL-41731-WHT | Cayo 5 Head Track Light Kit | White  | 5 x 7W max LED GU10 | 2 x L:800mm Proj:180mm |



- 220-240V
- Die-cast Aluminium and ABS construction
- Includes 1 x live end & 1 x dead end

## TOR

### Single Circuit Track



| Code          | Description              | Colour | Length | Dimensions                |
|---------------|--------------------------|--------|--------|---------------------------|
| CUL-21637-WHT | Tor Single Circuit Track | White  | 1000mm | L:1000mm W:37mm Proj:17mm |
| CUL-21638-WHT | Tor Single Circuit Track | White  | 1500mm | L:1500mm W:37mm Proj:17mm |
| CUL-21639-WHT | Tor Single Circuit Track | White  | 2000mm | L:2000mm W:37mm Proj:17mm |
| CUL-26333-BLK | Tor Single Circuit Track | Black  | 1000mm | L:1000mm W:37mm Proj:17mm |
| CUL-26334-BLK | Tor Single Circuit Track | Black  | 1500mm | L:1500mm W:37mm Proj:17mm |
| CUL-26335-BLK | Tor Single Circuit Track | Black  | 2000mm | L:2000mm W:37mm Proj:17mm |



- For use with Tor Single Circuit Track
- Steel and ABS construction

## LUSTRO

### Track Light



| Code          | Description        | Colour | Lamp                | Dimensions        |
|---------------|--------------------|--------|---------------------|-------------------|
| CUL-21660-WHT | Lustro Track Light | White  | 1 x 7W max LED GU10 | H:103mm Proj:89mm |
| CUL-26346-BLK | Lustro Track Light | Black  | 1 x 7W max LED GU10 | H:103mm Proj:89mm |



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

## LUCIDO Track Light



Class 1



0.13kg

| Code          | Description        | Colour | Lamp                | Dimensions        |
|---------------|--------------------|--------|---------------------|-------------------|
| CUL-21658-WHT | Lucido Track Light | White  | 1 x 7W max LED GU10 | H:135mm Proj:75mm |
| CUL-26345-BLK | Lucido Track Light | Black  | 1 x 7W max LED GU10 | H:135mm Proj:75mm |



- For use with Tor Single Circuit Track
- Die-cast Aluminium and ABS construction

## RIBALTA Track Light



Class 1



0.29kg

| Code          | Description         | Colour | Lamp                | Dimensions        |
|---------------|---------------------|--------|---------------------|-------------------|
| CUL-21656-WHT | Ribalta Track Light | White  | 1 x 7W max LED GU10 | H:200mm Proj:78mm |
| CUL-26344-BLK | Ribalta Track Light | Black  | 1 x 7W max LED GU10 | H:200mm Proj:78mm |

# TRACK ACCESSORIES



PENDANT  
ADAPTER  
FITS FLUSH  
IN TRACK

| White     | Black     | Description               | Dimensions                |
|-----------|-----------|---------------------------|---------------------------|
| CUL-26342 | CUL-26341 | Flexible Connector        | L:296mm W:35mm Proj:17mm  |
| CUL-21645 | CUL-26337 | Double Live End Connector | L:184mm W:35mm Proj:17mm  |
| CUL-33996 | CUL-33996 | Track Pendant Adapter     | L:81mm W:34mm Proj:46mm   |
| CUL-21651 | CUL-26339 | T Live End Connector      | L:109mm W:183mm Proj:17mm |
| CUL-21649 | CUL-26340 | X Live End Connector      | L:183mm W:183mm Proj:17mm |
| CUL-21647 | CUL-26338 | L Live End Connector      | L:109mm W:109mm Proj:17mm |
| CUL-21643 | CUL-26336 | Butt Connector            | L:79mm W:35mm Proj:17mm   |
| CUL-21653 | CUL-26332 | Track Pendant Adapter     | L:39mm W:36mm Proj:46mm   |








**20  
Lumens**

- Mains connected - no driver required
- Brushed steel finish with opal polycarbonate diffuser
- Available in 3000K/6000K
- 0.5W LED module (SMD)



## OHIO

### Circular Plinth Light

 IP65 Rated | 
  35mm Cut-out | 
  1M Cable | 
  Class 2 | 
  0.13kg

| Code         | Description                      | Lamp     | Kelvin | Lumen | Dimensions |
|--------------|----------------------------------|----------|--------|-------|------------|
| CUL-26465-WW | Ohio Circular 240V Decking Light | 0.5W LED | 3000   | 20    | Dia:40mm   |
| CUL-26465    | Ohio Circular 240V Decking Light | 0.5W LED | 6000   | 20    | Dia:40mm   |



**Upto  
6000  
Lumens**

**NO  
DRIVER  
REQ.**



· 7mm clip



· 20mm clip

- Aluminium body with polycarbonate diffuser
- No driver required
- Available in 3000k/4000k/6000k
- Available in 5 different lengths
- Kit includes: 1 x light fitting, 2 x 7mm clips, 2 x 20mm clips, instructions and fixing kit
- Optional suspension kit available

## RENO

### LED Batten



Class 2

| Code      | Description | Power (w) | Colour (k) | Total Flux (lm) | Length | Dimensions                |
|-----------|-------------|-----------|------------|-----------------|--------|---------------------------|
| CUL-30700 |             | 30W LED   | 3000       | 2690            | 900mm  | L:900mm W:75mm Proj:24mm  |
| CUL-30702 |             | 40W LED   | 3000       | 3600            | 1200mm | L:1200mm W:75mm Proj:24mm |
| CUL-30699 |             | 20W LED   | 4000       | 1850            | 600mm  | L:600mm W:75mm Proj:24mm  |
| CUL-30701 |             | 30W LED   | 4000       | 2730            | 900mm  | L:900mm W:75mm Proj:24mm  |
| CUL-30703 |             | 40W LED   | 4000       | 3650            | 1200mm | L:1200mm W:75mm Proj:24mm |
| CUL-30704 |             | 60W LED   | 3000       | 5200            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30707 |             | 80W LED   | 3000       | 6600            | 1800mm | L:1800mm W:75mm Proj:24mm |
| CUL-30705 |             | 60W LED   | 4000       | 5300            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30708 |             | 80W LED   | 4000       | 6700            | 1800mm | L:1800mm W:75mm Proj:24mm |
| CUL-30706 |             | 60W LED   | 6000       | 5500            | 1500mm | L:1500mm W:75mm Proj:24mm |
| CUL-30709 |             | 80W LED   | 6000       | 6900            | 1800mm | L:1800mm W:75mm Proj:24mm |

# RENO

Suspension Kit



| Code      | Description            | Dimensions |
|-----------|------------------------|------------|
| CUL-30710 | Reno 1m Suspension Kit | L:1000mm   |
| CUL-30711 | Reno 2m Suspension Kit | L:2000mm   |





## INDOOR

Indoor lighting including a comprehensive range of decorative cable sets, shades and our new Illuminate task lighting. LED Lamps with attractive design and energy saving performance, INLIGHT LED lamps superbly compliment the Forum Lighting range.

|                |         |
|----------------|---------|
| PLASTER LIGHTS | 342-347 |
| SPOTLIGHTS     | 348-353 |
| RECESSED       | 354-357 |
| PICTURE LIGHT  | 359     |
| TASK LIGHTING  | 360-361 |
| CABLE SETS     | 362-369 |
| SHADES         | 371-373 |
| LED LAMPS      | 374-385 |


**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## UBEDA

Downlight



| Code          | Lamp                | Dimensions          |
|---------------|---------------------|---------------------|
| INL-37213-WHT | 1 x 7W max LED GU10 | Dia:70mm<br>H:110mm |

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## CADIZ

Tiltable Downlight



| Code          | Lamp                | Dimensions           |
|---------------|---------------------|----------------------|
| INL-37214-WHT | 1 x 7W max LED GU10 | Dia:135mm<br>H:160mm |

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## CABRA

Flush Downlight



| Code          | Lamp                | Dimensions          |
|---------------|---------------------|---------------------|
| INL-37211-WHT | 1 x 7W max LED GU10 | Dia:130mm<br>H:50mm |



**PAINT  
TO MATCH  
DECOR**

- White plaster finish
- Can be painted to match decor

## CARMONA

Up/Down Wall Light



Class 1



0.95kg

| Code          | Description                | Finish | Lamp                | Dimensions               |
|---------------|----------------------------|--------|---------------------|--------------------------|
| INL-37225-WHT | Carmona Up/Down Wall Light | White  | 2 x 7W max LED GU10 | H:250mm W:70mm Proj:95mm |



**PAINT  
TO MATCH  
DECOR**

- White plaster finish
- Can be painted to match decor

## GETXO

Up/Down Wall Light




Class 1



1.70kg

| Code          | Description              | Finish | Lamp                      | Dimensions                |
|---------------|--------------------------|--------|---------------------------|---------------------------|
| INL-37226-WHT | Getxo Up/Down Wall Light | White  | 2 x 6W max LED E14 Candle | H:70mm W:350mm Proj:105mm |

**PAINT**  
TO MATCH  
DECOR

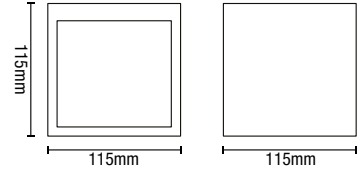

- White plaster finish
- Can be painted to match decor

## MONTILLA

Up/Down Light




Class 1



0.8kg

| Code          | Lamp                 | Dimensions                    |
|---------------|----------------------|-------------------------------|
| INL-37219-WHT | 1 x 3W max<br>LED G9 | H:115mm W:115mm<br>Proj:115mm |

**PAINT**  
TO MATCH  
DECOR

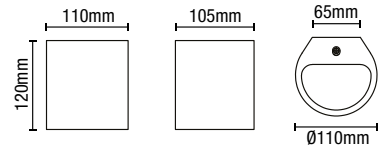

- White plaster finish
- Can be painted to match decor

## OSUNA

Up/Down Light




Class 1



0.8kg

| Code          | Lamp                 | Dimensions                    |
|---------------|----------------------|-------------------------------|
| INL-37224-WHT | 1 x 3W max<br>LED G9 | H:120mm W:110mm<br>Proj:105mm |

**PAINT**  
TO MATCH  
DECOR

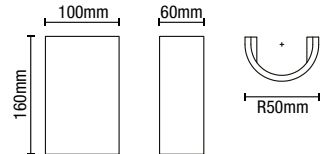

- White plaster finish
- Can be painted to match decor

## MARTOS

Up/Down Light




Class 1



0.5kg

| Code          | Lamp                 | Dimensions                   |
|---------------|----------------------|------------------------------|
| INL-37221-WHT | 1 x 3W max<br>LED G9 | H:160mm W:100mm<br>Proj:60mm |

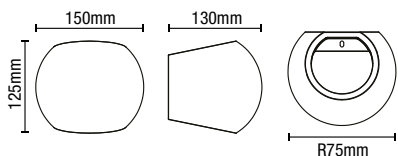

- White plaster finish
- Can be painted to match decor

**PAINT**  
TO MATCH  
DECOR



## MARTOS

Round Up/Down Light




Class 1



0.95kg

| Code          | Lamp              | Dimensions                  |
|---------------|-------------------|-----------------------------|
| INL-37222-WHT | 1 x 3W max LED G9 | H:1205mm W:150mm Proj:130mm |



- White plaster finish
- Can be painted to match decor

**PAINT**  
TO MATCH  
DECOR



## BAZA

Up/Down Light




Class 1



1.2kg

| Code          | Lamp                      | Dimensions                |
|---------------|---------------------------|---------------------------|
| INL-37220-WHT | 1 x 6W max LED E14 Candle | H:75mm W:300mm Proj:100mm |



- White plaster finish
- Can be painted to match decor

**PAINT**  
TO MATCH  
DECOR



## RHONDA

Up/Down Light



Class 1



1.05kg

| Code          | Lamp                      | Dimensions                  |
|---------------|---------------------------|-----------------------------|
| INL-37223-WHT | 1 x 6W max LED E14 Candle | H:95mm W:245mm Proj:122.5mm |

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## TELDE

Wall Uplighter




| Code          | Lamp                       | Dimensions                    |
|---------------|----------------------------|-------------------------------|
| INL-38609-WHT | 1 x 10W max LED<br>E27 GLS | H:105mm W:425mm<br>Proj:212mm |

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor



## MAO

Wall Uplighter



| Code          | Lamp                       | Dimensions                    |
|---------------|----------------------------|-------------------------------|
| INL-38610-WHT | 1 x 10W max LED<br>E27 GLS | H:125mm W:250mm<br>Proj:127mm |

**PAINT**  
TO MATCH  
DECOR



- White plaster finish
- Can be painted to match decor

## ARUCAS


Wall Uplighter



| Code          | Lamp                         | Dimensions                     |
|---------------|------------------------------|--------------------------------|
| INL-38611-WHT | 1 x 6W max LED<br>E14 Candle | H:170mm W:3535mm<br>Proj:158mm |







- White plaster finish
- Integral LED option

**PAINT**  
TO MATCH  
DECOR




## TOLEDO

### Wall Uplighter



| Code          | Lamp                   | Dimensions                   |
|---------------|------------------------|------------------------------|
| INL-38612-WHT | 2 x 7W max LED<br>GU10 | H:245mm W:137mm<br>Proj:78mm |
| INL-38613-WHT | 2 x 3W integral<br>LED | H:245mm W:137mm<br>Proj:78mm |

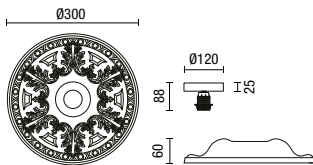

- White plaster finish
- Can be painted to match decor

**PAINT**  
TO MATCH  
DECOR




## MOTRIL

### Plaster Ceiling Mount



| Code          | Lamp                       | Dimensions       |
|---------------|----------------------------|------------------|
| INL-37215-WHT | 1 x 10W max LED<br>E27 GLS | H:60mm Dia:300mm |
| INL-37216-WHT | E27 GLS                    | H:85mm Dia:500mm |

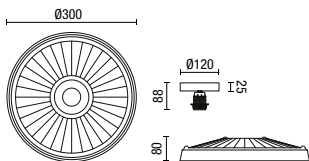

- White plaster finish
- Can be painted to match decor

**PAINT**  
TO MATCH  
DECOR



## LUCENA

### Plaster Ceiling Mount



| Code          | Lamp                       | Dimensions       |
|---------------|----------------------------|------------------|
| INL-37217-WHT | 1 x 10W max LED<br>E27 GLS | H:60mm Dia:300mm |
| INL-37218-WHT | E27 GLS                    | H:80mm Dia:550mm |



- Satin nickel and chrome finish
- Contemporary styling
- ON/OFF toggle switch

## ELARA

### Wall Spotlight



Class 1



0.4kg

| Code            | Description          | Lamp                | Dimensions              |
|-----------------|----------------------|---------------------|-------------------------|
| INL-740000-SNIC | Elara Wall Spotlight | 1 x 7W max LED GU10 | L:110mm W:100mm H:115mm |



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

## ELARA

### 4 Light Bar Spotlight



Class 1



1.33kg

| Code            | Description                 | Lamp                | Dimensions              |
|-----------------|-----------------------------|---------------------|-------------------------|
| INL-598410-SNIC | Elara 4 Light Bar Spotlight | 4 x 7W max LED GU10 | L:800mm W:165mm H:145mm |



- Satin nickel and chrome finish
- Contemporary styling
- Adjustable lamps

## ELARA

### 3 Light Plate Spotlight



| Code            | Description                   | Lamp                | Dimensions        |
|-----------------|-------------------------------|---------------------|-------------------|
| INL-598310-SNIC | Elara 3 Light Plate Spotlight | 3 x 7W max LED GU10 | H:115mm Dia:290mm |



**3**  
SIZES  
AVAILABLE



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

## PEDRO

### Spotlight



| Code           | Description                   | Lamp                | Weight | Dimensions        |
|----------------|-------------------------------|---------------------|--------|-------------------|
| INL-28201-BCHR | Pedro Wall/Ceiling Spotlight  | 1 x 7W max LED GU10 | 0.5kg  | H:120mm Dia:100mm |
| INL-28202-BCHR | Pedro 2 Light Plate Spotlight | 2 x 7W max LED GU10 | 1.1kg  | H:120mm Dia:190mm |
| INL-28203-BCHR | Pedro 3 Light Plate Spotlight | 3 x 7W max LED GU10 | 1.2kg  | H:120mm Dia:260mm |



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

## PEDRO

### 4 Light Plate Spotlight



Class 1



1.65kg

| Code           | Description                   | Lamp                | Dimensions              |
|----------------|-------------------------------|---------------------|-------------------------|
| INL-28205-BCHR | Pedro 4 Light Plate Spotlight | 4 x 7W max LED GU10 | W:220mm L:220mm H:120mm |

2  
SIZES  
AVAILABLE



- Black Chrome finish
- Contemporary styling
- Adjustable lamps

## PEDRO

### Bar Spotlight



Class 1

| Code           | Description                 | Lamp                | Weight | Dimensions              |
|----------------|-----------------------------|---------------------|--------|-------------------------|
| INL-31790-BCHR | Pedro 6 Light Bar Spotlight | 6 x 7W max LED GU10 | 2.92kg | L:100mm W:900mm H:120mm |



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes



## HARVEY Spotlight



Class 1



0.19kg



Available in  
4 colour options

| Code             | Finish       | Description      | Lamp                | Dimensions             |
|------------------|--------------|------------------|---------------------|------------------------|
| INL-31775-SNIC   | Satin Nickel | Harvey Spotlight | 1 x 7W max LED GU10 | L:100mm W:85mm H:120mm |
| INL-31775-BLK    | Black        |                  |                     |                        |
| INL-31775-WHT    | White        |                  |                     |                        |
| INL-31775-SATBRS | Satin Brass  |                  |                     |                        |

- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes



## HARVEY 3 Light Plate Spotlight



Class 1



0.75kg



Available in  
4 colour options

| Code             | Finish       | Description                 | Lamp                | Dimensions        |
|------------------|--------------|-----------------------------|---------------------|-------------------|
| INL-31776-SNIC   | Satin Nickel | Harvey 3 Light<br>Spotlight | 3 x 7W max LED GU10 | Dia:215mm H:120mm |
| INL-31776-BLK    | Black        |                             |                     |                   |
| INL-31776-WHT    | White        |                             |                     |                   |
| INL-31776-SATBRS | Satin Brass  |                             |                     |                   |



- Contemporary styling
- Ceiling or wall mounted
- 350° rotation
- Available in 4 finishes

## HARVEY

### 4 Light Bar Spotlight



Class 1



0.75kg



Available in  
4 colour options

| Code             | Finish       | Description                  | Lamp                | Dimensions             |
|------------------|--------------|------------------------------|---------------------|------------------------|
| INL-31723-SNIC   | Satin Nickel | Harvey 4 Light Bar Spotlight | 4 x 7W max LED GU10 | L:774mm W:85mm H:120mm |
| INL-31723-BLK    | Black        |                              |                     |                        |
| INL-31723-WHT    | White        |                              |                     |                        |
| INL-31723-SATBRS | Satin Brass  |                              |                     |                        |



IP65



Tilted







Fixed



- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes

## CALI

### Tiltable Downlight

| Code            | Description             | Finish         | Lamp                | Dimensions                         |
|-----------------|-------------------------|----------------|---------------------|------------------------------------|
| SPA-30841-BRCOP | Cali Tiltable Downlight | Brushed Copper | 1 x 7W max LED GU10 | Dia:92mm<br>H:115mm<br>Cutout:78mm |
| SPA-30841-MWHT  |                         | Matt White     |                     |                                    |
| SPA-30841-MBLK  |                         | Matt Black     |                     |                                    |
| SPA-30842-CHR   |                         | Chrome         |                     |                                    |
| SPA-30842-SBRS  |                         | Satin Brass    |                     |                                    |
| SPA-30842-SCHR  |                         | Satin Chrome   |                     |                                    |

IP65



Tilted



Fixed




- Die-cast aluminium with glass lens
- Adjustable tilt, max 40°
- Available in 6 finishes




## CALI

### Square Tiltable Downlight



| Code            | Description                    | Finish         | Lamp                | Dimensions                                     |
|-----------------|--------------------------------|----------------|---------------------|--|
| SPA-38577-BRCOP | Cali Square Tiltable Downlight | Brushed Copper | 1 x 7W max LED GU10 | L:82mm<br>W:82mm<br>H:115mm<br><br>Cutout:78mm |
| SPA-35724-MWHT  |                                | Matt White     |                     |  |
| SPA-35725-MBLK  |                                | Matt Black     |                     |  |
| SPA-35727-CHR   |                                | Chrome         |                     |  |
| SPA-35723-SBRS  |                                | Satin Brass    |                     |  |
| SPA-35726-SCHR  |                                | Satin Chrome   |                     |  |

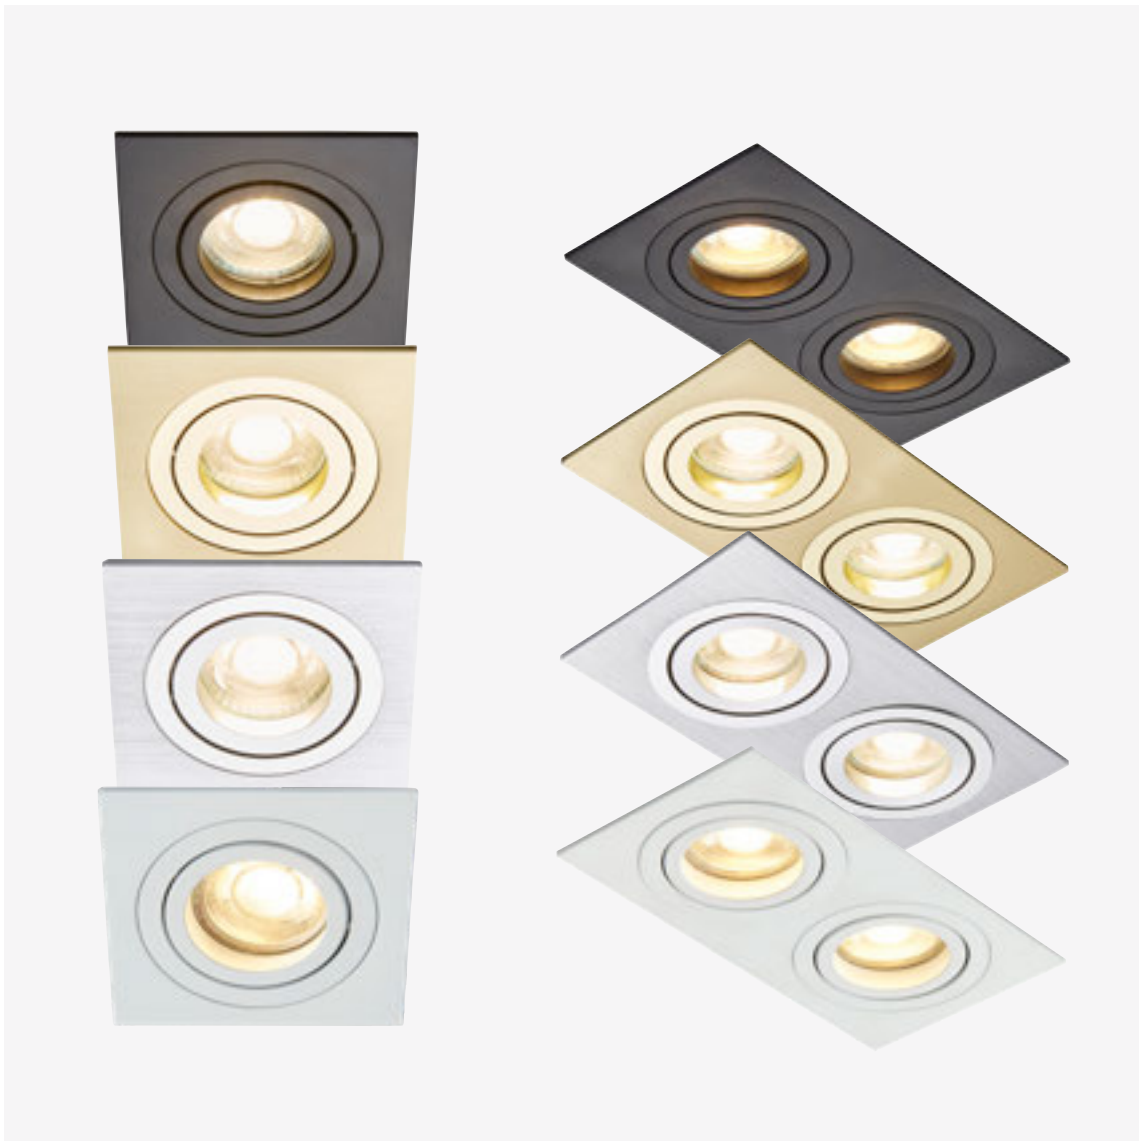

# PASTO

## Adjustable Downlight





| Code             | Description                       | Finish          | Lamp                | Dimensions                                |
|------------------|-----------------------------------|-----------------|---------------------|---|
| INL-38617-BLK    | Pasto Single Adjustable Downlight | Black           | 1 x 7W max LED GU10 | L:92mm W:92mm H:3mm<br>Cutout:80mm        |
| INL-38617-POLBRS |                                   | Polished Brass  |                     |   |
| INL-38617-POLSIL |                                   | Polished Silver |                     |   |
| INL-38617-WHT    |                                   | White           |                     |   |
| INL-38618-BLK    | Pasto Double Adjustable Downlight | Black           | 2 x 7W max LED GU10 | L:174mm W:92mm H:3mm<br>Cutout:160 x 80mm |
| INL-38618-POLBRS |                                   | Polished Brass  |                     |   |
| INL-38618-POLSIL |                                   | Polished Silver |                     |   |
| INL-38618-WHT    |                                   | White           |                     |   |



# PASTO

Triple Adjustable Downlight

245 x 80mm Class 2  
Cut-out

| Code          | Description                       | Finish | Lamp                   | Dimensions              |
|---------------|-----------------------------------|--------|------------------------|-------------------------|
| INL-38619-BLK | Pasto Triple Adjustable Downlight | Black  | 3 x 7W max<br>LED GU10 | L:257mm W:92mm<br>H:3mm |
| INL-38619-WHT |                                   | White  |                        | Cutout:245 x 80mm       |



**395**  
Lumens

**IP44**



- Available in 4 finishes
- Pull Switch
- 8W LED module (SMD)
- K: 3000
- Lm: 395
- Lm/W: 70



# CHAI


Picture/Mirror Light

IP44 Rated | 3000K WW | Class 1 | 0.5kg

| Code             | Finish       | Description                            | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Dimensions                      |
|------------------|--------------|--|-----------|------------|-----------------|-------------------|---------------------------------|
| SPA-30993-CHR    | Chrome       | Chai Bathroom Picture/Mirror LED Light | 8W        | 3000k      | 395             | 70                | H:80mm<br>W:410mm<br>Proj:160mm |
| SPA-30993-SNIC   | Satin Nickel |  |           |            |                 |                   |                                 |
| SPA-30993-SATBRS | Satin Brass  |  |           |            |                 |                   |                                 |
| SPA-30993-MBLK   | Matt Black   |  |           |            |                 |                   |                                 |

610  
Lumens

3x

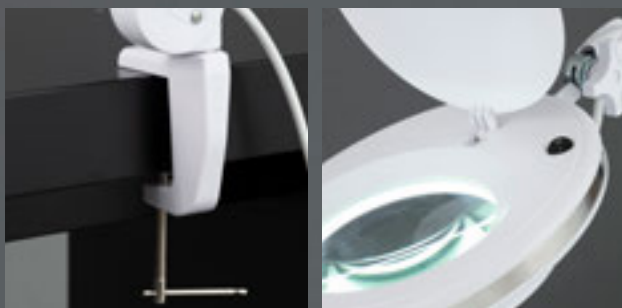

- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 8W LED module (SMD)
- K: 6000
- Lm: 610
- Lm/W: 76



- Task lamp simply slots into stand

## BUDA

LED Task Lamp



1.5M  
Cable



6000K  
DW



Class 2



2.46kg

| Code          | Description        | Lamp   | Finish     | Dimensions               |
|---------------|--------------------|--------|------------|--------------------------|
| INL-34557-WHT | Buda LED Task Lamp | 8W LED | Matt White | L:400mm W:210mm H:1000mm |



1100  
Lumens

3x

- 1.5 meter cable with BS1636 plug
- 3 flexibility joints for full adjustability
- 5" optical lens with 3x magnification
- Supplied with C-clamp base
- Optional floor stand available (ILL-34557-WHT)
- On/Off Rocker Switch
- 22W T4 Fluorescent lamp - included
- Lm: 1100

## BUDA

Task Lamp



1.5M  
Cable



Class 2



2.46kg

| Code          | Description    | Lamp               | Finish     | Dimensions               |
|---------------|----------------|--------------------|------------|--------------------------|
| INL-34556-WHT | Buda Task Lamp | 22W T4 Fluorescent | Matt White | L:415mm W:200mm H:1000mm |

# RIMINI

E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 3 finishes
- Max cable height 1000mm including ceiling cup and lampholder

| Code           | Finish         | Description         | Lamp                       | Dimensions           |
|----------------|----------------|---------------------|----------------------------|----------------------|
| INL-37894-BCOP | Brushed Copper | Lampholder<br>Flush | 1 x max 10W LED<br>E27 GLS | Dia:105mm<br>H:100mm |
| INL-37894-PEW  | Pewter         |                     |                            |                      |
| INL-37894-BRZ  | Bronze         |                     |                            |                      |

# DALE

## E27/ES CABLE SET



- Fits E27 lamps
- Adjustable height
- Available in 4 finishes
- Vintage styling
- Lamps supplied separately

| Code           | Description | Finish                                 | Lamp            | Dimensions         |
|----------------|-------------|--|-----------------|--------------------|
| INL-23519-BLK  | Cable Set   | Black Nickel with Black Twisted cable  | 1 x 42W Max E27 | Dia:118mm H:1100mm |
| INL-23519-GRY  | Cable Set   | Black Nickel with Grey Twisted cable   | 1 x 42W Max E27 | Dia:118mm H:1100mm |
| INL-23519-RED  | Cable Set   | Polished Nickel with Red Twisted cable | 1 x 42W Max E27 | Dia:118mm H:1100mm |
| INL-23519-HERR | Cable Set   | Polished Nickel with Herringbone cable | 1 x 42W Max E27 | Dia:118mm H:1100mm |



# DALE

## E27/ES CABLE SET



- Fits E27 lamps
- Can be fitted to almost any easyfit shade
- Adjustable height
- Available in 5 finishes
- Vintage styling
- Lamps supplied separately

| Code           | Description  | Lamp            | Dimensions         |
|----------------|--|-----------------|--------------------|
| INL-27988-ABRS | Antique Brass Cable Set with Champagne Twisted Cable | 1 x 42W Max E27 | Dia:105mm H:1000mm |
| INL-27988-ACOP | Antique Copper Cable Set with Black Twisted Cable    | 1 x 42W Max E27 | Dia:105mm H:1000mm |
| INL-27988-PEW  | Pewter Cable Set with Black Twisted Cable            | 1 x 42W Max E27 | Dia:105mm H:1000mm |
| INL-27988-BRZ  | Bronze Cable Set with Black Twisted Cable            | 1 x 42W Max E27 | Dia:105mm H:1000mm |
| INL-27988-SNIC | Satin Nickel Cable Set with Grey Twisted Cable       | 1 x 42W Max E27 | Dia:105mm H:1000mm |



- Height adjustable

## NAPOLI

Rope Cable Set



Class 1



0.4kg

| Code      | Finish         | Description           | Lamp                    | Dimensions            |
|-----------|----------------|-----------------------|-------------------------|-----------------------|
| INL-37839 | Pewter/Natural | Napoli Rope Cable Set | 1 x 10W max LED E27 GLS | H:1050mm<br>Dia:100mm |



- Supplied with hook and loop fixing kit to create your own style
- Height adjustable

## NAPOLI

Rope 6 Light Ceiling Light



Class 1



2.4kg

| Code      | Finish         | Description                       | Lamp                    | Dimensions                     |
|-----------|----------------|-----------------------------------|-------------------------|--------------------------------|
| INL-37829 | Pewter/Natural | Napoli Rope 6 Light Ceiling Light | 6 x 10W max LED E27 GLS | H:1420mm<br>Dia:2550mm (extd.) |





SHADE  
RING



- Supplied with hook and loop fixing kit to create your own style
- Can be fitted with most easyfit shades
- Height adjustable

## PADUA

Ceiling Light



Class 1

| Code           | Finish       | Description                 | Lamp                    | Dimensions                  | Weight |
|----------------|--------------|-----------------------------|-------------------------|-----------------------------|--------|
| INL-37877-ACOP | Copper/Black | Padua 3 Light Ceiling Light | 3 x 10W max LED E27 GLS | Min H:110mm<br>Max H:1180mm | 0.8kg  |
| INL-37878-ACOP | Copper/Black | Padua 5 Light Ceiling Light | 5 x 10W max LED E27 GLS | Min H:110mm<br>Max H:1180mm | 1.3kg  |
| INL-31789-ACOP | Copper/Black | Padua 7 Light Ceiling Light | 7 x 10W max LED E27 GLS | Min H:110mm<br>Max H:2000mm | 1.81kg |



# RIGEL

## DINER SHADES

INL-33818-ACOP



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

INL-33819-ABRS



- Supplied with B22 shade ring adapter
- Cable set not supplied
- Fits INL-27988 E27 cable sets

| Description       | Colour          | Small          | Dimensions       | Large          | Dimensions       |
|-------------------|-----------------|----------------|------------------|----------------|------------------|
| Rigel Diner Shade | Antique Brass   | INL-33818-ABRS | H:67mm Dia:236mm | -              | -                |
| Rigel Diner Shade | Matt Black      | INL-33818-MBLK | H:67mm Dia:236mm | -              | -                |
| Rigel Diner Shade | Polished Nickel | INL-33818-PNIC | H:67mm Dia:236mm | INL-33819-PNIC | H:67mm Dia:360mm |
| Rigel Diner Shade | Antique Copper  | INL-33818-ACOP | H:67mm Dia:236mm | INL-33819-ACOP | H:67mm Dia:360mm |
| Rigel Diner Shade | Matt Grey       | INL-33818-MGRY | H:67mm Dia:236mm | INL-33819-MGRY | H:67mm Dia:360mm |







- Fits E27 lamps
- Perfect replacement for standard ceiling rose pendants

## CEILING ROSE

E27/ES

| Code           | Finish         | Description  | Lamp                    | Dimensions           |
|----------------|----------------|--------------|-------------------------|----------------------|
| INL-34942-ACOP | Antique Copper | Ceiling Rose | 1 x max 10W LED E27 GLS | Dia:180mm<br>H:120mm |
| INL-34942-ABRS | Antique Brass  |              |                         |                      |



SHADE RING



- Fits E27 lamps
- Can be fitted with most easyfit shades
- Space between ceiling and shade ring

## PADUA LAMPHOLDER

E27/ES

| Code           | Finish       | Description      | Lamp                    | Dimensions           |
|----------------|--------------|------------------|-------------------------|----------------------|
| INL-38239-BRZ  | Bronze       | Lampholder Flush | 1 x max 10W LED E27 GLS | Dia:105mm<br>H:100mm |
| INL-38239-PEW  | Pewter       |                  |                         |                      |
| INL-38239-SNIC | Satin Nickel |                  |                         |                      |



- 360° Beam angle
- Dimmable
- Available in amber or smoke






# LARGE VINTAGE LAMPS

E27/ES




INL-34028-SMK



INL-34029-SMK




INL-34030-SMK




INL-34031-SMK




INL-34028-AMB



INL-34029-AMB



INL-34030-AMB



INL-34031-AMB




| Code              | Description                    | Kelvin    | Lumen | Dimensions        |
|-------------------|--------------------------------|-----------|-------|-------------------|
| INL-34028-AMB/SMK | G180 6W LED E27 Filament Lamp  | 2000/4000 | 450   | Dia:180mm H:230mm |
| INL-34029-AMB/SMK | A165 6W LED E27 Filament Lamp  | 2000/4000 | 450   | Dia:165mm H:300mm |
| INL-34030-AMB/SMK | BT180 6W LED E27 Filament Lamp | 2000/4000 | 450   | Dia:180mm H:360mm |
| INL-34031-AMB/SMK | T80 6W LED E27 Filament Lamp   | 2000/4000 | 450   | Dia:80mm H:330mm  |


# VINTAGE LAMPS

E27/ES





**580**  
LUMEN
**DIMMABLE**





**650**  
LUMEN
**DIMMABLE**




**400**  
LUMEN
**DIMMABLE**





**450**  
LUMEN
**DIMMABLE**

| Code                | Description                   | Colour | Kelvin | Lumen | Dimensions       |
|---------------------|-------------------------------|--------|--------|-------|------------------|
| INL-ST64-LED-ES-TNT | ST64 6W E27 LED Filament Lamp | Tinted | 2000   | 580   | Dia:64mm H:140mm |
| INL-ST64-LED-BC-TNT | ST64 6W B22 LED Filament Lamp | Tinted | 2000   | 580   | Dia:64mm H:140mm |
| INL-ST64-LED-ES-CLR | ST64 6W E27 LED Filament Lamp | Clear  | 2000   | 650   | Dia:64mm H:140mm |
| INL-ST64-LED-BC-CLR | ST64 6W B22 LED Filament Lamp | Clear  | 2000   | 650   | Dia:64mm H:140mm |
| INL-G80-LED-ES-TNT  | G80 4W E27 LED Filament Lamp  | Tinted | 2000   | 400   | Dia:80mm H:120mm |
| INL-G80-LED-BC-TNT  | G80 4W B22 LED Filament Lamp  | Tinted | 2000   | 400   | Dia:80mm H:120mm |
| INL-G80-LED-ES-CLR  | G80 4W E27 LED Filament Lamp  | Clear  | 2000   | 450   | Dia:80mm H:120mm |
| INL-G80-LED-BC-CLR  | G80 4W B22 LED Filament Lamp  | Clear  | 2000   | 450   | Dia:80mm H:120mm |


# VINTAGE LAMPS

E27/ES





**580**  
 LUMEN
 DIMMABLE




**650**  
 LUMEN
 DIMMABLE





**165**  
 LUMEN
 DIMMABLE




**180**  
 LUMEN
 DIMMABLE




**350**  
 LUMEN
 DIMMABLE

| Code                 | Description                   | Colour | Kelvin | Lumen | Dimensions       |
|----------------------|-------------------------------|--------|--------|-------|------------------|
| INL-G95-LED-ES-TNT   | G95 6W E27 LED Filament Lamp  | Tinted | 2000   | 580   | Dia:95mm H:140mm |
| INL-G95-LED-ES-CLR   | G95 6W E27 LED Filament Lamp  | Clear  | 2000   | 650   | Dia:95mm H:140mm |
| INL-C35L-LED-SES-TNT | C35L 2W E14 LED Filament Lamp | Tinted | 2000   | 165   | Dia:35mm H:120mm |
| INL-C35L-LED-SES-CLR | C35L 2W E14 LED Filament Lamp | Clear  | 2000   | 180   | Dia:35mm H:120mm |
| INL-A60-LED-ES-TNT   | A60 4W E27 LED Filament Lamp  | Tinted | 2200   | 350   | Dia:60mm H:120mm |

# G9

## COB LED LAMPS



▼  
WARM WHITE  
200 LUMEN



▼  
WARM WHITE  
200 LUMEN  
3 PACK



▼  
WARM WHITE  
200 LUMEN  
6 PACK



▼  
COOL WHITE  
200 LUMEN



▼  
COOL WHITE  
200 LUMEN  
3 PACK



▼  
COOL WHITE  
200 LUMEN  
6 PACK

| Code      | Description   | Cap Type | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Beam Angle | Dimensions         |
|-----------|---------------|----------|-----------|------------|-----------------|-------------------|------------|--------------------|
| INL-38119 | 2W COB LED G9 | G9       | 2W        | 3000k      | 200             | 100lm/W           | 360°       | H:50mm<br>Dia:14mm |
| INL-38120 |               |          |           | Warm White |                 |                   |            |                    |
| INL-38122 |               |          |           | 4500k      |                 |                   |            |                    |
| INL-38123 |               |          |           | Cool White |                 |                   |            |                    |
| INL-38124 |               |          |           |            |                 |                   |            |                    |
| INL-38125 |               |          |           |            |                 |                   |            |                    |

# FILAMENT

## LED LAMPS




**600**  
 LUMEN
 **DIMMABLE**


**600**  
 LUMEN
 **DIMMABLE**




**400**  
 LUMEN
 **DIMMABLE**


**400**  
 LUMEN
 **DIMMABLE**

| Code      | Bulb Shape    | Cap Type | Power (w) | Colour (k) | Total Flux (lm) | Efficiency (lm/W) | Beam Angle | Dimensions       |
|-----------|---------------|----------|-----------|------------|-----------------|-------------------|------------|------------------|
| INL-36014 | GLS (Classic) | B22      | 6W        | 3000k      | 600             | 100lm/W           | 360°       | Dia:60mm H:108mm |
| INL-36013 | GLS (Classic) | E27      | 6W        | Warm White | 600             |                   |            | Dia:60mm H:108mm |
| INL-36012 | Candle        | E14      | 4W        | Warm White | 400             |                   |            | Dia:35mm H:100mm |
| INL-36017 | GLS (Classic) | B22      | 6W        | 4000k      | 600             |                   |            | Dia:60mm H:108mm |
| INL-36016 | GLS (Classic) | E27      | 6W        | Cool White | 600             |                   |            | Dia:60mm H:108mm |
| INL-36015 | Candle        | E14      | 4W        | White      | 400             |                   |            | Dia:35mm H:100mm |

# G9 LED LAMPS



**NEW**  
FOR  
2023

**500**  
LUMEN

**5W**  
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



**NEW**  
FOR  
2023

**800**  
LUMEN

**8W**  
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



**NEW**  
FOR  
2023

**300**  
LUMEN

**3.5W**  
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures



**NEW**  
FOR  
2023

**550**  
LUMEN

**6.7W**  
LED

- Available as singles, 3 pack or 6 packs
- Warm white 3000k or cool white 4000k colour temperatures

| Warm White 3k | Cool White 4k | Description         | Pack Size | Hours | Lumen | Dimmable     | Dimensions            |
|---------------|---------------|---------------------|-----------|-------|-------|--------------|-----------------------|
| INL-42264     | INL-42265     | 5W G9 LED Clear     | Single    | 500lm | 500lm | Non Dimmable | Dia. 16.5mm<br>H:61mm |
| INL-42266     | INL-42267     |                     | 3 Pack    |       |       |              |                       |
| INL-42268     | INL-42269     |                     | 6 Pack    |       |       |              |                       |
| INL-42270     | INL-42271     | 8W G9 LED Clear     | Single    | 800lm | 800lm | Non Dimmable | Dia. 18mm<br>H:75mm   |
| INL-42272     | INL-42273     |                     | 3 Pack    |       |       |              |                       |
| INL-42274     | INL-42275     |                     | 6 Pack    |       |       |              |                       |
| INL-42276     | INL-42277     | 3.5W G9 LED Frosted | Single    | 300lm | 300lm | Dimmable     | Dia. 17mm<br>H:50mm   |
| INL-42278     | INL-42279     |                     | 3 Pack    |       |       |              |                       |
| INL-42280     | INL-42281     |                     | 6 Pack    |       |       |              |                       |
| INL-42282     | INL-42283     | 6.7W G9 LED Frosted | Single    | 550lm | 550lm | Dimmable     | Dia. 21mm<br>H:69mm   |
| INL-42284     | INL-42285     |                     | 3 Pack    |       |       |              |                       |
| INL-42286     | INL-42287     |                     | 6 Pack    |       |       |              |                       |

# ANTI-GLARE

## DIMMABLE GU10 LED LAMPS



| Code      | Description                 | Colour       | Kelvin | Hours | Lumen | Dimmable | Dimensions         |
|-----------|-----------------------------|--------------|--------|-------|-------|----------|--------------------|
| INL-41999 | 5W Anti-Glare GU10 LED Lamp | Black        | 3000k  | 30000 | 369   | Yes      | Dia:50mm<br>H:56mm |
| INL-42000 |                             |              | 4000k  |       | 367   |          |                    |
| INL-42001 |                             | White        | 3000k  |       | 369   |          |                    |
| INL-42002 |                             |              | 4000k  |       | 367   |          |                    |
| INL-42003 |                             | Chrome       | 3000k  |       | 369   |          |                    |
| INL-42004 |                             |              | 4000k  |       | 367   |          |                    |
| INL-42005 |                             | Satin Chrome | 3000k  |       | 369   |          |                    |
| INL-42006 | 4000k                       |              | 367    |       |       |          |                    |



# G9

## LED LAMPS



| Code      | Description      | Pack Size | Kelvin | Lumen | Dimensions    |
|-----------|------------------|-----------|--------|-------|---------------|
| INL-28573 | 2.5W G9 LED Lamp | Single    | 3000   | 180   | W:16mm H:48mm |
| INL-28575 | 2.5W G9 LED Lamp | 3 Pack    | 3000   | 180   | W:16mm H:48mm |
| INL-28577 | 2.5W G9 LED Lamp | 6 Pack    | 3000   | 180   | W:16mm H:48mm |
| INL-28574 | 2.5W G9 LED Lamp | Single    | 4000   | 180   | W:16mm H:48mm |
| INL-28576 | 2.5W G9 LED Lamp | 3 Pack    | 4000   | 180   | W:16mm H:48mm |
| INL-28578 | 2.5W G9 LED Lamp | 6 Pack    | 4000   | 180   | W:16mm H:48mm |

# GU10

## LED LAMPS



**400**  
LUMEN

**38°**  
BEAM  
ANGLE



**400**  
LUMEN

**38°**  
BEAM  
ANGLE

| Code         | Description          | Hours | Kelvin | Lumen | Dimmable | Dimensions      |
|--------------|----------------------|-------|--------|-------|----------|-----------------|
| INL-34150-3K | 5W LED GU10 LED Lamp | 30000 | 3000   | 400   | -        | Dia:50mm H:53mm |
| INL-34151-3K | 5W LED GU10 LED Lamp | 30000 | 3000   | 400   | Yes      | Dia:50mm H:53mm |
| INL-34150-4K | 5W LED GU10 LED Lamp | 30000 | 4000   | 400   | -        | Dia:50mm H:53mm |
| INL-34151-4K | 5W LED GU10 LED Lamp | 30000 | 4000   | 400   | Yes      | Dia:50mm H:53mm |

# DUSK TILL DAWN

## LED LAMPS



DUSK  
TILL  
DAWN

**800**  
LUMEN



DUSK  
TILL  
DAWN

**800**  
LUMEN

| Code         | Description             | Hours | Kelvin | Lumen | Dimensions       |
|--------------|-------------------------|-------|--------|-------|------------------|
| INL-29464-WW | 9W LED E27 D2D LED Lamp | 40000 | 2700   | 800   | Dia:60mm H:115mm |
| INL-29464-CW | 9W LED E27 D2D LED Lamp | 40000 | 4000   | 800   | Dia:60mm H:115mm |
| INL-29465-WW | 9W LED B22 D2D LED Lamp | 40000 | 2700   | 800   | Dia:60mm H:115mm |
| INL-29465-CW | 9W LED B22 D2D LED Lamp | 40000 | 4000   | 800   | Dia:60mm H:115mm |

# CCT

## LED LAMPS




|   |                      |                              |
|---|----------------------|------------------------------|
|  | <b>1050</b><br>LUMEN | <b>200°</b><br>BEAM<br>ANGLE |
|---|----------------------|------------------------------|



|   |                      |                              |
|---|----------------------|------------------------------|
|  | <b>1050</b><br>LUMEN | <b>200°</b><br>BEAM<br>ANGLE |
|---|----------------------|------------------------------|



|   |                     |                              |
|---|---------------------|------------------------------|
|  | <b>500</b><br>LUMEN | <b>120°</b><br>BEAM<br>ANGLE |
|---|---------------------|------------------------------|

- 3 colour choices
- Not dimmable
- Switch between 3000K warm white, 4000K cool white and 6000K daylight white

| Code          | Description              | Hours | Kelvin | Lumen | Dimensions       |
|---------------|--------------------------|-------|--------|-------|------------------|
| INL-34400-CCT | 6W LED GU10 LED Lamp     | 25000 | CCT    | 500   | Dia:50mm H:53mm  |
| INL-34401-CCT | 12W LED E27 GLS LED Lamp | 25000 | CCT    | 1050  | Dia:60mm H:111mm |
| INL-35728-CCT | 12W LED B22 GLS LED Lamp | 25000 | CCT    | 1050  | Dia:60mm H:111mm |



## WORKSITE


A professional range of robust, high output and long lasting LED site lighting.

|                             |                |
|-----------------------------|----------------|
| <b>SECURITY/FLOODLIGHTS</b> | <b>388-395</b> |
| <b>TORCHES</b>              | <b>396-402</b> |
| <b>PORTABLE</b>             | <b>403-423</b> |
| <b>FESTOON</b>              | <b>424-425</b> |

**NEW**  
FOR  
2023

Upto  
**16500**  
Lumens

**IP65**



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

## SLIMLINE LED Floodlight




| Code       | Description                | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|----------------------------|-----------|-----------------|--------|---------------------------|
| SXLS38687E | Slimline<br>LED Floodlight | 20W LED   | 2200            | 0.32kg | H:120mm W:120mm Proj:33mm |
| SXLS38688E |                            | 30W LED   | 3300            | 0.55kg | H:158mm W:154mm Proj:33mm |
| SXLS38689E |                            | 50W LED   | 5500            | 0.78kg | H:193mm W:183mm Proj:33mm |
| SXLS38690E |                            | 100W LED  | 11000           | 1.24kg | H:233mm W:218mm Proj:33mm |
| SXLS38691E |                            | 150W LED  | 16500           | 1.8kg  | H:268mm W:248mm Proj:33mm |



**NEW**  
FOR  
2023

Upto  
**16500**  
Lumens

**IP65**



- Die-cast aluminium with polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance



## SLIMLINE

### LED Floodlight with PIR Sensor



PIR Sensor



IP65 Rated



180° Beam



6500K DW



0.5M Cable



Class 1

| Code       | Description                             | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|---|-----------|-----------------|--------|---------------------------|
| SXLS38693E | Slimline LED Floodlight with PIR Sensor | 20W LED   | 2200            | 0.35kg | H:190mm W:120mm Proj:54mm |
| SXLS38694E |   | 30W LED   | 3300            | 0.78kg | H:193mm W:183mm Proj:54mm |
| SXLS38695E |   | 50W LED   | 5500            | 1.24kg | H:233mm W:218mm Proj:54mm |
| SXLS38696E |   | 100W LED  | 11000           | 1.8kg  | H:268mm W:248mm Proj:54mm |
| SXLS38697E |   | 150W LED  | 16500           | 1.83kg | H:350mm W:250mm Proj:54mm |

**NEW**  
FOR  
2023

Upto  
**4500**  
Lumens

**IP65**



- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



## FROSTED LED Floodlight



| Code       | Description               | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|---------------------------|-----------|-----------------|--------|---------------------------|
| SXLS38927E | Frosted<br>LED Floodlight | 10W LED   | 900             | 0.32kg | H:80mm W:117mm Proj:55mm  |
| SXLS38928E |                           | 20W LED   | 1800            | 0.4kg  | H:100mm W:150mm Proj:55mm |
| SXLS38929E |                           | 30W LED   | 2700            | 0.55kg | H:120mm W:185mm Proj:55mm |
| SXLS38930E |                           | 50W LED   | 4500            | 0.7kg  | H:145mm W:215mm Proj:55mm |

**NEW**  
FOR  
2023

Upto  
**4500**  
Lumens

**IP54**



**MANUAL  
OVERRIDE**



- Die-cast aluminium with frosted polycarbonate diffuser
- Horizontal & Vertical adjustment on bracket
- Adjustable timer, LUX and sensitivity
- 25,000 hours lifetime

# FROSTED

LED Floodlight with PIR Sensor



| Code       | Description                            | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|--|-----------|-----------------|--------|---------------------------|
| SXLS38933E | Frosted LED Floodlight with PIR Sensor | 10W LED   | 900             | 0.32kg | H:150mm W:117mm Proj:70mm |
| SXLS38934E |  | 20W LED   | 1800            | 0.4kg  | H:155mm W:150mm Proj:75mm |
| SXLS38935E |  | 30W LED   | 2700            | 0.55kg | H:185mm W:185mm Proj:75mm |
| SXLS38936E |  | 50W LED   | 4500            | 0.77kg | H:205mm W:215mm Proj:55mm |

**NEW**  
FOR  
2023

Upto  
**3500**  
Lumens


**IP65**



- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime



## DIECAST LED Floodlight



| Code       | Description                | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|----------------------------|-----------|-----------------|--------|---------------------------|
| SXLS38937E | Die-cast<br>LED Floodlight | 10W LED   | 700             | 0.21kg | H:105mm W:105mm Proj:45mm |
| SXLS38938E |                            | 20W LED   | 1400            | 0.35kg | H:130mm W:130mm Proj:45mm |
| SXLS38939E |                            | 30W LED   | 2100            | 0.51kg | H:165mm W:165mm Proj:45mm |
| SXLS38940E |                            | 50W LED   | 3500            | 0.72kg | H:200mm W:200mm Proj:45mm |



**NEW**  
FOR  
2023

Upto  
**3500**  
Lumens

**IP54**




**MANUAL  
OVERRIDE**

- Die-cast aluminium with frosted polycarbonate diffuser
- Pre wired with 500mm cable
- Adjustable timer, LUX and sensitivity
- Horizontal & Vertical adjustment on bracket
- 25,000 hours lifetime

## DIECAST

### LED Floodlight with PIR Sensor



PIR  
Sensor

IP54  
Rated

0.5M  
Cable

6500K  
DW

Class 1

| Code       | Description                                   | Power (w) | Total Flux (lm) | Weight | Dimensions                |
|------------|---|-----------|-----------------|--------|---------------------------|
| SXLS38941E | Die-cast<br>LED Floodlight<br>with PIR Sensor | 10W LED   | 700             | 0.25kg | H:160mm W:105mm Proj:78mm |
| SXLS38942E |   | 20W LED   | 1400            | 0.42kg | H:185mm W:130mm Proj:78mm |
| SXLS38943E |   | 30W LED   | 2100            | 0.57kg | H:215mm W:165mm Proj:78mm |
| SXLS38944E |   | 50W LED   | 3500            | 0.78kg | H:240mm W:200mm Proj:78mm |

Upto  
**8000**  
Lumens

**IP65**



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation

## SLIMLINE LED Floodlight



| Code          | Description             | Power (w) | Total Flux (lm) | Weight | Dimensions                 |
|---------------|-------------------------|-----------|-----------------|--------|----------------------------|
| SXLS343544KBE | Slimline LED Floodlight | 10W LED   | 800             | 0.18kg | H:120mm W:103mm Proj:65mm  |
| SXLS312944KBE |                         | 20W LED   | 1600            | 0.41kg | H:162mm W:159mm Proj:85mm  |
| SXLS312954KBE |                         | 30W LED   | 2400            | 0.41kg | H:162mm W:159mm Proj:85mm  |
| SXLS312964KBE |                         | 50W LED   | 4000            | 0.74kg | H:180mm W:205mm Proj:115mm |
| SXLS317644KBE |                         | 100W LED  | 8000            | 1.37kg | H:230mm W:270mm Proj:142mm |





Upto  
**4000**  
Lumens







**IP65**



- Die-cast aluminium
- Pre wired with 500mm cable
- 180° beam angle
- Angled bracket for easy installation
- PIR sensor with adjustable LUX sensitivity and timer
- 12m Detection Distance
- Hrs: 20,000

## SLIMLINE

LED Floodlight with PIR

 PIR Sensor | 
  IP65 Rated | 
  180° Beam | 
  6500K DW | 
  0.5M Cable | 
  Class 1

| Code          | Description                      | Power (w) | Total Flux (lm) | Weight | Dimensions                 |
|---------------|----------------------------------|-----------|-----------------|--------|----------------------------|
| SXLS343594KBE |                                  | 10W LED   | 800             | 0.23kg | H:140mm W:103mm Proj:148mm |
| SXLS343604KBE | Slimline LED Floodlight with PIR | 20W LED   | 1600            | 0.46kg | H:180mm W:158mm Proj:159mm |
| SXLS343614KBE |                                  | 30W LED   | 2400            | 0.46kg | H:180mm W:158mm Proj:159mm |
| SXLS343624KBE |                                  | 50W LED   | 4000            | 0.82kg | H:200mm W:205mm Proj:150mm |



**NEW**  
FOR  
2023

**300**  
Lumens

**2**  
Modes  
1 HI | 2 LO

**25m**

**4.5**  
Hours



- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Magnetic design to one side
- Adjustable light angle without removing from your head
- Push button ON/OFF switch with 2 modes (low 100lm/high 300lm)
- Beam projects up to 25m
- Battery lasts up to 10 hours on low, 4.5 hours on high brightness
- Supplied with Duracell batteries



## ALUMINIUM

Magnetic LED Headtorch

| Code       | Description   | Power (w)  | Total Flux (lm) | Weight | Batteries               |
|------------|---------------|------------|-----------------|--------|-------------------------|
| SXLS50100E | LED Headtorch | 3W COB LED | 100/300         | 0.10kg | 3 x 1.5V AAA (included) |



**NEW**  
FOR  
2023

**300**  
Lumens

**3** Modes  
1 HI  
2 LO  
3 FL

**150m**

**1.2/6**  
Hours

- Aluminium construction with adjustable nylon headband for a snug and comfortable fit
- Push button ON/OFF switch with 3 modes (low 100lm/high 300lm/flash)
- Adjustable rotating focus
- Beam projects up to 150m
- Battery lasts up to 6 hours on low, 1.2 hours on high brightness
- Supplied with Duracell batteries



## ALUMINIUM

### Adjustable LED Headtorch

| Code       | Description   | Power (w)   | Total Flux (lm) | Weight  | Batteries               |
|------------|---------------|-------------|-----------------|---------|-------------------------|
| SXLS50101E | LED Headtorch | 3W CREE LED | 90/300          | 0.114kg | 3 x 1.5V AAA (included) |

**NEW**  
FOR  
2023

**600**  
Lumens

**3**  
Modes

**270m**

**2**  
Hours

**IP44**



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 45lm/high 600lm/flash)
- Rotating adjustable focus
- Beam projects up to 270m
- Battery lasts up to 20 hours on low, 2 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



## 600LM ALUMINIUM

Adjustable LED Torch

| Code       | Description     | Power (w) | Total Flux (lm) | Weight  | Batteries               |
|------------|-----------------|-----------|-----------------|---------|-------------------------|
| SXLS50102E | 600lm LED Torch | 5W LED    | 45/600          | 0.155kg | 4 x 1.5V AAA (included) |



**NEW**  
FOR  
2023

**800**  
Lumens

**3**  
Modes

**260m**

**18**  
Hours

**IP44**

- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 50lm/high 800lm/flash)
- Rotating adjustable focus
- Beam projects up to 260m
- Battery lasts up to 50 hours on low, 18 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



## 800LM ALUMINIUM

### Adjustable LED Torch

| Code       | Description     | Power (w) | Total Flux (lm) | Weight  | Batteries             |
|------------|-----------------|-----------|-----------------|---------|-----------------------|
| SXLS50103E | 800lm LED Torch | 7W LED    | 50/800          | 0.305kg | 3 x 1.5V C (included) |



**NEW**  
FOR  
2023

**350**  
Lumens

**3**  
Modes

**175m**

**4**  
Hours

**IP44**



- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25lm/high 350lm/flash)
- Rotating adjustable focus
- Beam projects up to 175m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



## 350LM ALUMINIUM

Adjustable LED Torch

| Code       | Description     | Power (w) | Total Flux (lm) | Weight  | Batteries               |
|------------|-----------------|-----------|-----------------|---------|-------------------------|
| SXLS50105E | 350lm LED Torch | 3W LED    | 25/350          | 0.085kg | 3 x 1.5V AAA (included) |



**NEW**  
FOR  
2023

**280**  
Lumens

**3**  
Modes

**150m**

**4**  
Hours

**IP44**

- Aluminium construction
- Push button ON/OFF switch with 3 modes (low 25m/high 280m/flash)
- Rotating adjustable focus
- Beam projects up to 150m
- Battery lasts up to 25 hours on low, 4 hours on high brightness
- IP44 water resistant
- Supplied with Duracell batteries



## 280LM ALUMINIUM

Adjustable LED Torch

| Code       | Description     | Power (w) | Total Flux (lm) | Weight  | Batteries              |
|------------|-----------------|-----------|-----------------|---------|------------------------|
| SXLS50106E | 280lm LED Torch | 3W LED    | 50/800          | 0.081kg | 2 x 1.5V AA (included) |

**NEW**  
FOR  
2023

**650**  
Lumens

**3**  
Modes

**240m**

**5**  
Hours

**IP44**



- Aluminium construction
- Rechargeable USB-C port with charge indicator  
Red (charging) Green (charged)
- Push button ON/OFF switch with 3 modes  
(low 350lm/high 650lm/flash)
- Rotating adjustable focus
- Beam projects up to 240m
- Battery lasts up to 9 hours on low, 5 hours on  
high brightness
- Charge time 4.5hrs
- IP44 water resistant



## 650LM RECHARGEABLE

Adjustable LED Torch

| Code       | Description            | Power (w)   | Total Flux (lm) | Weight  | Batteries                     |
|------------|------------------------|-------------|-----------------|---------|-------------------------------|
| SXLS50104E | Rechargeable LED Torch | 5W CREE LED | 350/650         | 0.156kg | 1 x 3.7V 2200mAh Rechargeable |



**NEW**  
FOR  
2023

**5200**  
Lumens

**60W**  
*LED*

**IP65**

**PACK**  
INCLUDES  
WORKLIGHT  
& TRIPOD



- NEW improved Twin LED work light with extendable heavy duty tripod
- Tripod has a bar clamp for fast secure fitting and a built in cord wrap
- 2m H05RN-F 3G 1.0mm cable
- 2 x 30W SMD LED for powerful energy efficient light

## TWIN LED

Work Light with Tripod



3M  
Cable



IP65  
Rated



6000K  
DW



Class 1



4.45kg

| Code              | Description                 | Voltage  | Lamp        | Lumen | Dimensions               |
|-------------------|-----------------------------|----------|-------------|-------|--------------------------|
| SXLS34624/31333LE | Twin Work Light with Tripod | 220-240V | 2 x 30W LED | 5200  | Dia:1160mm H:1170/1700mm |


**NEW**  
FOR  
2023

Upto  
**1500**  
Lumens

**IP54**



- Rechargeable SAMSUNG battery cells
- Durable ABS with heavy duty rubber surround
- 25% / 50% / 100% / OFF brightness modes
- 1m H05RN-F 3G 1.0mm charging cable with IEC connector
- 2 hours run time at full brightness, 50% brightness, 5 hours & 25% brightness, 8 hours
- 4-5 hours charge time
- 25,000 hours LED lifetime



## RECHARGEABLE

### Work Light



| Code       | Description             | Voltage  | Battery      | Lamp    | Lumen | Dimensions             |
|------------|-------------------------|----------|--------------|---------|-------|------------------------|
| SXLS31329E | Rechargeable Work Light | 220-240V | 3.7V 4400mAh | 10W LED | 1000  | L:58mm W:158mm H:225mm |
| SXLS31330E | Rechargeable Work Light | 220-240V | 3.7V 8800mAh | 20W LED | 1500  | L:58mm W:158mm H:225mm |



**NEW**  
FOR  
2023

**4000**  
Lumens

**50W**  
*LED*






**IP54**

- Durable ABS / PC body with steel legs
- Foldable stand and carry handle
- 2m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 50W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80



# PLASTERERS

## Area Work Light

|  |  |  |  |   |
|--|--|--|--|---|
| <br>2M<br>Cable | <br>IP54<br>Rated | <br>6000K<br>DW | <br>Class 1 | <br>2.65kg |
|--|--|--|--|---|

| Code       | Description           | Voltage | Lamp    | Lumen | Dimensions               |
|------------|-----------------------|---------|---------|-------|--------------------------|
| SXLS37673E | Plasterers Work Light | 240V    | 50W LED | 4000  | L:880mm W:880mm H:1070mm |







**8400**  
Lumens


**80W**  
*LED*

**IP54**

- 180° and 360° directional light heads helps prevent light wastage or pollution
- Telescopic pole with manual quick release handles for speedy height adjustment
- Adjustable height from 1.5 to 2m
- Integrated carry handle
- Each head can be switched ON/OFF independently
- 3m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet



## 360° AREA Tower Light

|  |  |  |  |  |
|--|--|--|--|--|
| <br>3M<br>Cable | <br>IP54<br>Rated | <br>6500K<br>DW | <br>Class 1 | <br>5.6kg |
|--|--|--|--|--|

| Code       | Description           | Power (w) | Colour (k) | Total Flux (lm) | Dimensions              |
|------------|-----------------------|-----------|------------|-----------------|-------------------------|
| SXLS37182E | 360° Area Tower Light | 80W       | 6500       | 8600            | H:1500-2000mm Dia:920mm |



**4800**  
Lumens

**IP65**

**60W**  
**LED**



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

## TWIN

2 x 30W Worklight



2M  
Cable



IP65  
Rated



4000K  
CW



Class 1



1.7kg

| Code       | Description            | Power (w) | Colour (k) | Total Flux (lm) | Dimensions              |
|------------|------------------------|-----------|------------|-----------------|-------------------------|
| SXLS37952E | Twin 2 x 30W Worklight | 60W       | 4000       | 4800            | L:175mm W:485mm H:315mm |



**3000**  
Lumens

**40W**  
*LED*

**IP65**

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 2m H05RN-F 3G 1.5mm cable
- IP65 rated
- Tripod mountable

## TWIN

2 x 20W Worklight



2M  
Cable



IP65  
Rated



4000K  
CW



Class 1



2kg

| Code       | Description            | Power (w) | Colour (k) | Total Flux (lm) | Dimensions              |
|------------|------------------------|-----------|------------|-----------------|-------------------------|
| SXLS37951E | Twin 2 x 20W Worklight | 40W       | 4000       | 3000            | L:175mm W:485mm H:315mm |



Upto  
**4000**  
Lumens

**IP44**


**3**  
SIZES  
AVAILABLE



- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Light can be angled exactly where needed
- 1.5m H05RN-F 3G 1.0mm cable

## PORTABLE

### Work Light



| Code       | Description        | Power (w) | Colour (k) | Total Flux (lm) | Weight (kg) | Dimensions                  |
|------------|--------------------|-----------|------------|-----------------|-------------|-----------------------------|
| SXLS36383E | Folding Work Light | 20W       | 4000       | 1600            | 1kg         | L:115mm x W:190mm x H:290mm |
| SXLS35584E |                    | 30W       | 4000       | 2400            | 1.25        | L:145mm W:220mm H:320mm     |
| SXLS35585E |                    | 50W       | 4000       | 4000            | 1.45        | L:185mm W:250mm H:330mm     |







Upto  
**3600**  
Lumens

**IP65**

**3**  
SIZES  
AVAILABLE

- Durable steel frame and die-cast aluminium body
- Frosted shatterproof lens
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm cable

## FOLDING Work Light

 1.5M Cable | 
  IP65 Rated | 
  4000K CW | 
  Class 1

| Code       | Description        | Power (w) | Colour (k) | Total Flux (lm) | Weight (kg) | Dimensions                  |
|------------|--------------------|-----------|------------|-----------------|-------------|-----------------------------|
| SXLS35525E | Folding Work Light | 20W       | 4000       | 1500            | 0.93        | L:165mm x W:225mm x H:275mm |
| SXLS35526E |                    | 30W       | 4000       | 2200            | 1.28        | L:185mm W:250mm H:335mm     |
| SXLS35527E |                    | 50W       | 4000       | 3600            | 1.7         | L:185mm W:280mm H:375mm     |

8400  
Lumens

120W  
LED

IP65

IK10



- Tripod mountable
- Durable polycarbonate body
- Heavy duty shockproof base
- 360° beam angle for shadow free illumination
- 5m H05RN-F 3G 1.5mm cable
- IK10 vandal resistant
- 120W LED module (SMD)
- K: 6000
- Lm/W: 70

## AREA Work Light



| Code        | Description     | Voltage | Lamp     | Lumen | Dimensions              |
|-------------|-----------------|---------|----------|-------|-------------------------|
| SXLS31324ES | Area Work Light | 110V    | 120W LED | 8400  | L:349mm W:347mm H:436mm |



**7500  
Lumens**

**50W  
LED**

**IP65**



- EVE Energy rechargeable battery cells
- Durable steel frame and die-cast aluminium body
- Battery: 6 x 3.7V 2600mAh
- 20% / 60% / 100% / OFF brightness modes
- Run time
  - 100% - 4 hours
  - 60% 9 hours
  - 20% 12 hours
- 5-6 hours charge time
- 25,000 hours LED lifetime

## RECHARGEABLE

### Folding Worklight

 Rechargeable | 
  IP65 Rated | 
  6000K DW | 
  Class 3 | 
  1.65kg

| Code       | Description            | Power (w) | Colour (k) | Total Flux (lm) | Dimensions              |
|------------|------------------------|-----------|------------|-----------------|-------------------------|
| SXLS37177E | Rechargeable Worklight | 20W       | 6000       | 3000            | L:185mm W:229mm H:285mm |
| SXLS37178E | Rechargeable Worklight | 30W       | 6000       | 4500            | L:195mm W:260mm H:320mm |
| SXLS37179E | Rechargeable Worklight | 50W       | 6000       | 7500            | L:220mm W:300mm H:385mm |



**NEW**

**2600  
Lumens**

**30W  
LED**

**IP54**



- 3m H07RN-F 3G 1.5mm cable
- 1 x external socket outlet
- Magnetic base
- Hanging hook
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



## MAGNETIC & LINKABLE

### Globe Area Light



3M  
Cable



IP54  
Rated



6000K  
DW



1.93kg

| Code       | Description      | Voltage  | Lamp    | Lumen | Dimensions              |
|------------|------------------|----------|---------|-------|-------------------------|
| SXLS36986E | Globe Area Light | 220-240V | 30W LED | 2600  | H:260mm W:200mm D:210mm |



**2100**  
Lumens


**35W**  
*LED*

**IP44**

- Durable ABS / PC body
- Heavy duty rubber surround
- Folding carry handle acts as a stand and wall mountable fixture
- 5m H05RN-F 3G 1.5mm cable
- 1 x external socket outlet
- 35W LED module (SMD)
- K: 6000
- Lm: 2100
- Lm/W: 70



## PORTABLE Work Light

 5M Cable | 
  IP44 Rated | 
  6000K DW | 
  Class 2 | 
  2.24kg

| Code       | Description         | Voltage  | Lamp    | Lumen | Dimensions              |
|------------|---------------------|----------|---------|-------|-------------------------|
| SXLS31326E | Portable Work Light | 220-240V | 35W LED | 2100  | L:120mm W:270mm H:275mm |

**4000**  
Lumens

**50W**  
*LED*

**IK10**



- Durable ABS / PC body
- Heavy duty shockproof base with moulded carry handle
- IK10 impact resistant for tough working environments
- 2 x external socket outlets
- 5m H05RN-F 3G 1.5mm cable
- 50W LED module (SMD)
- Lm/W: 80



## PANEL Work Light



5M  
Cable



IK10



IP44  
Rated



6000K  
DW



Class 1



2.96kg

| Code        | Description      | Voltage | Lamp    | Lumen | Dimensions              |
|-------------|------------------|---------|---------|-------|-------------------------|
| SXLS31325ES | Panel Work Light | 110V    | 50W LED | 4000  | L:150mm W:300mm H:465mm |





**4000  
Lumens**

**33W  
LED**

**IP65**



- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 33W LED module (SMD)
- K: 6000
- Lm: 4000
- Lm/W: 80
- Hrs: 20,000

## WORK LIGHT



| Code       | Description | Voltage  | Lamp    | Lumen | Dimensions              |
|------------|-------------|----------|---------|-------|-------------------------|
| SXLS31331E | Work Light  | 220-240V | 33W LED | 4000  | L:183mm W:215mm H:330mm |





**8000**  
Lumens

**66W**  
*LED*

**IP65**



- Durable die-cast aluminium and steel
- Floorstanding or can be tripod mounted
- 50% / 100% / OFF brightness modes
- 2m H05RN-F 3G 1.5mm cable
- 2 x 33W LED module (SMD)
- K: 6000
- Lm: 8000
- Lm/W: 80
- Hrs: 20,000

# WORK LIGHT

 2M Cable | 
  IP65 Rated | 
  6000K DW | 
  Class 2 | 
  4.45kg

| Code       | Description     | Voltage  | Lamp        | Lumen | Dimensions              |
|------------|-----------------|----------|-------------|-------|-------------------------|
| SXLS31332E | Twin Work Light | 220-240V | 2 x 33W LED | 8000  | L:183mm W:540mm H:370mm |



**Upto  
3900  
Lumens**

**IP65**

- Durable die-cast body with plastic protective bumpers
- Foldable stand for easy storage and transportation
- 1.8m H05RN-F 3G 1.0mm cable

## FOLDING Work Light



| Code       | Description        | Voltage  | Lamp    | Lumen | Weight | Dimensions              |
|------------|--------------------|----------|---------|-------|--------|-------------------------|
| SXLS31334E | Folding Work Light | 220-240V | 10W LED | 800   | 1.6kg  | L:235mm W:276mm H:283mm |
| SXLS31335E | Folding Work Light | 220-240V | 20W LED | 1500  | 1.7kg  | L:245mm W:292mm H:295mm |
| SXLS31336E | Folding Work Light | 220-240V | 30W LED | 2100  | 1.84kg | L:255mm W:332mm H:295mm |
| SXLS31337E | Folding Work Light | 220-240V | 50W LED | 3900  | 1.92kg | L:255mm W:322mm H:295mm |




**Upto  
1800  
Lumens**

**IP65**



- Durable die-cast body with plastic protective bumpers
- 30% / 50% / 100% / OFF brightness modes
- Foldable stand for easy storage and transportation
- 1.5m H05RN-F 3G 1.0mm charging cable
- USB charging port with Android & IOS compatibility

## RECHARGEABLE Folding Work Light



| Code       | Description                     | Battery     | Charge-Time | Run-Time (100%) | Lamp    | Lumen | Weight | Dimensions              |
|------------|---------------------------------|-------------|-------------|-----------------|---------|-------|--------|-------------------------|
| SXLS31338E | Rechargeable Folding Work Light | 2 x 2200mAh | 3 Hours     | 3 Hours         | 8W LED  | 600   | 1.6kg  | L:235mm W:276mm H:283mm |
| SXLS31339E |                                 | 4 x 2200mAh | 4.5 Hours   | 3 Hours         | 18W LED | 1350  | 1.7kg  | L:245mm W:292mm H:295mm |
| SXLS31340E |                                 | 6 x 2200mAh | 4.5 Hours   | 3 Hours         | 24W LED | 1800  | 1.8kg  | L:255mm W:332mm H:295mm |

NEW

4500  
Lumens

50W  
LED

IP54



- 3 Lighting Heads (Side lights adjustable)
- 1.5M H05RN-F 3G 1.5mm cable
- 3 Switch modes 4500LM / 2250LM / OFF
- Quick release mechanism
- Suitable for tripod mounting with Stanley Universal Tripod
- IP54 Rated



## Multi Directional Work Light



1.5M  
Cable



IP54  
Rated



6000K  
DW



2.15kg

| Code       | Description                  | Power (w) | Colour (k) | Total Flux (lm) | Dimensions                              |
|------------|------------------------------|-----------|------------|-----------------|---|
| SXLS37180E | Multi Directional Work Light | 50W       | 6000       | 2600            | H:235mm (w/o handle)<br>W:405mm D:185mm |





**800**  
Lumens

**10W**  
LED

**IP44**



- Durable ABS / PC body
- 10 x E27 lampholders with protective guards
- 22m H05RN-F 3G 1.5mm cable
- 2m lampholder spacing
- 10 x 10W LED lamps included

## FESTOON

### 10 Light

22M  
Cable

IP44  
Rated

6500K  
DW

Class 1

7.76kg

| Code       | Description      | Voltage  | Lamp                     | Lumen | Dimensions (Each Head) |
|------------|------------------|----------|--------------------------|-------|------------------------|
| SXLS31361E | 10 Light Festoon | 220-240V | 10 x 10W Max LED E27 GLS | 800   | H:182mm Dia:115mm      |



**6400**  
Lumens

**80W**  
*LED*

**IP44**



- Durable ABS / PC construction
- 10 x 8W LED lamps
- 22m H05RN-F 3G 1.5mm cable
- 10 x 8W LED module (SMD)
- Lm: 6400
- Lm/W: 80

## LED FESTOON

### 10 Light

|   |  |  |  |   |
|---|--|--|--|---|
| <br>22M<br>Cable | <br>IP44<br>Rated | <br>6500K<br>DW | <br>Class 1 | <br>7.76kg |
|---|--|--|--|---|

| Code        | Description          | Voltage | Lamp        | Lumen    | Dimensions (Each Head) |
|-------------|----------------------|---------|-------------|----------|------------------------|
| SXLS31362ES | 10 Light LED Festoon | 110V    | 10 x 8W LED | 10 x 640 | H:67mm Dia:115mm       |
| SXLS31362E  | 10 Light LED Festoon | 240V    | 10 x 8W LED | 10 x 640 | H:67mm Dia:115mm       |



# MARKETING.

At Forum we offer a variety of Point of Sale and Marketing material, from counter top to wall board and ceiling displays.

Please speak to your internal or local sales person for more details.





# INFORMATION

## LIGHTING TERMS

---

### Bathroom Zone

Suitability for a product to be installed near or in water.

### CCT

Colour Changing Technology.

### Colour Switchable

Colour temperature can be switched between 3000K to 4000K or 6000K.

### Cool White (CW) 4000K

Light with a CCT kelvin temperature of 4000K.

### Daylight White (DW) 6000K

Light with a CCT kelvin temperature of 6000K.

### Downlight

A luminaire designed to be installed in a ceiling, with the light source pointed vertically downwards.

### Floodlight

A luminaire featuring a wide beam angle, designed to provide illumination over a wide area.

### IK Rating

Indicates the protection against mechanical impact. Rated from IK00 to IK10.

### IP Rating

Ingress Protection Rating.

### Kelvin (K)

Kelvin is the scientific unit for measuring CCT.

### LED (Light Emitting Diode)

Emits light through the conversion of electrical energy.

### Lifetime

The definition of LED luminaire lifetime is the period in hours after which the luminaire no longer delivers the correct amount of light,

either insufficient light is produced or none at all. This may be a combination of many factors not limited to just the LED performance.

### Lumens (lm)

The quantity of light emitted from a light source that is visible. The higher the lumens, the brighter the light.

### LUX

A measure of the intensity of light, defined as 1lm /m<sup>2</sup>.

### Microwave Sensor

An active intrusion sensor that detects the movement of a person or object through a pattern of microwave energy

### Photocell

Sometimes known as a dusk to dawn sensor. The sensor reacts to the ambient light and will turn the fitting on when a pre-set light level is reached

### PIR Sensor

Passive Infrared Device, used to activate lighting when a person enters a room or area.

### Power Supply / Driver

Power source for the LED luminaire.

### RGB

Red, Green, Blue. Used to describe colour changing products that can be used to dynamically add colour to any environment.

### RGBW

Stands for Red, Green, Blue, White. Used to describe colour changing products that can be used to dynamically add colour to any environment. Can also be run on white when natural lighting is required.

### Spotlight

A light source featuring a narrow beam angle, designed to allow highlighting or illumination of specific features in an area.

### Task Lighting

Lighting specifically designed to provide functional illumination of an environment.

### Warm White (WW) 3000K

Light with a CCT kelvin temperature of 3000K.

### Watt (W)

The unit of electrical power stating the amount of electricity consumed by the product.

### Work Lighting

Lighting specifically designed to provide functional illumination of a work site environment.

# COLOUR TEMPERATURE

## GUIDE

LEDs make it possible to have a choice of white colours or 'tones'. This allows easy customisation of an area to bring out the best in the materials and design of a room. With standard white LED lighting, these tones range from warm-yellow, to daylight-blue light, with options in between. The graphic below is a reference that starts at a warm yellow colour on the left and fades into a blue colour on the right.

Colour temperature ratings describe the tones of white light available. Colour temperature options range from 2000-3000K for Warm White lighting, 3100-4500 for Cool White lighting and 4600-6500 for Daylight White lighting. It can be a tricky decision to know what is best for your installation, but our skilled technical sales team are on hand to guide you through choosing the perfect white tone for your room.



|                    |  |   |   |
|--------------------|--|---|---|
| Colour temperature | 2000-3000K   | 3100-4500K  | 4600-6500K  |
| Light appearance   | Warm White   | Cool White  | Daylight White  |
| Best for           | Warmer whites are generally preferred for creating a more relaxed environment in dining, living or reception areas | Cool white is a good choice for retail and office environments where a simulated natural, outdoor light is preferred. Use in contemporary kitchens and bathroom to complement décor | Perfect for industrial, security, garages and task lighting where the most natural lighting is required |

# IP RATING

## INGRESS PROTECTION

Ingress protection rating (IP); this relates to the degree of protection the light provides against solid objects and water ingress. IP ratings are relevant to anywhere that moisture is prevalent, such as bathrooms, utility rooms and outdoor environments. Written as IPXX, the first X denotes the level of protection offered from dust; the second X denotes the level of protection offered from moisture. The higher the numbers are, the better the protection will be.

### SOLID OBJECTS

|   |  |
|---|--|
| 0 | No special protection  |
| 1 | Protection from a large part of the body such as a hand (but no protection from deliberate access); from solid objects greater than 50mm in diameter |
| 2 | Protection against fingers or other objects not greater than 80mm in length and 12mm in diameter   |
| 3 | Protection from entry by tools, wires etc, with a diameter of 2.5mm or more  |
| 4 | Protection against solid bodies larger than 1mm  |
| 5 | Protection against dust that may harm equipment  |
| 6 | Totally dust-tight; no ingress of dust   |

### LIQUIDS

|   |   |
|---|---|
| 0 | No special protection   |
| 1 | Protected against dripping water; vertically falling drops  |
| 2 | Protected against vertical falling drops of water with enclosure tilted up to 15 degrees from the vertical; limited ingress permitted |
| 3 | Protected against sprays of water up to 60 degrees from the vertical; limited ingress permitted                                       |
| 4 | Protection from splashing water from any direction  |
| 5 | Protection against low pressure water jets (all directions)   |
| 6 | Protection against high pressure water jets and waves   |
| 7 | Protection against temporary immersion  |
| 8 | Watertight against the effects of immersion in water under pressure for long periods  |

Ingress protection ----- **IP65**

# BATHROOM ZONING

## WHAT IS BATHROOM ZONING?


All bathroom lighting installations must comply to the guidelines set out in Amendment 1 of the 17th edition of the IEE Wiring Regulations (BS7671). The bathroom is divided into zones, with prescribed minimum IP ratings for the light fittings in each zone. To illustrate IP zoning regulations, the bathroom area is divided up into areas or 'ZONES'. Light fittings are then assigned an 'IP rating' which indicates how much protection they provide against ingress of water and other particles. Each zone has a minimum IP requirement that must be met if a fitting is to be installed in this area.

### Zone 0 $\geq$ IPX7

Inside bath or shower. Only 12V AC rms or 30V ripple-free DC SELV fittings with a minimum rating of IPX7 (protected against immersion in water). Transformers must be sited outside Zones 0,1,2.

### Zone 1 $\geq$ IPX5

The area above the bath or shower up to a height of 2.25 metres. Fittings must be rated at IPX5 or higher (protected from jets of water).

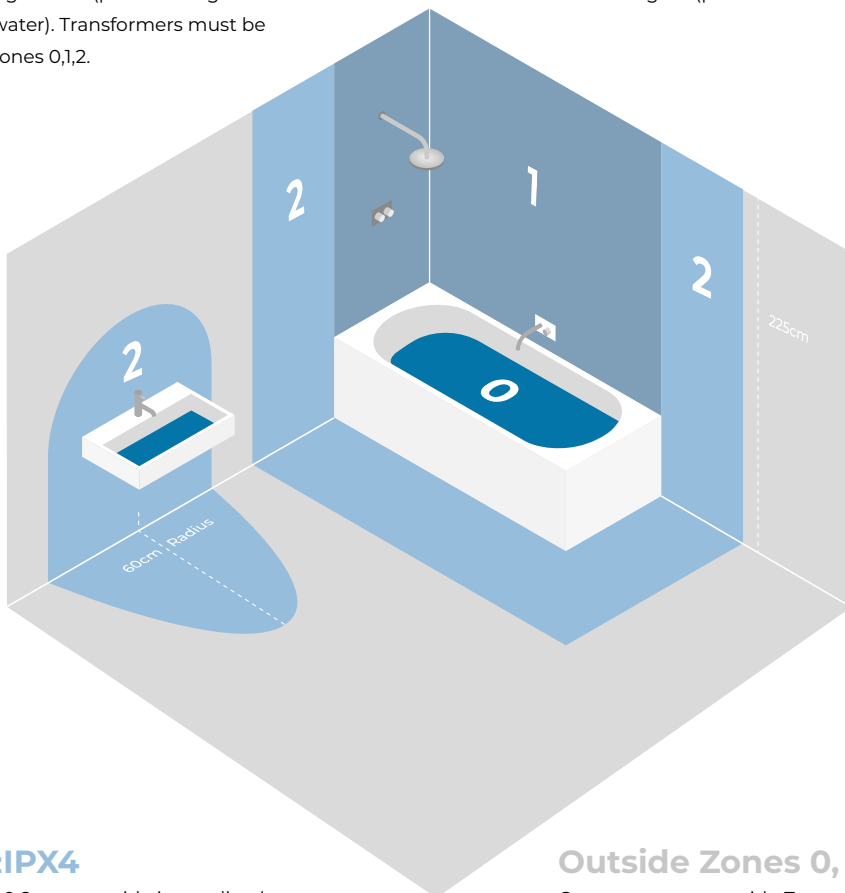

### Zone 2 $\geq$ IPX4

Covers an area 0.6 metres wide immediately next to, and all around Zone 1. The 60cm area around washbasins should also be treated as zone 2. The minimum rating is IPX4. If there is a likelihood of water jets being used for cleaning purposes in Zone 2, a minimum of IPX5 is required.

### Outside Zones 0, 1 & 2

Covers any area outside Zones 0, 1 and 2. There is no IP requirement in this zone. Bathrooms are allowed to contain a socket outlet, this must be located 3 metres outside Zone 1. Lighting circuits and any socket-outlet circuit in a room containing a bath and/or shower must be provided with 30mA RCD protection.

# INDEX.

Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without any liability on the part of the Company. Goods supplied may vary in detail from the illustrations, drawings, measurements and descriptions set out in the Company's sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is, subject to these Conditions, that as understood by general usage in the trade. For full terms and conditions of sale consult your distributor.



# INDEX (ALPHABETICAL)

|               |        |               |         |               |     |
|---------------|--------|---------------|---------|---------------|-----|
| CUL-21624     | 311    | CUL-30698     | 201/338 | CUL-37788     | 324 |
| CUL-21625     | 311    | CUL-30699     | 201/338 | CUL-37789     | 324 |
| CUL-21626     | 310    | CUL-30700     | 201/338 | CUL-37790     | 324 |
| CUL-21627     | 311    | CUL-30701     | 201/338 | CUL-37791     | 326 |
| CUL-21637     | 334    | CUL-30702     | 201/338 | CUL-37792     | 326 |
| CUL-21638     | 334    | CUL-30703     | 201/338 | CUL-37793     | 327 |
| CUL-21639     | 334    | CUL-30704     | 201/338 | CUL-37794     | 327 |
| CUL-21643     | 336    | CUL-30705     | 201/338 | CUL-37795     | 323 |
| CUL-21645     | 336    | CUL-30706     | 201/338 | CUL-37796     | 323 |
| CUL-21647     | 336    | CUL-30707     | 201/338 | CUL-37797     | 322 |
| CUL-21649     | 336    | CUL-30708     | 201/338 | CUL-37798     | 322 |
| CUL-21651     | 336    | CUL-30709     | 201/338 | CUL-37800     | 331 |
| CUL-21653     | 336    | CUL-30710     | 339/203 | CUL-40031     | 320 |
| CUL-21656     | 335    | CUL-30711     | 339/203 | CUL-40032     | 320 |
| CUL-21658     | 335    | CUL-33996-BLK | 336     | CUL-40033     | 320 |
| CUL-21660     | 334    | CUL-33996-WHT | 336     | CUL-40034     | 320 |
| CUL-21661     | 315    | CUL-34223-CCT | 316     | CUL-40035     | 320 |
| CUL-21662     | 315    | CUL-34224-CCT | 316     | CUL-40036     | 320 |
| CUL-21663     | 315    | CUL-34225-CCT | 316     | CUL-40037     | 321 |
| CUL-21664     | 315    | CUL-34226-CCT | 316     | CUL-40038     | 321 |
| CUL-21665     | 314    | CUL-35860     | 313     | CUL-40039     | 321 |
| CUL-21666     | 314    | CUL-35861     | 313     | CUL-40040     | 321 |
| CUL-25218     | 311    | CUL-35864     | 312     | CZ-20947-BLK  | 161 |
| CUL-25219     | 310    | CUL-35865     | 313     | CZ-25142-BLK  | 161 |
| CUL-25220     | 311    | CUL-37386     | 317     | CZ-25143-BLK  | 171 |
| CUL-25317     | 311    | CUL-37387     | 317     | CZ-25144-BLK  | 170 |
| CUL-25318     | 311    | CUL-37388     | 317     | CZ-25145-BLK  | 154 |
| CUL-25319     | 310    | CUL-37389     | 317     | CZ-25148-BLK  | 152 |
| CUL-25320     | 311    | CUL-37768     | 328     | CZ-25149-BLK  | 153 |
| CUL-25321     | 315    | CUL-37769     | 328     | CZ-25150-BLK  | 154 |
| CUL-25322     | 315    | CUL-37770     | 328     | CZ-26743-BLK  | 155 |
| CUL-25323     | 315    | CUL-37771     | 328     | CZ-29191-ATR  | 176 |
| CUL-26332     | 334    | CUL-37772     | 329     | CZ-29192-ATR  | 175 |
| CUL-26333     | 334    | CUL-37773     | 329     | CZ-29193-ATR  | 175 |
| CUL-26334     | 334    | CUL-37774     | 329     | CZ-29319-ANTH | 173 |
| CUL-26335     | 334    | CUL-37775     | 330     | CZ-29319-BLK  | 173 |
| CUL-26336     | 336    | CUL-37776     | 330     | CZ-29319-SST  | 173 |
| CUL-26337     | 336    | CUL-37777     | 330     | CZ-29320-ANTH | 171 |
| CUL-26338     | 336    | CUL-37778     | 330     | CZ-29320-BLK  | 171 |
| CUL-26339     | 336    | CUL-37779     | 330     | CZ-29320-SST  | 171 |
| CUL-26340     | 336    | CUL-37780     | 330     | CZ-29321-ANTH | 173 |
| CUL-26341     | 336    | CUL-37781     | 330     | CZ-29321-BLK  | 173 |
| CUL-26342     | 336    | CUL-37782     | 330     | CZ-29321-SST  | 173 |
| CUL-26344     | 335    | CUL-37783     | 329     | CZ-31740-BLK  | 168 |
| CUL-26345     | 335    | CUL-37784     | 329     | CZ-31743-BLK  | 167 |
| CUL-26346     | 334    | CUL-37785     | 329     | CZ-31744-BLK  | 170 |
| CUL-26465     | 337/75 | CUL-37786     | 328     | CZ-31745-BLK  | 167 |
| CUL-26465-VVW | 337/75 | CUL-37787     | 324     | CZ-31746-BLK  | 168 |

# INDEX (ALPHABETICAL)

|                  |         |                  |         |                |     |
|------------------|---------|------------------|---------|----------------|-----|
| CZ-31747-BLK     | 177     | ELA-27467-SATBRS | 213/269 | ELA-41712      | 200 |
| CZ-31748-BLK     | 155     | ELA-27467-SCHR   | 213/269 | ELA-41713      | 200 |
| CZ-31749-BLK     | 177     | ELA-27467-WHT    | 213/269 | ELA-41714      | 200 |
| CZ-31750-BLK     | 166     | ELA-34280        | 185     | ELA-41715      | 200 |
| CZ-31751-BLK     | 167     | ELA-34281        | 185     | ELA-41718      | 199 |
| CZ-31752-BLK     | 177     | ELA-34282        | 185     | ELA-41719      | 199 |
| CZ-31806-BLK     | 179     | ELA-34283        | 187     | ELA-41720      | 199 |
| CZ-31811-BLK     | 158     | ELA-34284        | 187     | ELA-41721      | 199 |
| CZ-31812-BLK     | 158     | ELA-34285        | 187     | ELA-41722      | 199 |
| CZ-33397-BLK     | 163     | ELA-34286        | 196     | ELA-41723      | 199 |
| CZ-33461-BLK     | 159     | ELA-34287        | 196     | ELA-41724      | 199 |
| CZ-34014-BLK     | 165     | ELA-34290        | 188     | ELA-41725      | 199 |
| CZ-34015-BLK     | 165     | ELA-34291        | 189     | ELA-41726      | 199 |
| CZ-34016-BLK     | 166     | ELA-34292        | 196     | ELA-41727      | 199 |
| CZ-34017-BLK     | 166     | ELA-34293        | 196     | ELA-41728      | 199 |
| CZ-34023-BLK     | 163     | ELA-34296        | 191     | ELA-41729      | 199 |
| CZ-34025-BLK     | 160     | ELA-34297        | 196     | INL-23519-BLK  | 363 |
| CZ-34026-BLK     | 160     | ELA-34300        | 195     | INL-23519-CRY  | 363 |
| CZ-34027-BLK     | 160     | ELA-34301        | 195     | INL-23519-HERR | 363 |
| CZ-35704-BLK     | 169     | ELA-34302        | 195     | INL-23519-RED  | 363 |
| CZ-35705-BLK     | 169     | ELA-34303        | 195     | INL-27988-ABRS | 365 |
| CZ-35742-BLK     | 155     | ELA-34304        | 195     | INL-27988-ACOP | 365 |
| CZ-38639-ANTH    | 157     | ELA-34305        | 195     | INL-27988-BRZ  | 365 |
| CZ-38639-BLK     | 157     | ELA-34306        | 194     | INL-27988-PEW  | 365 |
| CZ-41087-BLK     | 180     | ELA-34307        | 194     | INL-27988-SNIC | 365 |
| CZ-41088-BLK     | 180     | ELA-34308        | 194     | INL-28201-BCHR | 349 |
| CZ-41089-BLK     | 180     | ELA-34857        | 185     | INL-28202-BCHR | 349 |
| CZ-41090-BLK     | 180     | ELA-34858        | 185     | INL-28203-BCHR | 349 |
| CZ-41091-BLK     | 181     | ELA-34859        | 185     | INL-28205-BCHR | 350 |
| CZ-41092-BLK     | 181     | ELA-34860        | 187     | INL-28573      | 382 |
| CZ-41093-BLK     | 181     | ELA-34861        | 187     | INL-28574      | 382 |
| ELA-21665        | 200     | ELA-34862        | 187     | INL-28575      | 382 |
| ELA-21666        | 200     | ELA-34871        | 188     | INL-28576      | 382 |
| ELA-27465-BCHR   | 212/271 | ELA-34872        | 189     | INL-28577      | 382 |
| ELA-27465-CHR    | 212/271 | ELA-34873        | 191     | INL-28578      | 382 |
| ELA-27465-MBLK   | 212/271 | ELA-35743        | 205     | INL-29464-CW   | 384 |
| ELA-27465-SATBRS | 212/271 | ELA-35744        | 205     | INL-29464-WW   | 384 |
| ELA-27465-SCHR   | 212/271 | ELA-35745        | 205     | INL-29465-CW   | 384 |
| ELA-27465-WHT    | 212/271 | ELA-35746        | 205     | INL-29465-WW   | 384 |
| ELA-27466-BCHR   | 211/270 | ELA-35750        | 193     | INL-31723-BLK  | 353 |
| ELA-27466-CHR    | 211/270 | ELA-35751        | 193     | INL-31723-SBRS | 353 |
| ELA-27466-MBLK   | 211/270 | ELA-35752        | 193     | INL-31723-SNIC | 353 |
| ELA-27466-SATBRS | 211/270 | ELA-35753        | 193     | INL-31723-WHT  | 353 |
| ELA-27466-SCHR   | 211/270 | ELA-36974        | 195     | INL-31775-BLK  | 352 |
| ELA-27466-WHT    | 211/270 | ELA-36975        | 195     | INL-31775-SBRS | 352 |
| ELA-27467-BCHR   | 213/269 | ELA-37801        | 329     | INL-31775-SNIC | 352 |
| ELA-27467-CHR    | 213/269 | ELA-37802        | 329     | INL-31775-WHT  | 352 |
| ELA-27467-MBLK   | 213/269 | ELA-37803        | 329     | INL-31776-BLK  | 352 |

# INDEX (ALPHABETICAL)

|                |     |                |     |                      |     |
|----------------|-----|----------------|-----|----------------------|-----|
| INL-31776-SBRS | 352 | INL-37222      | 345 | INL-42264            | 380 |
| INL-31776-SNIC | 352 | INL-37223      | 345 | INL-42265            | 380 |
| INL-31776-WHT  | 352 | INL-37224      | 344 | INL-42266            | 380 |
| INL-31789-ACOP | 369 | INL-37225      | 343 | INL-42267            | 380 |
| INL-31790-BCR  | 350 | INL-37226      | 343 | INL-42268            | 380 |
| INL-33818-ABRS | 371 | INL-37829      | 367 | INL-42269            | 380 |
| INL-33818-ACOP | 371 | INL-37839      | 366 | INL-42270            | 380 |
| INL-33818-MBLK | 371 | INL-37877      | 369 | INL-42271            | 380 |
| INL-33818-MGRY | 371 | INL-37878      | 369 | INL-42272            | 380 |
| INL-33818-PNIC | 371 | INL-37894-BCOP | 362 | INL-42273            | 380 |
| INL-33819-ACOP | 371 | INL-37894-BRZ  | 362 | INL-42274            | 380 |
| INL-33819-MGRY | 371 | INL-37894-PEW  | 362 | INL-42275            | 380 |
| INL-33819-PNIC | 371 | INL-38119      | 378 | INL-42276            | 380 |
| INL-34028-AMB  | 375 | INL-38120      | 378 | INL-42277            | 380 |
| INL-34028-SMK  | 375 | INL-38122      | 378 | INL-42278            | 380 |
| INL-34029-AMB  | 375 | INL-38123      | 378 | INL-42279            | 380 |
| INL-34029-SMK  | 375 | INL-38124      | 378 | INL-42280            | 380 |
| INL-34030-AMB  | 375 | INL-38125      | 378 | INL-42281            | 380 |
| INL-34030-SMK  | 375 | INL-38239-BRZ  | 373 | INL-42282            | 380 |
| INL-34031-AMB  | 375 | INL-38239-PEW  | 373 | INL-42283            | 380 |
| INL-34031-SMK  | 375 | INL-38239-SNIC | 373 | INL-42284            | 380 |
| INL-34150-3K   | 383 | INL-38609      | 346 | INL-42285            | 380 |
| INL-34150-4K   | 383 | INL-38610      | 346 | INL-42286            | 380 |
| INL-34151-3K   | 383 | INL-38611      | 346 | INL-42287            | 380 |
| INL-34151-4K   | 383 | INL-38612      | 347 | INL-598310-SNIC      | 349 |
| INL-34400      | 385 | INL-38613      | 347 | INL-598410-SNIC      | 348 |
| INL-34401      | 385 | INL-38617-BLK  | 356 | INL-740000-SNIC      | 348 |
| INL-34556-WHT  | 361 | INL-38617-SBRS | 356 | INL-A60-LED-ES-TNT   | 377 |
| INL-34557-WHT  | 360 | INL-38617-SNIC | 356 | INL-C35L-LED-SES-CLR | 377 |
| INL-34942-ABRS | 373 | INL-38617-WHT  | 356 | INL-C35L-LED-SES-TNT | 377 |
| INL-34942-ACOP | 373 | INL-38618-BLK  | 356 | INL-G80-LED-BC-CLR   | 376 |
| INL-35728      | 385 | INL-38618-SBRS | 356 | INL-G80-LED-BC-TNT   | 376 |
| INL-36012      | 379 | INL-38618-SNIC | 356 | INL-G80-LED-ES-CLR   | 376 |
| INL-36013      | 379 | INL-38618-WHT  | 356 | INL-G80-LED-ES-TNT   | 376 |
| INL-36014      | 379 | INL-38619-BLK  | 357 | INL-G95-LED-ES-CLR   | 377 |
| INL-36015      | 379 | INL-38619-WHT  | 357 | INL-G95-LED-ES-TNT   | 377 |
| INL-36016      | 379 | INL-41730-BLK  | 332 | INL-ST64-LED-BC-CLR  | 376 |
| INL-36017      | 379 | INL-41730-WHT  | 332 | INL-ST64-LED-BC-TNT  | 376 |
| INL-37211      | 342 | INL-41731-BLK  | 333 | INL-ST64-LED-ES-CLR  | 376 |
| INL-37213      | 342 | INL-41731-WHT  | 333 | INL-ST64-LED-ES-TNT  | 376 |
| INL-37214      | 342 | INL-41999      | 381 | SP-25202-CHR         | 300 |
| INL-37215      | 347 | INL-42000      | 381 | SP-25203-CHR         | 301 |
| INL-37216      | 347 | INL-42001      | 381 | SP-25204-CHR         | 298 |
| INL-37217      | 347 | INL-42002      | 381 | SP-25211-CHR         | 307 |
| INL-37218      | 347 | INL-42003      | 381 | SP-25253-CHR         | 306 |
| INL-37219      | 344 | INL-42004      | 381 | SP-25254-CHR         | 304 |
| INL-37220      | 345 | INL-42005      | 381 | SP-25255-CHR         | 305 |
| INL-37221      | 344 | INL-42006      | 381 | SP-25256-CHR         | 303 |

# INDEX (ALPHABETICAL)

|                 |         |                |     |                 |         |
|-----------------|---------|----------------|-----|-----------------|---------|
| SP-31449-CHR    | 302     | SPA-31309-CHR  | 254 | SPA-35706       | 289     |
| SP-31450-CHR    | 299     | SPA-31309-MBLK | 254 | SPA-35707       | 291     |
| SPA-19713-CHR   | 243     | SPA-31725-CHR  | 252 | SPA-35708       | 293     |
| SPA-19713-SBRS  | 243     | SPA-31725-SBRS | 252 | SPA-35709       | 266     |
| SPA-19714-CHR   | 241     | SPA-31726-CHR  | 251 | SPA-35710       | 268     |
| SPA-19714-SBRS  | 241     | SPA-31726-SBRS | 251 | SPA-35711       | 265     |
| SPA-20182-CHR   | 244     | SPA-31731-CHR  | 256 | SPA-35712       | 265     |
| SPA-20182-SBRS  | 244     | SPA-31732-CHR  | 255 | SPA-35713       | 266     |
| SPA-20829-CHR   | 254     | SPA-31733-CHR  | 255 | SPA-35714       | 266     |
| SPA-20829-MBLK  | 254     | SPA-31734-CHR  | 255 | SPA-35715       | 266     |
| SPA-20829-SBRS  | 254     | SPA-31736-CHR  | 258 | SPA-35716       | 266     |
| SPA-20831-CHR   | 245     | SPA-31737-CHR  | 258 | SPA-35717       | 267     |
| SPA-20831-SBRS  | 245     | SPA-31780-CHR  | 257 | SPA-35718       | 267     |
| SPA-22560       | 261     | SPA-33929-CHR  | 235 | SPA-35719       | 268     |
| SPA-22560-BRS   | 261     | SPA-33930-CHR  | 237 | SPA-35720       | 268     |
| SPA-22560-MBLK  | 261     | SPA-33931-CHR  | 239 | SPA-35721       | 268     |
| SPA-24467-CHR   | 247     | SPA-33932-CHR  | 239 | SPA-35722       | 268     |
| SPA-24467-SBRS  | 247     | SPA-33974-CHR  | 238 | SPA-35723       | 277/355 |
| SPA-24468-CHR   | 247     | SPA-34008-WHT  | 265 | SPA-35724       | 277/355 |
| SPA-24468-SBRS  | 247     | SPA-34009-WHT  | 267 | SPA-35725       | 277/355 |
| SPA-24677-CHR   | 233     | SPA-34010-SNIC | 265 | SPA-35726       | 277/355 |
| SPA-24678-CHR   | 234     | SPA-34011-SNIC | 267 | SPA-35727       | 277/355 |
| SPA-24869-BRS   | 246     | SPA-34012-CHR  | 265 | SPA-35782-CHR   | 222     |
| SPA-24869-SBRS  | 246     | SPA-34013-CHR  | 267 | SPA-35783-CHR   | 222     |
| SPA-24870-CHR   | 246     | SPA-34035      | 283 | SPA-35808-CHR   | 222     |
| SPA-24870-SBRS  | 246     | SPA-34036      | 284 | SPA-35809-CHAMP | 223     |
| SPA-24871-BRS   | 246     | SPA-34037      | 285 | SPA-35809-CHR   | 223     |
| SPA-24871-SBRS  | 246     | SPA-34038      | 286 | SPA-35810-CHAMP | 223     |
| SPA-27405-BRS   | 260     | SPA-34039      | 287 | SPA-35810-CHR   | 223     |
| SPA-27405-CHR   | 260     | SPA-34046-BRS  | 262 | SPA-35811-CHAMP | 224     |
| SPA-27405-MBLK  | 260     | SPA-34046-CHR  | 262 | SPA-35811-CHR   | 224     |
| SPA-28326-CHR   | 249     | SPA-34046-SBLK | 262 | SPA-35828-CHR   | 225     |
| SPA-28327-CHR   | 249     | SPA-34046-SNIC | 262 | SPA-35828-SBRS  | 225     |
| SPA-29195-CHR   | 249     | SPA-34047-BRS  | 262 | SPA-35829-CHR   | 225     |
| SPA-30841-BRCOP | 279/354 | SPA-34047-CHR  | 262 | SPA-35829-SBRS  | 225     |
| SPA-30841-MBLK  | 279/354 | SPA-34047-SBLK | 262 | SPA-35830-SBRS  | 224     |
| SPA-30841-MWHT  | 279/354 | SPA-34047-SNIC | 262 | SPA-35836-CHR   | 226     |
| SPA-30842-CHR   | 279/354 | SPA-34049-BRS  | 263 | SPA-35836-SBRS  | 226     |
| SPA-30842-SBRS  | 279/354 | SPA-34049-CHR  | 263 | SPA-35837-CHR   | 226     |
| SPA-30842-SCHR  | 279/354 | SPA-34049-SBLK | 263 | SPA-35837-SBRS  | 226     |
| SPA-30993-CHR   | 280/359 | SPA-34049-SNIC | 263 | SPA-35838-CHR   | 227     |
| SPA-30993-MBLK  | 280/359 | SPA-34050-BRS  | 263 | SPA-35838-SBRS  | 227     |
| SPA-30993-SBRS  | 280/359 | SPA-34050-CHR  | 263 | SPA-35839-CLR   | 229     |
| SPA-30993-SNIC  | 280/359 | SPA-34050-SBLK | 263 | SPA-35839-SMK   | 229     |
| SPA-31306-BRS   | 253     | SPA-34050-SNIC | 263 | SPA-35840-SMK   | 228     |
| SPA-31306-CHR   | 253     | SPA-34865      | 295 | SPA-35841-CLR   | 228     |
| SPA-31306-MBLK  | 253     | SPA-35080-CHR  | 259 | SPA-35841-SMK   | 228     |
| SPA-31309-BRS   | 254     | SPA-35081-CHR  | 259 | SPA-35843-CHR   | 229     |

# INDEX (ALPHABETICAL)

|                 |         |                   |     |                 |     |
|-----------------|---------|-------------------|-----|-----------------|-----|
| SPA-35843-SBRS  | 229     | SPA-41225-SBLK    | 216 | SXLS38691E      | 388 |
| SPA-36129-CHR   | 230     | SPA-41694-CHR     | 217 | SXLS38693E      | 389 |
| SPA-36140-CHR   | 231     | SPA-41694-MBLK    | 217 | SXLS38694E      | 389 |
| SPA-36300-CHR   | 219     | SPA-41694-SNIC    | 217 | SXLS38695E      | 389 |
| SPA-36301-CHR   | 219     | SPA-6888.014      | 281 | SXLS38696E      | 389 |
| SPA-36302-CHR   | 221     | SPA-6888.014-SBRS | 281 | SXLS38697E      | 389 |
| SPA-36303-CHR   | 221     | SPA-PR-12744      | 278 | SXLS38927E      | 390 |
| SPA-36309-CHR   | 220     | SPA-PR-17146      | 279 | SXLS38928E      | 390 |
| SPA-36310-CHR   | 220     | SPA-PRI3145       | 282 | SXLS38929E      | 390 |
| SPA-36311-CHR   | 220     | SPA-PRI3145-MBLK  | 282 | SXLS38930E      | 390 |
| SPA-37153       | 294     | SPA-PRI3145-SBRS  | 282 | SXLS38933E      | 391 |
| SPA-38570-ACOP  | 274/209 | SXLS31324ES       | 412 | SXLS38934E      | 391 |
| SPA-38570-BCHR  | 274/209 | SXLS31325ES       | 416 | SXLS38935E      | 391 |
| SPA-38570-CHR   | 274/209 | SXLS31326E        | 415 | SXLS38936E      | 391 |
| SPA-38570-MWHT  | 274/209 | SXLS31329E        | 404 | SXLS38937E      | 392 |
| SPA-38570-SBLK  | 274/209 | SXLS31330E        | 404 | SXLS38938E      | 392 |
| SPA-38570-SBRS  | 274/209 | SXLS31331E        | 417 | SXLS38939E      | 392 |
| SPA-38570-SNIC  | 274/209 | SXLS31332E        | 419 | SXLS38940E      | 392 |
| SPA-38571-ACOP  | 274/209 | SXLS31334E        | 420 | SXLS38941E      | 393 |
| SPA-38571-BCHR  | 274/209 | SXLS31335E        | 420 | SXLS38942E      | 393 |
| SPA-38571-CHR   | 274/209 | SXLS31336E        | 420 | SXLS38943E      | 393 |
| SPA-38571-MWHT  | 274/209 | SXLS31337E        | 420 | SXLS38944E      | 393 |
| SPA-38571-SBLK  | 274/209 | SXLS31338E        | 420 | SXLS50100E      | 396 |
| SPA-38571-SBRS  | 274/209 | SXLS31339E        | 420 | SXLS50101E      | 397 |
| SPA-38571-SNIC  | 274/209 | SXLS31340E        | 420 | SXLS50102E      | 398 |
| SPA-38572-ACOP  | 210/275 | SXLS31361E        | 422 | SXLS50103E      | 399 |
| SPA-38572-BCHR  | 210/275 | SXLS31362E        | 423 | SXLS50104E      | 402 |
| SPA-38572-CHR   | 210/275 | SXLS31362ES       | 423 | SXLS50105E      | 400 |
| SPA-38572-MWHT  | 210/275 | SXLS34624/31333LE | 403 | SXLS50106E      | 401 |
| SPA-38572-SBLK  | 210/275 | SXLS35525E        | 411 | ZN-20930-BLK    | 30  |
| SPA-38572-SBRS  | 210/275 | SXLS35526E        | 411 | ZN-20930-SIL    | 30  |
| SPA-38572-SNIC  | 210/275 | SXLS35527E        | 411 | ZN-20941-Anth   | 13  |
| SPA-38573-CHR   | 218     | SXLS36383E        | 410 | ZN-20941-BLK    | 13  |
| SPA-38573-SBRS  | 218     | SXLS36384E        | 410 | ZN-20941-COP    | 13  |
| SPA-38573-TBLK  | 218     | SXLS36385E        | 410 | ZN-20941-POLSST | 13  |
| SPA-38574-CHR   | 221     | SXLS36986E        | 414 | ZN-20941-SST    | 13  |
| SPA-38575-CHR   | 221     | SXLS37177E        | 413 | ZN-20941-WHT    | 13  |
| SPA-38576-CHR   | 218     | SXLS37178E        | 413 | ZN-20944-ANTH   | 47  |
| SPA-38576-SBRS  | 218     | SXLS37179E        | 413 | ZN-20944-BLK    | 47  |
| SPA-38576-TBLK  | 218     | SXLS37180E        | 421 | ZN-20944-SIL    | 47  |
| SPA-38577-BRCOP | 277/355 | SXLS37182E        | 407 | ZN-20945-BLK    | 46  |
| SPA-41111-BLK   | 272/207 | SXLS37673E        | 405 | ZN-20945-SST    | 46  |
| SPA-41111-CHR   | 272/207 | SXLS37951E        | 409 | ZN-20955-BLK    | 57  |
| SPA-41111-SBRS  | 272/207 | SXLS37952E        | 408 | ZN-20955-DOVG   | 57  |
| SPA-41111-WHT   | 272/207 | SXLS38687E        | 388 | ZN-20955-IVO    | 57  |
| SPA-41112       | 208/273 | SXLS38688E        | 388 | ZN-20955-MINT   | 57  |
| SPA-41223-CHR   | 216     | SXLS38689E        | 388 | ZN-20955-PBLU   | 57  |
| SPA-41224-SBRS  | 216     | SXLS38690E        | 388 | ZN-20957-BLK    | 55  |

# INDEX (ALPHABETICAL)

|               |     |                  |     |               |     |
|---------------|-----|------------------|-----|---------------|-----|
| ZN-20957-DOVG | 55  | ZN-29993-BLK     | 26  | ZN-34042-ANTH | 35  |
| ZN-20957-IVO  | 55  | ZN-29995-BLK     | 24  | ZN-34043-ANTH | 35  |
| ZN-20957-MINT | 55  | ZN-29996-BLK     | 24  | ZN-34044-BLK  | 78  |
| ZN-20957-PBLU | 55  | ZN-29997-BLK     | 70  | ZN-34555-BLK  | 33  |
| ZN-20965-BLK  | 69  | ZN-31385         | 86  | ZN-34555-SST  | 33  |
| ZN-20965-SST  | 69  | ZN-31386         | 86  | ZN-34870      | 87  |
| ZN-23454-BLK  | 83  | ZN-31757-ANTH    | 53  | ZN-35072-BLK  | 11  |
| ZN-23454-WHT  | 83  | ZN-31757-MINT    | 53  | ZN-35593-BLK  | 37  |
| ZN-24507-SST  | 58  | ZN-31757-PBLU    | 53  | ZN-35594-BLK  | 37  |
| ZN-25151-BLK  | 115 | ZN-31758-ANTH    | 31  | ZN-35685-BLK  | 37  |
| ZN-25151-DGRY | 115 | ZN-31758-SIL     | 31  | ZN-35686-BLK  | 37  |
| ZN-25151-WHT  | 115 | ZN-31759-ANTH    | 31  | ZN-35687-BLK  | 80  |
| ZN-25152-BLK  | 119 | ZN-31759-SIL     | 31  | ZN-35687-DGRY | 80  |
| ZN-25152-DGRY | 119 | ZN-31765-BLK     | 39  | ZN-35687-WHT  | 80  |
| ZN-25152-WHT  | 119 | ZN-31767-BLK     | 27  | ZN-35688-BLK  | 81  |
| ZN-25153-WHT  | 120 | ZN-31768-BLK     | 27  | ZN-35688-DGRY | 81  |
| ZN-25154-WHT  | 117 | ZN-31805-WHT     | 121 | ZN-35688-WHT  | 81  |
| ZN-25155-WHT  | 120 | ZN-31807-TBLK    | 58  | ZN-35689-BLK  | 79  |
| ZN-25156-BLK  | 121 | ZN-31808-POLSSST | 56  | ZN-35690-WHT  | 114 |
| ZN-25340-SST  | 61  | ZN-31809-IVO     | 56  | ZN-35691-BLK  | 114 |
| ZN-25463-BLK  | 60  | ZN-31809-PBLU    | 56  | ZN-35738-BLK  | 70  |
| ZN-25464-BLK  | 60  | ZN-31809-SST     | 56  | ZN-35739-BLK  | 22  |
| ZN-26536-ANTH | 19  | ZN-32069-BLK     | 42  | ZN-35740-BLK  | 22  |
| ZN-26536-BLK  | 19  | ZN-32070-ANTH    | 49  | ZN-35741-BLK  | 25  |
| ZN-26536-COP  | 19  | ZN-32070-BLK     | 49  | ZN-37052-BLK  | 136 |
| ZN-26536-SST  | 19  | ZN-32255-BLK     | 11  | ZN-37938-ANTH | 16  |
| ZN-26536-WHT  | 19  | ZN-33394-BLK     | 67  | ZN-37938-BLK  | 16  |
| ZN-28708-BLK  | 61  | ZN-33394-SST     | 67  | ZN-37938-COP  | 16  |
| ZN-28708-SST  | 61  | ZN-33460-BLK     | 33  | ZN-37938-SST  | 16  |
| ZN-29177-WHT  | 117 | ZN-33460-SST     | 33  | ZN-37938-WHT  | 16  |
| ZN-29179-ANTH | 14  | ZN-33579-BLK     | 115 | ZN-37939-ANTH | 15  |
| ZN-29179-BLK  | 14  | ZN-33579-WHT     | 115 | ZN-37939-BLK  | 15  |
| ZN-29179-COP  | 14  | ZN-33615-BLK     | 116 | ZN-37939-COP  | 15  |
| ZN-29179-SST  | 14  | ZN-33615-WHT     | 116 | ZN-37939-SST  | 0   |
| ZN-29180-BLK  | 21  | ZN-33994-BLK     | 61  | ZN-37939-WHT  | 15  |
| ZN-29180-SST  | 21  | ZN-33995-BLK     | 61  | ZN-37940-ANTH | 17  |
| ZN-29181-BLK  | 30  | ZN-34002-SST     | 41  | ZN-37940-BLK  | 17  |
| ZN-29181-SIL  | 30  | ZN-34003-BLK     | 41  | ZN-37940-COP  | 17  |
| ZN-29184-BLK  | 69  | ZN-34018-SBLK    | 21  | ZN-37940-SST  | 17  |
| ZN-29185-WHT  | 121 | ZN-34018-SST     | 21  | ZN-37940-WHT  | 17  |
| ZN-29186-WHT  | 123 | ZN-34019-ANTH    | 38  | ZN-38205-ANTH | 45  |
| ZN-29187-WHT  | 123 | ZN-34019-BLK     | 38  | ZN-38205-BLK  | 45  |
| ZN-29189-ATR  | 35  | ZN-34019-WHT     | 38  | ZN-38205-SIL  | 45  |
| ZN-29190-ATR  | 35  | ZN-34020-ANTH    | 38  | ZN-38354-BLK  | 44  |
| ZN-29347-Anth | 39  | ZN-34020-BLK     | 38  | ZN-38354-SIL  | 44  |
| ZN-29347-BLK  | 39  | ZN-34020-WHT     | 38  | ZN-38599-BLK  | 122 |
| ZN-29347-SIL  | 39  | ZN-34022-BLK     | 14  | ZN-38600-WHT  | 122 |
| ZN-29992-BLK  | 32  | ZN-34022-SST     | 14  | ZN-38602-BLK  | 50  |

# INDEX (ALPHABETICAL)

|               |     |                  |          |               |     |
|---------------|-----|------------------|----------|---------------|-----|
| ZN-38603-BLK  | 42  | ZN-38869         | 113      | ZN-42039      | 132 |
| ZN-38605-BLK  | 59  | ZN-38870         | 112      | ZN-42040      | 133 |
| ZN-38605-WHT  | 59  | ZN-38871         | 113      | ZN-42041      | 133 |
| ZN-38606-BLK  | 59  | ZN-39171-ANTH    | 62       | ZN-42042      | 138 |
| ZN-38606-WHT  | 59  | ZN-39171-BLK     | 62       | ZN-42043      | 130 |
| ZN-38614-BLK  | 65  | ZN-39172-ANTH    | 62       | ZN-42044      | 130 |
| ZN-38614-SST  | 65  | ZN-39172-BLK     | 62       | ZN-42045      | 134 |
| ZN-38615-BLK  | 64  | ZN-39173-ANTH    | 63       | ZN-42046      | 134 |
| ZN-38615-SST  | 64  | ZN-39173-BLK     | 63       | ZN-42047      | 134 |
| ZN-38616-BLK  | 65  | ZN-39742-BLK     | 82       | ZN-42048      | 135 |
| ZN-38616-SST  | 65  | ZN-39746-BLK     | 82       | ZN-42049      | 135 |
| ZN-38620-BLK  | 51  | ZN-39998-BLK     | 64       | ZN-42050      | 143 |
| ZN-38621-ANTH | 28  | ZN-39998-SST     | 64       | ZN-42051      | 141 |
| ZN-38621-BLK  | 28  | ZN-40001-ANTH    | 7        | ZN-42052      | 141 |
| ZN-38621-WHT  | 28  | ZN-40001-BLK     | 7        | ZN-42053      | 141 |
| ZN-38622-ANTH | 29  | ZN-40002-ANTH    | 48       | ZN-42054      | 140 |
| ZN-38622-BLK  | 29  | ZN-40002-BLK     | 48       | ZN-42055      | 140 |
| ZN-38622-WHT  | 29  | ZN-40002-SIL     | 48       | ZN-42056      | 139 |
| ZN-38623-ANTH | 27  | ZN-40004-BLK/BRS | 40       | ZN-42057      | 145 |
| ZN-38624-ANTH | 27  | ZN-40004-BLK/SST | 40       | ZN-42058      | 146 |
| ZN-38627-BLK  | 80  | ZN-40063         | 76       | ZN-42059      | 147 |
| ZN-38627-DGRY | 80  | ZN-40064         | 76       | ZN-42060      | 148 |
| ZN-38627-WHT  | 80  | ZN-40065         | 77       | ZN-42066-BLK  | 8   |
| ZN-38628-BLK  | 81  | ZN-40066         | 77       | ZN-42095-BLK  | 8   |
| ZN-38628-DGRY | 81  | ZN-41099-GRYSMK  | 10       | ZN-42097-BLK  | 68  |
| ZN-38628-WHT  | 81  | ZN-41100-GRYSMK  | 10       | ZN-42098-BLK  | 68  |
| ZN-38630-BLK  | 59  | ZN-41101-BRNZ    | 6        | ZN-42229      | 149 |
| ZN-38631-BLK  | 26  | ZN-41101-RBRS    | 6        | ZN-42263      | 74  |
| ZN-38634-BLK  | 23  | ZN-41102-BRNZ    | 6        | ZR-32297-BLK  | 95  |
| ZN-38636-ANTH | 32  | ZN-41102-RBRS    | 6        | ZR-32298-BLK  | 91  |
| ZN-38636-WHT  | 32  | ZN-41106         | 74       | ZR-32299-BLK  | 93  |
| ZN-38637-BLK  | 23  | ZN-41711-GRYSMK  | 10       | ZR-32300-BLK  | 107 |
| ZN-38640-MBLK | 43  | ZN-41732         | 72       | ZR-32301-BLK  | 103 |
| ZN-38641-MBLK | 43  | ZN-41733         | 72       | ZR-32302-BLK  | 90  |
| ZN-38688-BLK  | 84  | ZN-41734         | 73       | ZR-32328-BLK  | 104 |
| ZN-38689-BLK  | 84  | ZN-41735         | 73       | ZR-37441-BLK  | 106 |
| ZN-38690-BLK  | 84  | ZN-41736         | 71       | ZR-37442-GMTL | 109 |
| ZN-38691-BLK  | 84  | ZN-41737         | 71       | ZR-37443-BLK  | 101 |
| ZN-38692-BLK  | 84  | ZN-41738         | 71/72/73 | ZR-37444-BLK  | 105 |
| ZN-38694-BLK  | 85  | ZN-41739         | 71/72/73 | ZR-37445-BLK  | 111 |
| ZN-38695-BLK  | 85  | ZN-42019-COP     | 9        | ZR-37448-BLK  | 110 |
| ZN-38696-BLK  | 85  | ZN-42019-SST     | 9        | ZR-38155-SIL  | 89  |
| ZN-38863      | 112 | ZN-42031         | 127      | ZR-38156-BLK  | 100 |
| ZN-38864      | 112 | ZN-42032         | 127      | ZR-38529-SIL  | 98  |
| ZN-38865      | 112 | ZN-42033         | 129      | ZR-38532-SIL  | 97  |
| ZN-38866      | 113 | ZN-42034         | 129      | ZR-38831-SIL  | 97  |
| ZN-38867      | 113 | ZN-42035         | 131      | ZR-38833-BLK  | 99  |
| ZN-38868      | 113 | ZN-42037         | 137      | ZR-38834-BLK  | 99  |